

General Description

The HM5301 is a 3CH power management IC for applications powered by one Li-Ion battery or a DC 5V adapter. It integrates three synchronous buck converters and can provide high efficiency output at light load and heavy load operation. The internal compensation architecture simplifies the application circuit design. Besides, the independent enable control makes the designer have the greatest flexibility to optimize timing for power sequencing purposes. The HM5301 is available in a 20 pin QFN 3x3 package.

Features


- ▶ 2.7V to 5.5V Input Voltage Range
- ▶ Three Buck Converters
Output Voltage Range: 0.6V to V_{in}
CH1, CH2, CH3 Continuous Load Current / Peak Current: 1A, 1A, 1A / 1.2A, 1.5A, 1.2A
(3CH total output power consumption must be less than 6W)
- Fixed 1.5MHz Switching Frequency
- 100% Duty Cycle Low Dropout Operation
- <1uA Shutdown Current
- Independent Enable Control
- Internal Compensation
- Cycle-by-Cycle Current Limit
- Short Circuit Protection
- ▶ Auto Recovery OTP Protection
- ▶ Input OVP Architecture
- ▶ Available in 20-pin 3mm x 3mm QFN Package

Applications

- ▶ Smart Phone
- ▶ IP Camera
- ▶ Digital Camera



Pin Configurations

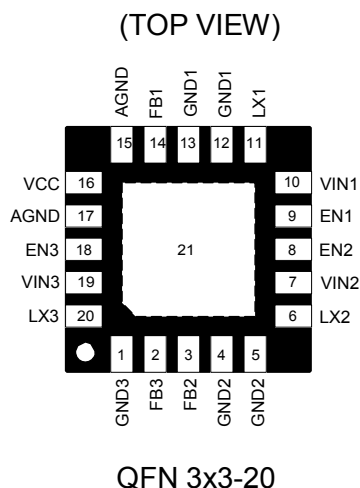

3CH Power Management IC

Datasheet

Pin Description

| Pin Name | Function Description | Pin No. |
|-------------|---|---------|
| GND3 | Power ground pin of CH3. | 1 |
| FB3 | Feedback input of CH3. Connect to output voltage with a resistor divider. | 2 |
| FB2 | Feedback input of CH2. Connect to output voltage with a resistor divider. | 3 |
| GND2 | Power ground pin of CH2. | 4, 5 |
| LX2 | Internal MOSFET switching output of CH2. Connect LX2 pin with a low pass filter circuit to obtain a stable DC output voltage. | 6 |
| VIN2 | Power input pin of CH2. Recommended to use a 10uF MLCC capacitor between VIN2 pin and GND2 pin. | 7 |
| EN2 | CH2 turns on/turns off control input. Don't leave this pin floating. | 8 |
| EN1 | CH1 turns on/turns off control input. Don't leave this pin floating. | 9 |
| VIN1 | Power input pin of CH1. Recommended to use a 10uF MLCC capacitor between VIN1 pin and GND1 pin. | 10 |
| LX1 | Internal MOSFET switching output of CH1. Connect LX1 pin with a low pass filter circuit to obtain a stable DC output voltage. | 11 |
| GND1 | Power ground pin of CH1. | 12, 13 |
| FB1 | Feedback input of CH1. Connect to output voltage with a resistor divider. | 14 |
| AGND | Analog ground pin. | 15, 17 |
| VCC | Input supply pin for internal control circuit. | 16 |
| EN3 | CH3 turns on/turns off control input. Don't leave this pin floating. | 18 |
| VIN3 | Power input pin of CH3. Recommended to use a 10uF MLCC capacitor between VIN3 pin and GND3 pin. | 19 |
| LX3 | Internal MOSFET switching output of CH3. Connect SW3 pin with a low pass filter circuit to obtain a stable DC output voltage. | 20 |
| Exposed Pad | The Exposed Pad must be soldered to a large PCB copper plane and connected to GND for appropriate dissipation. | 21 |

Function Block Diagram

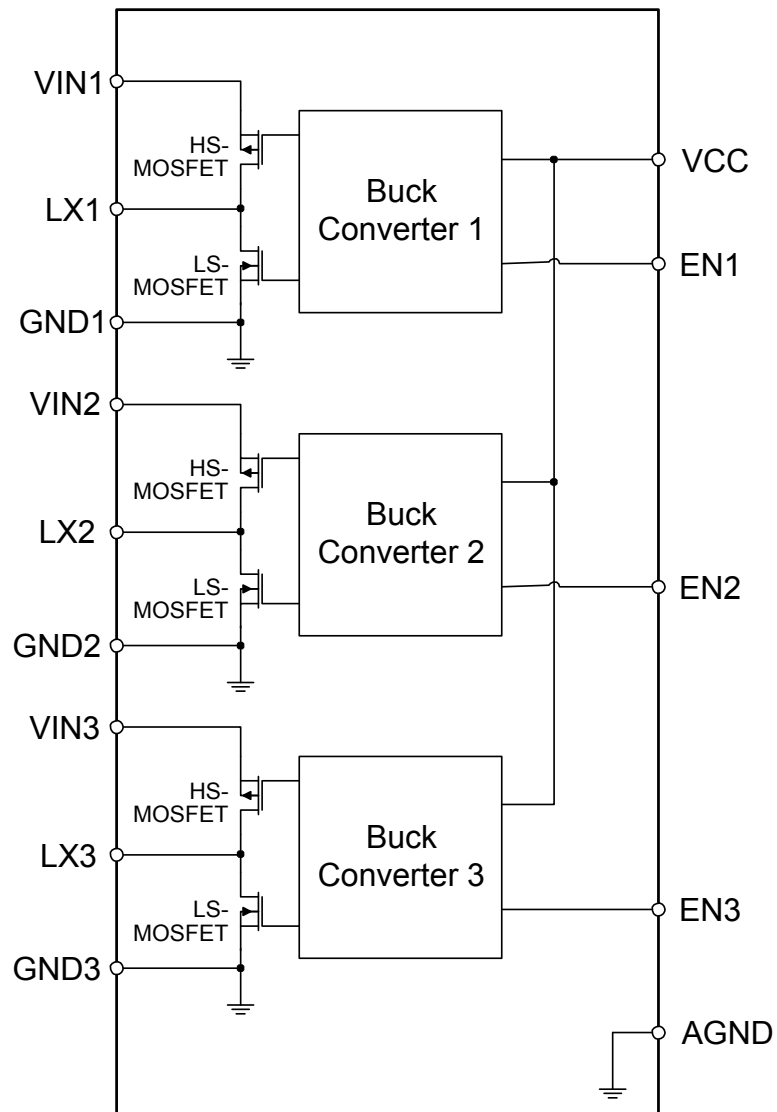


Figure 1. HM5301 internal function block diagram

3CH Power Management IC

Datasheet

Absolute Maximum Ratings

| Parameter | Value |
|--|--------------------------|
| Input Voltage (V_{VIN1} , V_{VIN2} , V_{VIN3} , V_{VCC}) | -0.3V to +6.5V |
| SW Pin Voltage (V_{LX1} , V_{LX2} , V_{LX3}) | -0.3V to $V_{VINX}+0.3V$ |
| All Other Pins Voltage | -0.3V to +6.5V |
| Ambient Temperature operating Range (T_A) | -40°C to +85°C |
| Maximum Junction Temperature (T_{Jmax}) | +150°C |
| Lead Temperature (Soldering, 10 sec) | +260°C |
| Storage Temperature Range (T_S) | -65°C to +150°C |

Note (1): Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Exposure to "Absolute Maximum Ratings" conditions for extended periods may affect device reliability and lifetime.

Package Thermal Characteristics

| Parameter | Value |
|---|---------|
| QFN 3x3-20 Thermal Resistance (θ_{JC}) | 7.5°C/W |
| QFN 3x3-20 Thermal Resistance (θ_{JA}) | 67°C/W |
| QFN 3x3-20 Power Dissipation at $T_A=25^\circ\text{C}$ (P_{Dmax}) | 1.87W |

Note (1): P_{Dmax} is calculated according to the formula: $P_{Dmax}=(T_{JMAX}-T_A)/\theta_{JA}$.

Recommended Operating Conditions

| Parameter | Value |
|--|-----------------|
| Input Voltage (V_{VIN1} , V_{VIN2} , V_{VIN3} , V_{VCC}) | +2.7V to +5.5V |
| Junction Temperature Range (T_J) | -40°C to +125°C |

Electrical Characteristics

$V_{INX}=5V$, $V_{VCC}=5V$, $T_A=25^{\circ}C$, unless otherwise noted

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--------------------------------|----------------|------------------------------------|-------|-----|-------|------|
| Input Supply Voltage | | | | | | |
| Input Voltage | V_{INX} | | 2.7 | | 5.5 | V |
| Control Circuit Input Voltage | V_{VCC} | | 2.7 | | 5.5 | V |
| Quiescent Current | $I_{Q-total}$ | $V_{FB1} = V_{FB2} = V_{FB3} = 1V$ | | 185 | 250 | uA |
| Buck Converter 1, 2, 3 | | | | | | |
| Shutdown Supply Current | I_{SD} | $V_{EN} = 0V$ | | 0.1 | 1 | uA |
| UVLO Threshold | V_{UVLO} | V_{VIN} Rising | 1.7 | 1.9 | 2.1 | V |
| UVLO Hysteresis | $V_{UV-HYST}$ | | | 0.1 | | V |
| Output Load Current | I_{LOAD} | | | 1 | 1.5 | A |
| Reference Voltage | V_{REF} | | 0.588 | 0.6 | 0.612 | V |
| Switching Frequency | F_{SW} | $I_{LOAD} = 100mA$ | 1 | 1.5 | 2 | MHz |
| Short Frequency | $F_{SW-SHORT}$ | $V_{OUT} = 0V$ | | 330 | | KHz |
| CH1, CH3 PMOS Current Limit | I_{LIM-P} | | 1.5 | 2 | | A |
| CH2 PMOS Current Limit | I_{LIM-P} | | 1.7 | 2.2 | | A |
| PMOS On-Resistance | $R_{DS(ON)-P}$ | $I_{LOAD} = 100mA$ | | 120 | | mΩ |
| NMOS On-Resistance | $R_{DS(ON)-N}$ | $I_{LOAD} = 100mA$ | | 110 | | mΩ |
| Enable Pin Input Low Voltage | V_{EN-L} | | | | 0.4 | V |
| Enable Pin Input High Voltage | V_{EN-H} | | 2 | | | V |
| Maximum Duty Cycle | D_{MAX} | | 100 | | | % |
| Input OVP Threshold Voltage | V_{OVP} | V_{IN} rising | | 6.3 | | V |
| Input OVP Threshold Hysteresis | $V_{OVP-HYST}$ | | | 150 | | mV |
| Thermal Shutdown | | | | | | |
| Thermal Shutdown Threshold | T_{OTP} | | | 165 | | °C |
| Thermal Shutdown Hysteresis | T_{HYST} | | | 30 | | °C |

Note (1): MOSFET on-resistance specifications are guaranteed by correlation to wafer level measurements.

(2): Thermal shutdown specifications are guaranteed by correlation to the design and characteristics analysis.

3CH Power Management IC

Datasheet

Application Circuit Diagram

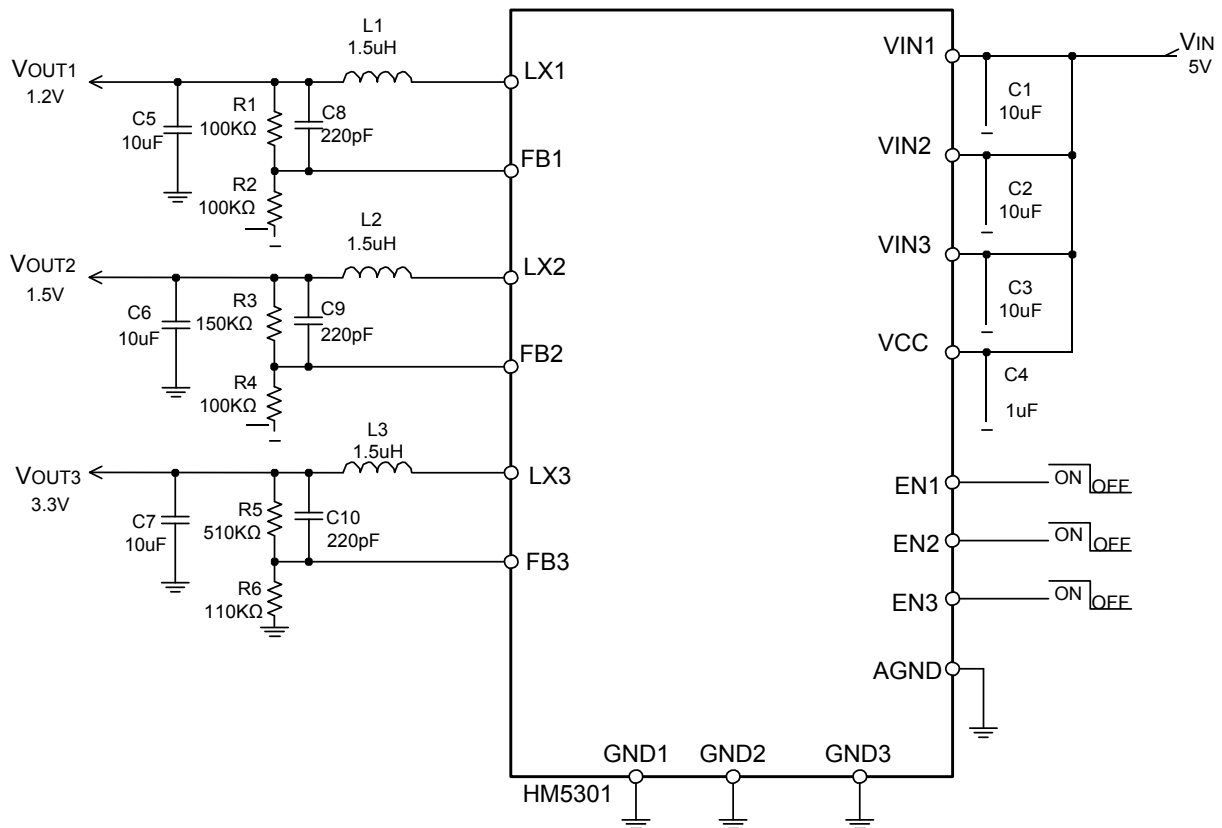


Figure 2. Typical application circuit diagram

Ordering Information







| Part Number | Package Type | Packing Information |
|-------------|------------------|---------------------|
| HM5301ÛÛ | QFN 3mm x 3mm-20 | Tape & Reel / 3000 |

Note (1): "Q": Package type code.

(2): "R": Tape & Reel.


Typical Operating Characteristics

$V_{IN}=5V$, $V_{VCC}=5V$, $V_{OUT1}=3.3V$, $V_{OUT2}=1.5V$, $V_{OUT3}=1.2V$, $L1=1.5\mu H$, $L2=1.5\mu H$, $L3=1.5\mu H$, $T_A=25^\circ C$, unless otherwise noted

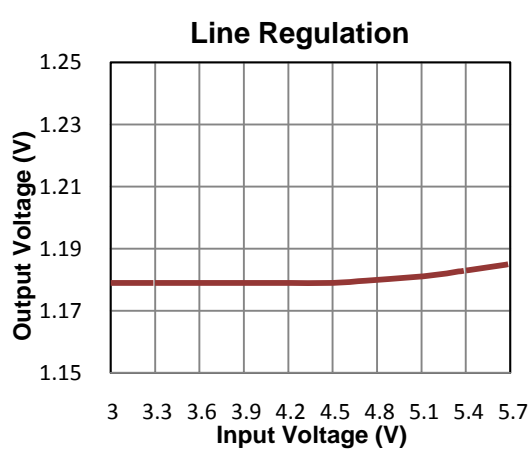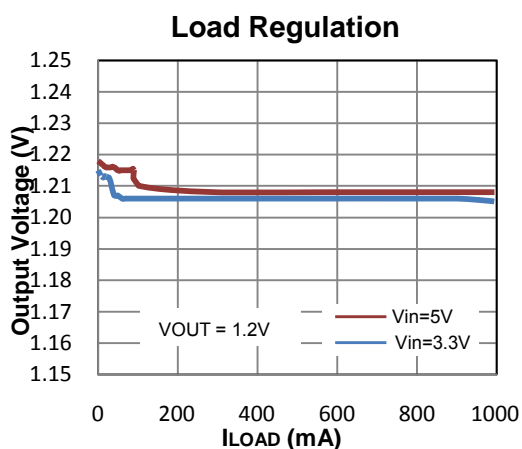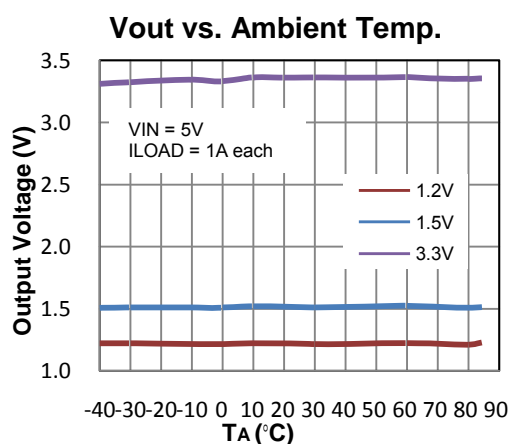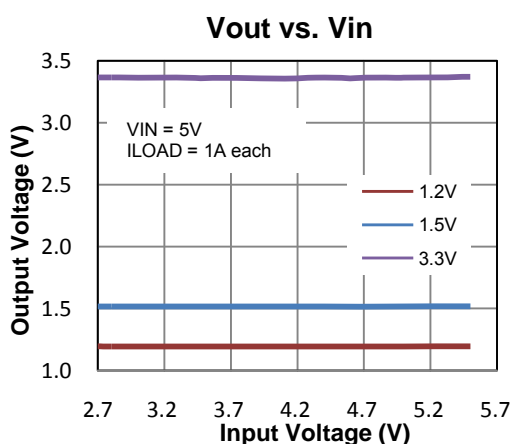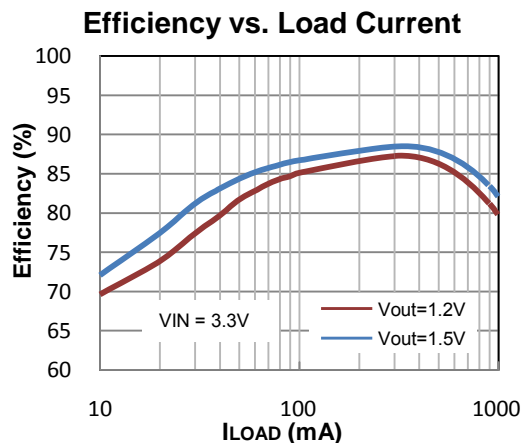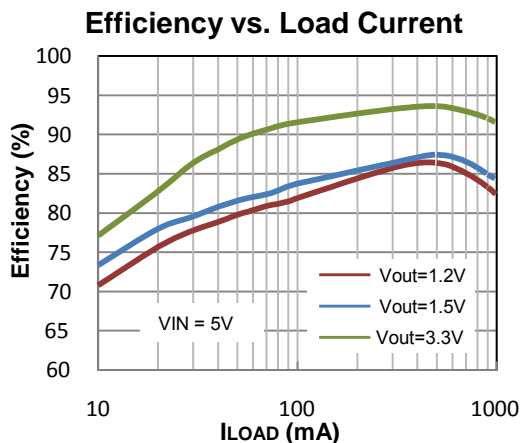


Typical Operating Characteristics


$V_{IN}=5V$, $V_{VCC}=5V$, $V_{OUT1}=3.3V$, $V_{OUT2}=1.5V$, $V_{OUT3}=1.2V$, $L1=1.5\mu H$, $L2=1.5\mu H$, $L3=1.5\mu H$, $T_A=25^\circ C$, unless otherwise noted

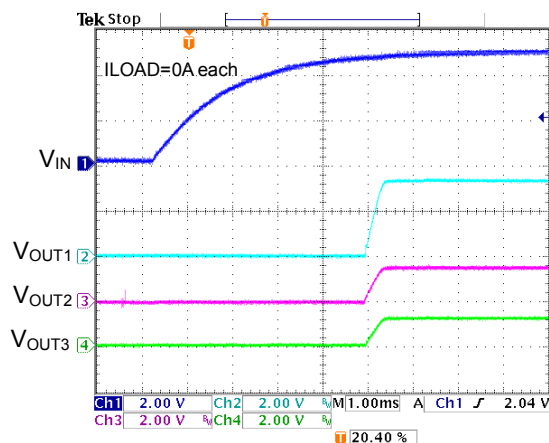


VIN Power On Waveform

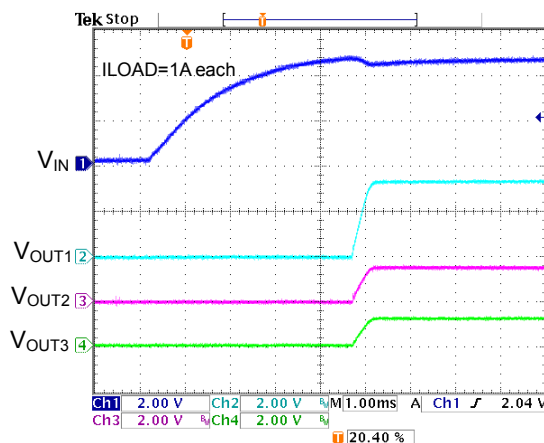


VIN Power On Waveform

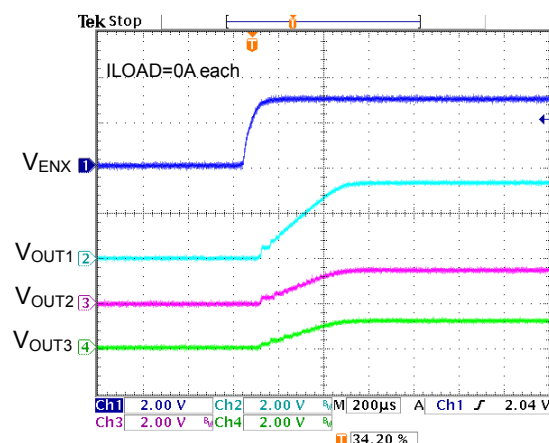


EN Power On Waveform

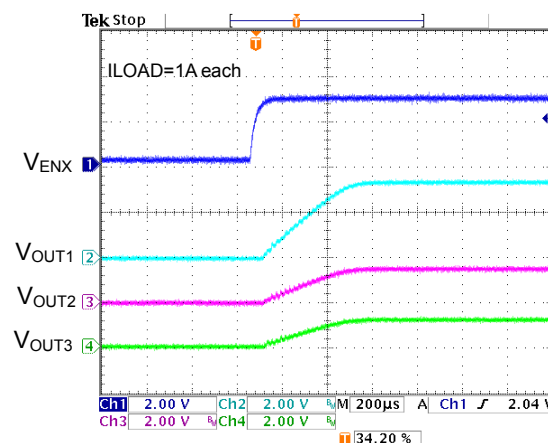

EN Power On Waveform

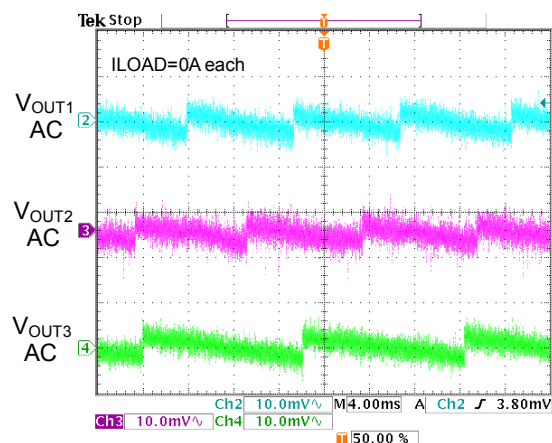


Output Ripple Waveform

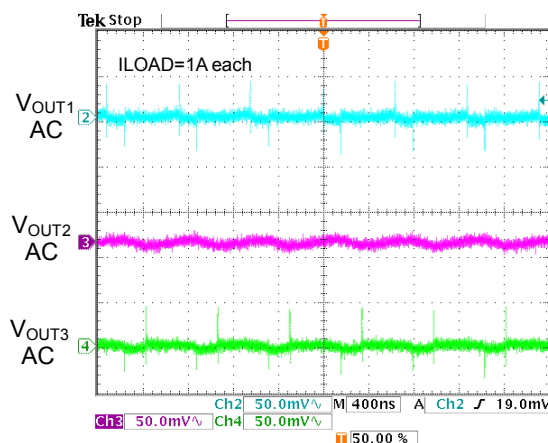


Output Ripple Waveform

Typical Operating Characteristics

$V_{IN}=5V$, $V_{VCC}=5V$, $V_{OUT1}=3.3V$, $V_{OUT2}=1.5V$, $V_{OUT3}=1.2V$, $L1=1.5\mu H$, $L2=1.5\mu H$, $L3=1.5\mu H$, $T_A=25^\circ C$, unless otherwise noted

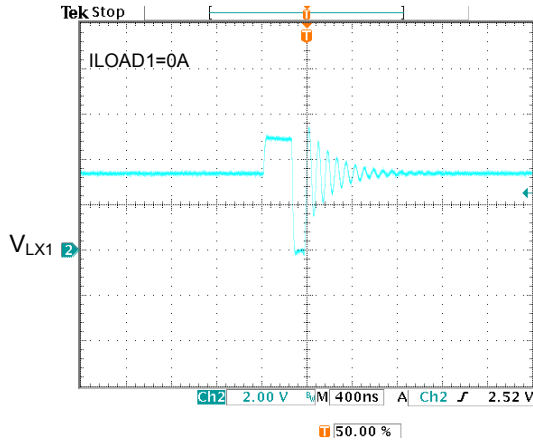

V_{LX1} Switching Waveform

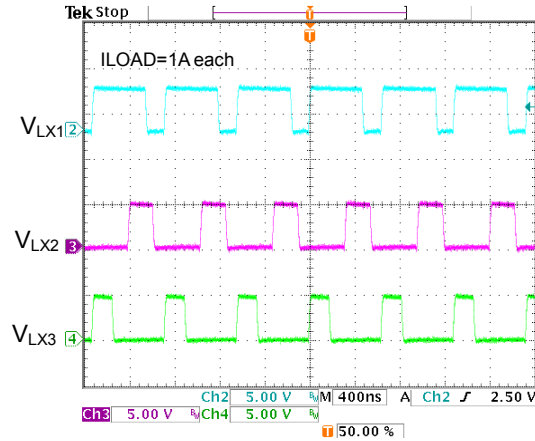

$V_{LX1,2,3}$ Switching Waveform


Functional Description

PFM/PWM Operation

Each of the buck regulators can be operated at PFM/PWM mode. If the output current is less than 150mA (typ.), the regulators automatically enters the PFM mode. The output voltages and output ripples at PFM mode are higher than the output voltages and output ripples at PWM mode. But at very light load, the PFM mode operation provides higher efficiency than PWM mode operation.

Enable Control

The HM5301 is a high efficiency Power Management IC which is designed for IPC applications. It incorporates three 1A synchronous buck regulators and can be controlled by individual EN pins. The start-up time for each channel can be programmed by using the circuit shown as below:

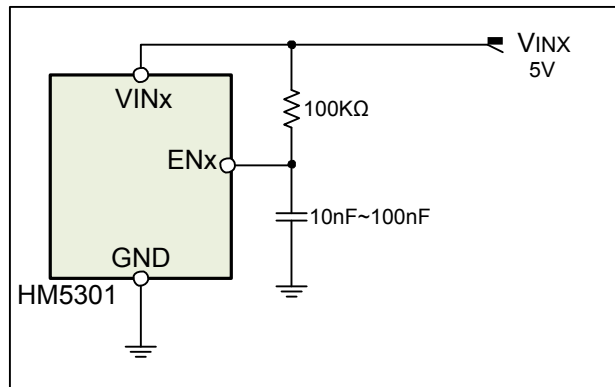

180° Phases Shifted Architecture

In order to reduce the input ripple current, the HM5301 applied 180° phases shifted architecture. Buck1 and Buck3 have the same phase and Buck2 is 180° out of phase. This architecture allows the system board has less ripple current, and thus can reduce EMI.

Over Current Protection

The HM5301 internal three regulators have their own cycle-by-cycle current limit circuits. When the inductor peak current exceeds the current limit threshold, the output voltage starts to drop until FB pin voltage is below the threshold, typically 30% below the reference. Once the threshold is triggered, the switching frequency is reduced to 330KHz (typ.).

Thermal Shutdown


The HM5301 will automatically disabled if the die temperature is higher than the thermal shutdown threshold point. To avoid unstable operation, the hysteresis of thermal shutdown is about 30°C.

Application Information

Output Voltage Setting

Each of the regulators output voltage can be set via a resistor divider (ex. R1, R2). The output voltage is calculated by following equation:

$$V_{OUT1} = 0.6 \times \frac{R1}{R2} + 0.6 \text{ V}$$

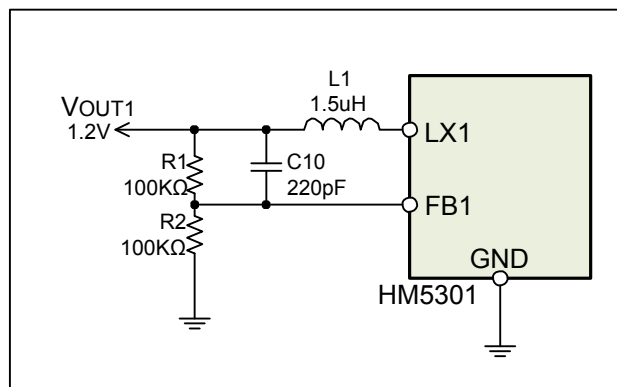

The following table lists common output voltage and the corresponding R1, R2 resistance value for reference

| Output Voltage | R1 Resistance | R2 Resistance | Tolerance |
|----------------|---------------|---------------|-----------|
| 3.3V | 510KΩ | 110KΩ | 1% |
| 1.8V | 200KΩ | 100KΩ | 1% |
| 1.5V | 150KΩ | 100KΩ | 1% |
| 1.2V | 100KΩ | 100KΩ | 1% |

Input / Output Capacitors Selection

The input capacitors are used to suppress the noise amplitude of the input voltage and provide a stable and clean DC input to the device. Because the ceramic capacitor has low ESR characteristic, so it is suitable for input capacitor use. It is recommended to use X5R or X7R MLCC capacitors in order to have better temperature performance and smaller capacitance tolerance. In order to suppress the output voltage ripple, the MLCC capacitor is also the best choice. The suggested part numbers of input / output capacitors are as follows:

| Vendor | Part Number | Capacitance | Edc | Parameter | Size |
|--------|----------------|-------------|-----|-----------|------|
| TDK | C2012X5R1A106M | 10uF | 10V | X5R | 0805 |
| TDK | C3216X5R1A106M | 10uF | 10V | X5R | 1206 |
| TDK | C2012X5R1A226M | 22uF | 10V | X5R | 0805 |
| TDK | C3216X5R1A226M | 22uF | 10V | X5R | 1206 |

Output Inductor Selection

The output inductor selection mainly depends on the amount of ripple current through the inductor ΔI_L . Large ΔI_L will cause larger output voltage ripple and loss, but the user can use a smaller inductor to save cost and space. On the contrary, the larger inductance can get smaller ΔI_L and

3CH Power Management IC

Datasheet

thus the smaller output voltage ripple and loss. But it will increase the space and the cost. The inductor value can be calculated as:

$$L = \frac{V_{PWR} - V_{OUT}}{\Delta I_{SW}} \times \frac{V_{OUT}}{V_{PWR}}$$

For most applications, 1.0uH to 2.2uH inductors are suitable for HM5301.

Power Dissipation

The total output power dissipation of HM5301 should not to exceed the maximum 6W range. The total output power dissipation can be calculated as:

$$P_{D(total)} = V_{OUT1} \times I_{OUT1} + V_{OUT2} \times I_{OUT2} + V_{OUT3} \times I_{OUT3}$$


PCB Layout Recommendations

Layout is very critical for PMIC designs. For HM5301 PCB layout considerations, please refer to the following suggestions to get best performance.


- ▶ It is suggested to use 4-layer PCB layout and place LX plane and output plane on the top layer, place VIN plane in the inner layer.
- ▶ The top layer SMD input and output capacitors ground plane should be connected to the internal ground layer and bottom ground plane individually by using vias.
- ▶ The AGND should be connected to inner ground layer directly by using via.
- ▶ High current path traces need to be widened.
- ▶ Place the input capacitors as close as possible to the VINx pin to reduce noise interference.
- ▶ Keep the feedback path (from V_{OUTX} to FBx) away from the noise node (ex. LXx). LXx is a high current noise node. Complete the layout by using short and wide traces.
- ▶ The top layer exposed pad ground plane should be connected to the internal ground layer and bottom ground plane by using a number of vias to improve thermal performance.
- ▶ Place the input capacitors as close as possible to the VINx pin to reduce noise interference.

Package Information


QFN 3mm x 3mm-20 Package




Top View

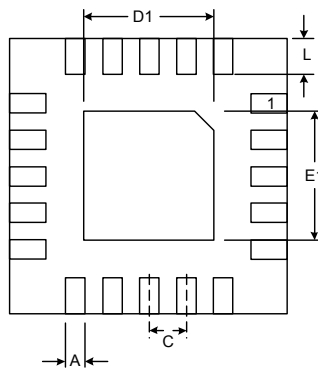

Bottom View



Recommended Layout Pattern



Side View

Unit: mm

| Symbol | Dimension | | Symbol | Dimension Typ |
|--------|-----------|------|--------|---------------|
| | Min | Max | | |
| A | 0.15 | 0.25 | M | 1.50 |
| C | 0.35 | 0.45 | N | 1.50 |
| D | 2.90 | 3.10 | O | 0.30 |
| E | 2.90 | 3.10 | P | 0.80 |
| D1 | 1.55 | 1.75 | Q | 0.40 |
| E1 | 1.55 | 1.75 | R | 3.90 |
| L | 0.35 | 0.45 | S | 3.90 |
| H | 0.70 | 0.80 | | |
| H1 | 0.18 | 0.25 | | |
| H2 | 0.00 | 0.05 | | |