

<A' , \$\$H


BOOST CONVERT CONTROL IC

GENERAL DESCRIPTION


The <A' , \$\$H is a boost topology switching regulator control IC for battery-used applications field. The HM3800T includes a totem-pole single output stage for driving NPN transistor or N-MOS, high precision reference (0.5V) for comparing output voltage with feedback amplifier, an internal dead-time control for controlling the minimum duty cycle, programmable soft start with short circuit protection function and logic level control for operating mode or standby mode.

FEATURES


- Wide supply voltage operating range: 1.8 to 15V
- Reference voltage precision: 4%
- Low current consumption: Operation Mode 5.5mA
Standby-by Mode 1 μ A
- High speed oscillator frequency: 1MHz max.
- Programmable Soft Start function (SS)
- Short Circuit Protection function(SCP)
- Totem-pole output with adjustable on/off current
(for NPN transistors or n-channel MOSFET)
- Logic level control stand-by mode function
- Package: SOP8/TSSOP8/MSOP8

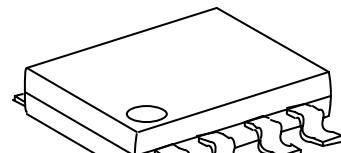

SOP8



TSSOP8




MSOP8

TYPICAL APPLICATION

- Digital Camera
- PDA
- Portable Equipment


<A' , \$\$H

FUNCTIONAL BLOCK DIAGRAM

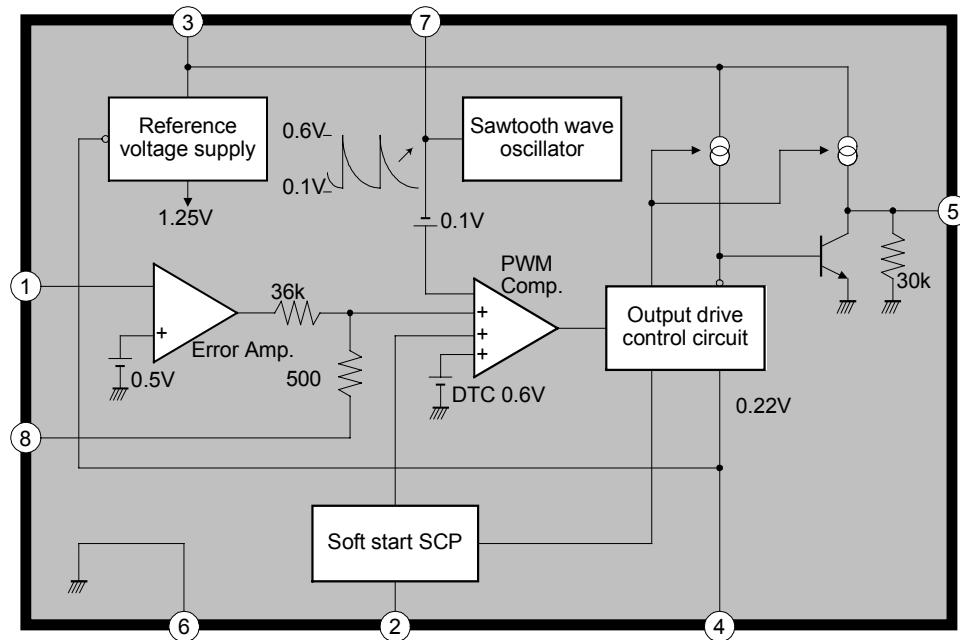

PIN DESCRIPTION

MARK VIEW

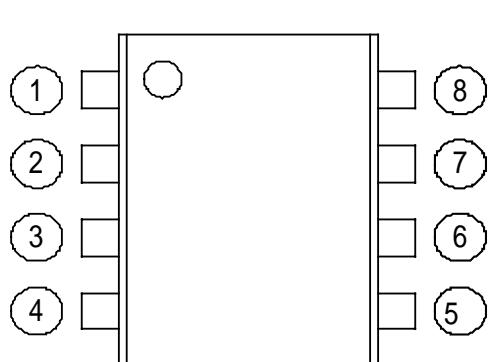


Name	No.	I/O	Description
FB	1	I	Error amplifier inverting input pin
SCP	2	I	Connected a capacitor Soft start and SCP function pin
V _{cc}	3	P	IC power supply
BR/CTL	4	I	Output current setting and control pin
OUT	5	O	Totem-pole output
GND	6	P	IC ground
OSC	7	I	Capacitor and resistor connected for the frequency of oscillation
COMP	8	O	Error amplifier compensation output

<A' , \$\$H

ORDER INFORMATION

Part Number	Operating Temperature	Package	Description
HM3800S-LF	-10°C ~ +85°C	SOP8	Tube
HM3800SR-LF	-10°C ~ +85°C	SOP8	Tape & Reel
HM3800T-LF	-10°C ~ +85°C	TSSOP8	Tube
HM3800TR-LF	-10°C ~ +85°C	TSSOP8	Tape & Reel
HM3800M-LF	-10°C ~ +85°C	MSOP8	Tube
HM3800MR-LF	-10°C ~ +85°C	MSOP8	Tape & Reel

IC DATE CODE DISTINGUISH

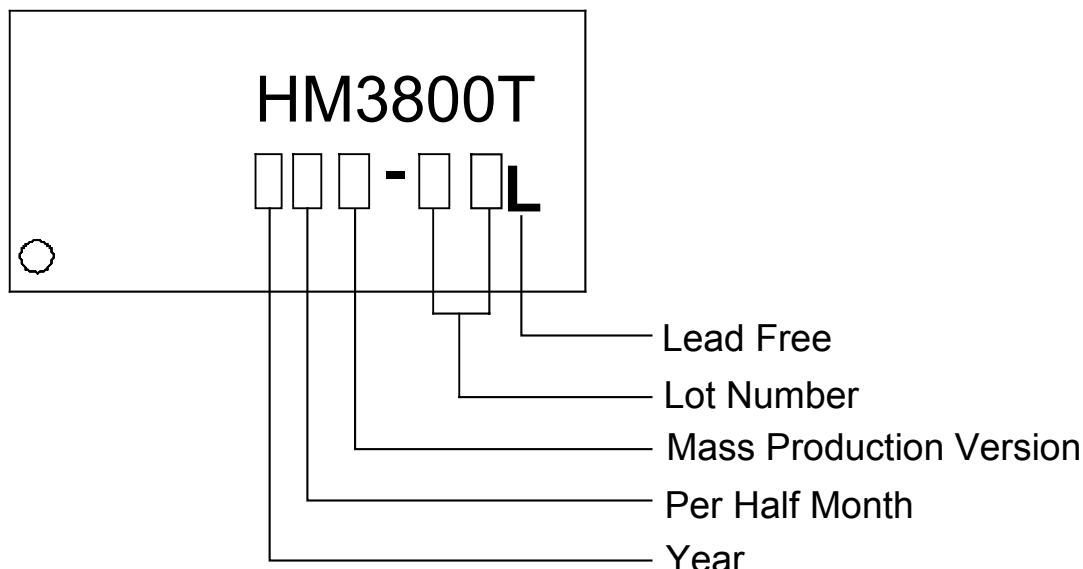

FOR EXAMPLE:

- | | |
|----------|---|
| January | A (Front Half Month), B (Last Half Month) |
| February | C, D |
| March | E, F -----And so on |

Lot Number is the last two numbers

<A' , \$\$H

ABSOLUTE MAXIMUM RATINGS

Power supply voltage----- +15V

Output source current----- -50mA

Output sink current----- +50mA

Allowable dissipation

SOP8 Ta +25 ----- 570mW

MSOP8 Ta +25 ----- 400mW

TSSOP8 Ta +25 ----- 400mW


Operating temperature----- -10 +85

Storage temperature----- -55 +125

SOP8 Lead Temperature (soldering, 10 sec) -----+260

TSSOP8 Lead Temperature (soldering, 10 sec) -----+260

MSOP8 Lead Temperature (soldering, 10 sec) -----+260

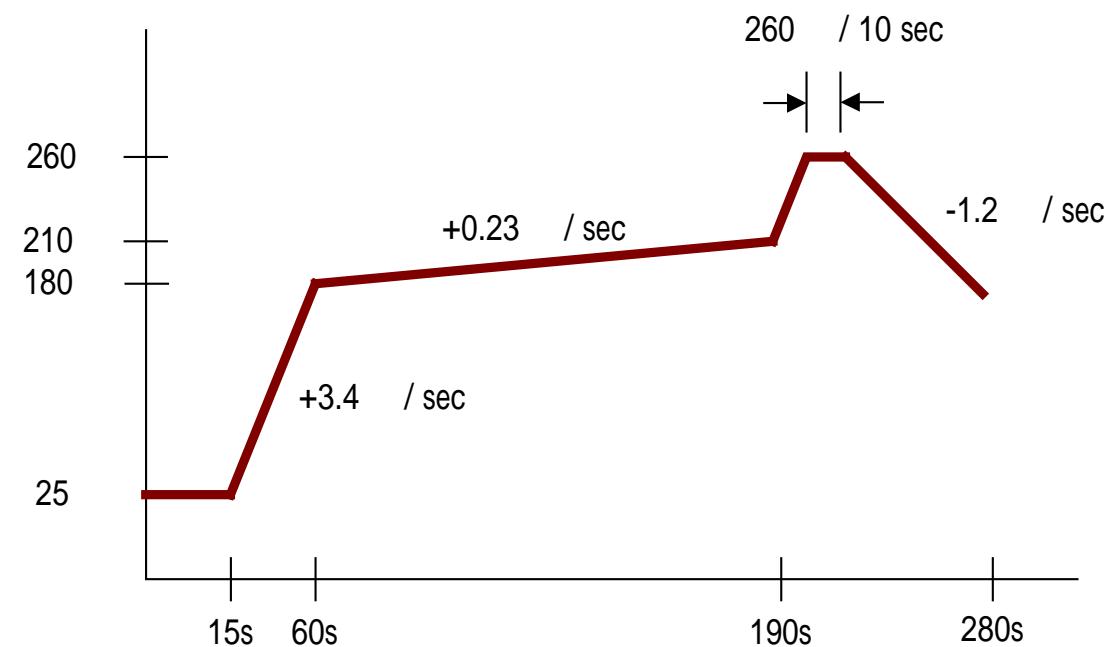

< A' , \$\$H

DC ELECTRICAL CHARACTERISTICS

V_{CC}=2V, T_A=25

Under Voltage Lock-Out section (U.V.L.O.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Low threshold voltage	V _{LOW}	--	-	-	0.9	V
Upper threshold voltage	V _{UPPER}	--	1.1	1.3	1.5	V

Soft Start section (S.S.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input source current	I _{SS}	V _{SCP} = 0V	-1.5	-1.0	-0.7	μA
Soft start threshold voltage	V _{SST}	--	0.8	0.9	1.0	V

Short Circuit Protection section (S.C.P.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input source current	I _{SCP}	V _{SCP} = 0V	-1.5	-1.0	-0.7	μA
S.C.P. threshold voltage	V _{SCP}	--	0.7	0.8	0.9	V

Oscillator section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Oscillation frequency	f	R _T =3.0KΩ, C _T =270pF	400	500	600	KHz
Frequency change with voltage	Δf / ΔV	V _{CC} =2V to 15V	-	2	10	%
Frequency change with temperature	Δf / ΔT	T _a = 0 to 85	-	5	-	%

Idle Period Adjustment section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Maximum duty cycle	T _{DUTY}	R _T =3.0kΩ, C _T =270pF, V _{FB} =0.8V	-	92	98	%

Total device section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Stand-by current	I _{STANDBY}	Pin4 is open or V _{CC}	-	-	1	μA
Average supply current	I _{AVE}	R _B =390Ω, V _{CC} =0~15V	-	5.0	10	mA

< A' , \$\$H

DC ELECTRICAL CHARACTERISTICS (Cont.)

Error Amplifier section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input threshold voltage	V_{FB}	$V_{COMP}=450mV$	480	500	520	mV
V_T change with voltage	$\Delta V_{FB} / \Delta V$	$V_{CC}=2V$ to $15V$	-	5	20	mV
V_T change with temperature	$\Delta V_{FB} / \Delta T$	$T_a = -10$ to 85	-	1	-	%
Input bias current	I_B	--	-1.0	-0.2	1.0	μA
Voltage Gain	A_V	--	-	100	-	V/V
Frequency bandwidth	BW	$A_v=0$ dB	-	6	-	MHz
Output voltage	Positive	V_{POS}	--	0.78	0.87	V
Swing	Negative	V_{NEG}	--	-	0.05	0.2
Output source current	I_{SOURCE}	$V_{COMP}=450mV$	-	-40	-24	μA
Output sink current	I_{SINK}		24	40	-	μA

Output section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output high voltage	V_{OH1}	$R_B=390\Omega$, $I_O=-15mA$	1.0	1.2	-	V
Output high voltage	V_{OH2}	$R_B=750\Omega$, $I_O=-10mA$, $V_{CC}= 1.8V$	0.8	1.0	-	V
Output saturation voltage	V_{OL1}	$R_B=390\Omega$, $I_O=15mA$	-	0.1	0.2	V
Output saturation voltage	V_{OL2}	$R_B=750\Omega$, $I_O=10mA$, $V_{CC}= 1.8V$	-	0.1	0.2	V
Output source current	$I_{OSOURCE}$	$R_B=390\Omega$, $V_o=0.9V$	-	-40	-20	mA
Output sink current	I_{OSINK}	$R_B=390\Omega$, $V_o=0.3V$	30	40	-	mA
Internal pull-down resistor	R_O	--	20	30	40	k Ω

Output Current Setting / Control section

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Pin voltage	V_{BR}	$R_B=390\Omega$	0.15	0.22	0.3	V
Input off condition	I_{OFF}	--	-20	-	0	μA
Input on condition	I_{ON}	--	-	-	-45	μA
Pin current range	I_{BR}	--	-1.8	-	-0.1	mA

<A' , \$\$H

TYPICAL CHARACTERISTICS

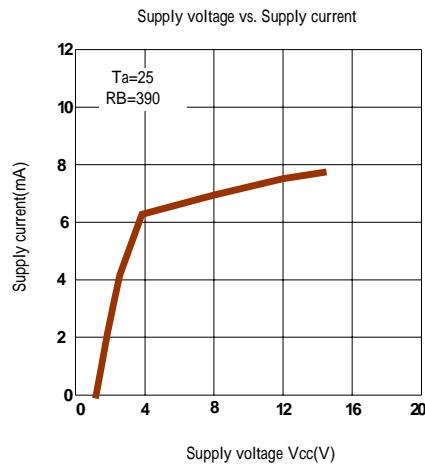


Figure 1

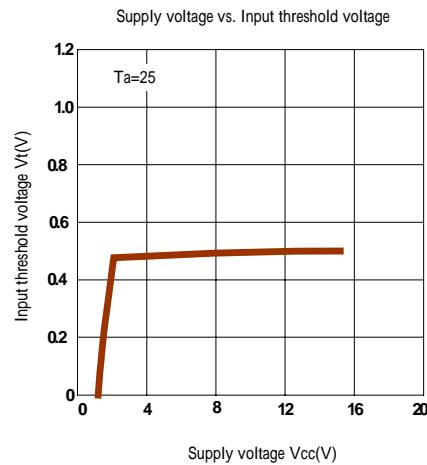


Figure 2

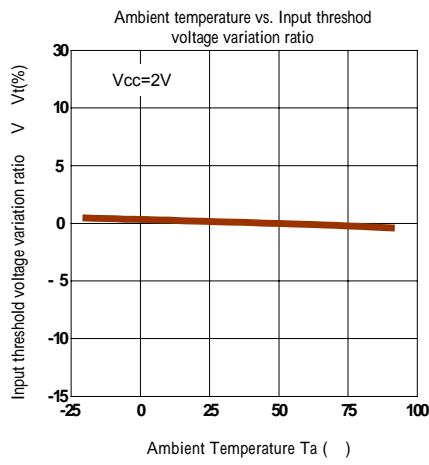


Figure 3

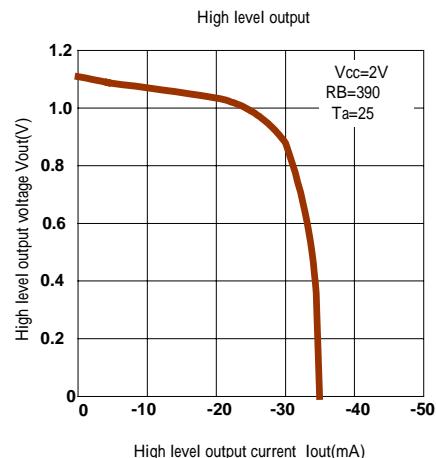


Figure 4

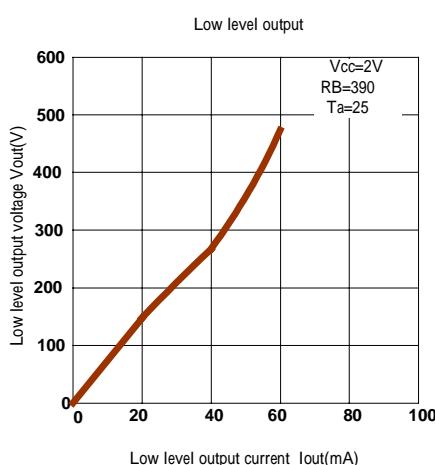


Figure 5

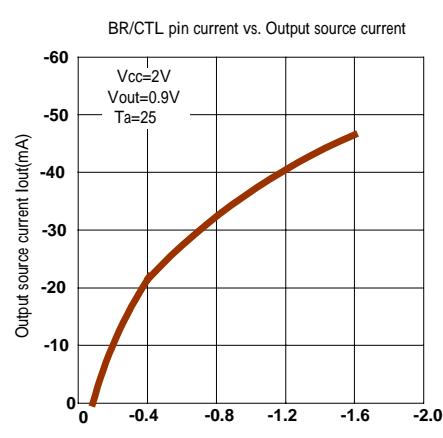


Figure 6

<A' , \$\$H

TYPICAL CHARACTERISTICS (Cont.)

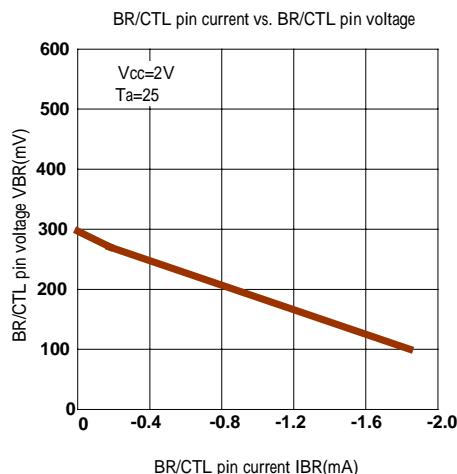


Figure 7


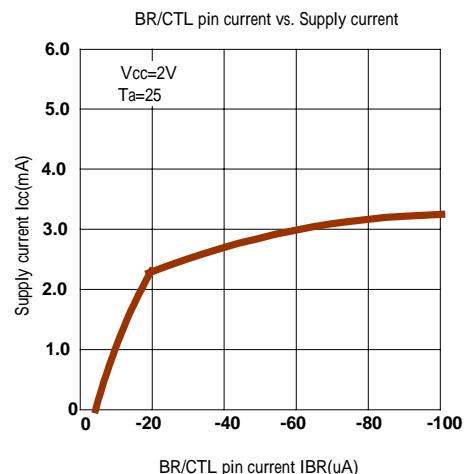


Figure 8

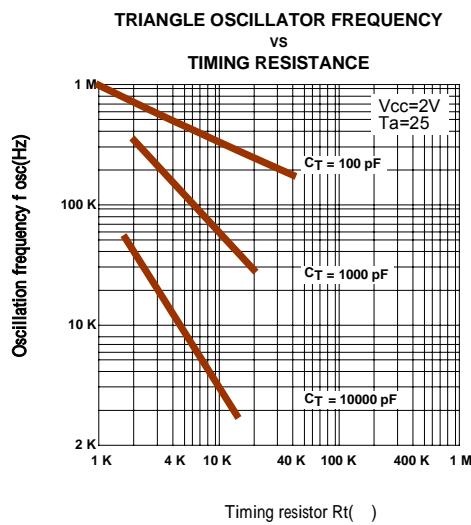

Timing resistor R_t()

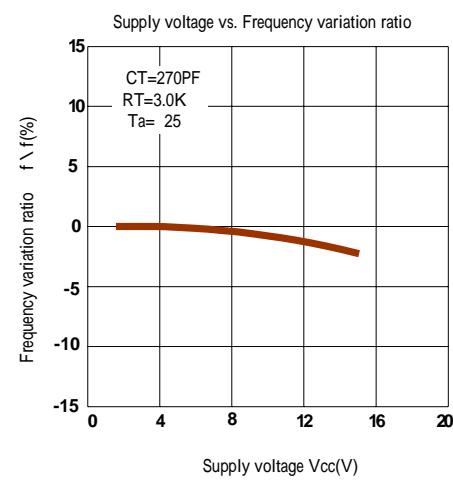


Figure 10

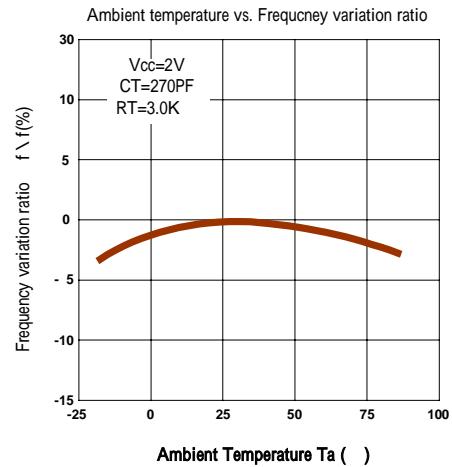


Figure 11

DETAILED DESCRIPTION

Voltage reference

A 1.25V regulator operating from VCC is used to power the internal circuitry of the **<A' , \$\$H**. An internal resistive divider provides 0.5V reference for the error amplifier, Soft-start (typ. 0.9V) and SCP (typ. 0.8V) circuits.

Error amplifier

The error amplifier compares a sample of the dc-dc converter output voltage to the 0.5V reference and generates an error signal for the PWM comparator. Output voltage of dc-dc converter is setting with the resistor divider using the following expression (see fig12):

$$V_{out} = \left(1 + \frac{R1}{R2}\right) * 0.5$$

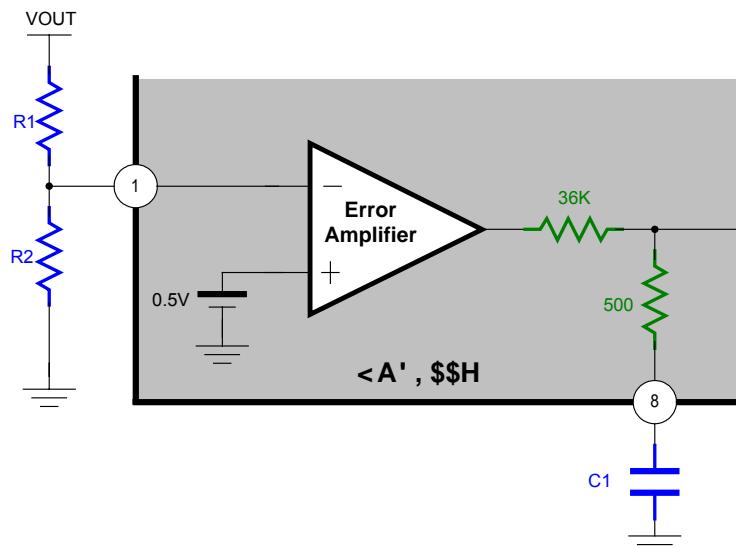


Figure 12. Error Amplifier with Feedback resistance divider

Oscillator

The oscillator frequency can be set between 20KHz and 500KHz by connecting a resistor and a capacitor at OSC pin of **<A' , \$\$H** to ground. The oscillator frequency can be determined by using the graph shown in Figure 9.

The oscillator output is a sawtooth wave with a minimum value of approximately 0.1V and a maximum value of approximately 0.6V. The PWM comparator compares the oscillator voltage with error amplifier output voltage; internal DTC voltage (typ. 0.6V) and soft start setting voltage. When the sawtooth wave voltage is low than above three-output voltage, the output of **<A' , \$\$H** is high (Turn on NPN transistor or NMOS).

<A' , \$\$H

Under voltage lockout (UVLO)

The under voltage lockout circuits turn the output off and whenever the supply voltage drops too low (approximately 0.9V at 25°C) for proper operation. A hysteresis voltage of 200mV eliminates false triggering on noise and chattering.

Soft Start/ Short-circuit protection (S.S. / S.C.P.)

The soft start is functional after power on, and the interval of soft start time is determined by a capacitor connected to SCP pin (pin 2). When soft start function finished, the internal soft start voltage is setting high, but external SCP pin is setting low in order to change to short circuit detection / protection function.

The time of soft start is following expression:

$$T_{ss} = 0.35 * C [\mu F]$$

The short circuit protection is functional due to a heavy loading drop and output of error amplifier (COMP pin) is maintain a V_{POS} (typ. 0.87V), the capacitor is charged until SCP threshold voltage (typ. 0.8V), then **<A' , \$\$H** output is disable (internal pull-low) and the capacitor is discharged to low.

The time of short circuit protection is following expression:

$$T_{scp} = 0.8 * C [\mu F]$$

<A' , \$\$H

Output transistor

The **<A' , \$\$H** has a totem-pole transistor with a 40mA source/sink current rating to drive an external NPN transistor or NMOS directly. The driving current capability depends on a resistor R that is connected to BR/CTL pin (Pin4) of **<A' , \$\$H**. (see fig. 14)

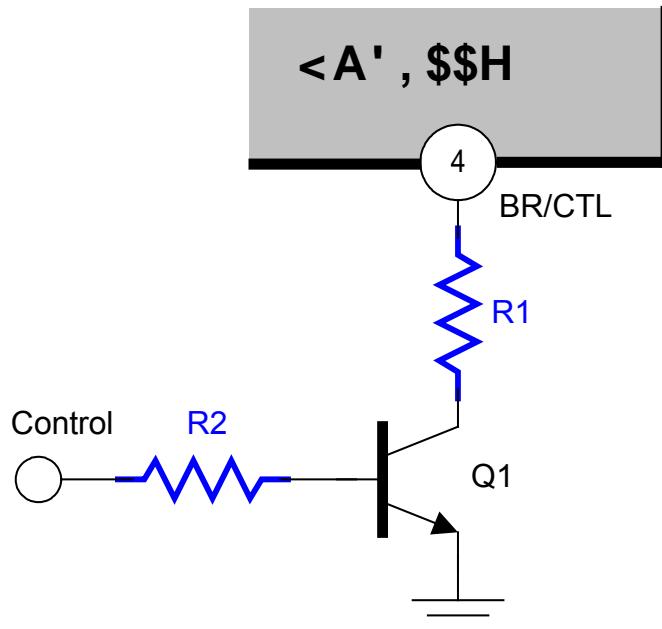


Figure 13. Output transistor driving control circuit

BR/CTL pin can also use to control the output of **<A' , \$\$H** for disable or enable function of system.

Control Pin	Q1	BR/CTL Pin	Output Transistor Function	Mode
Low	Off	Open	Disable	Stand-by
High	On	Bias Current	Enable	Operation

APPLICATION NOTE (1)

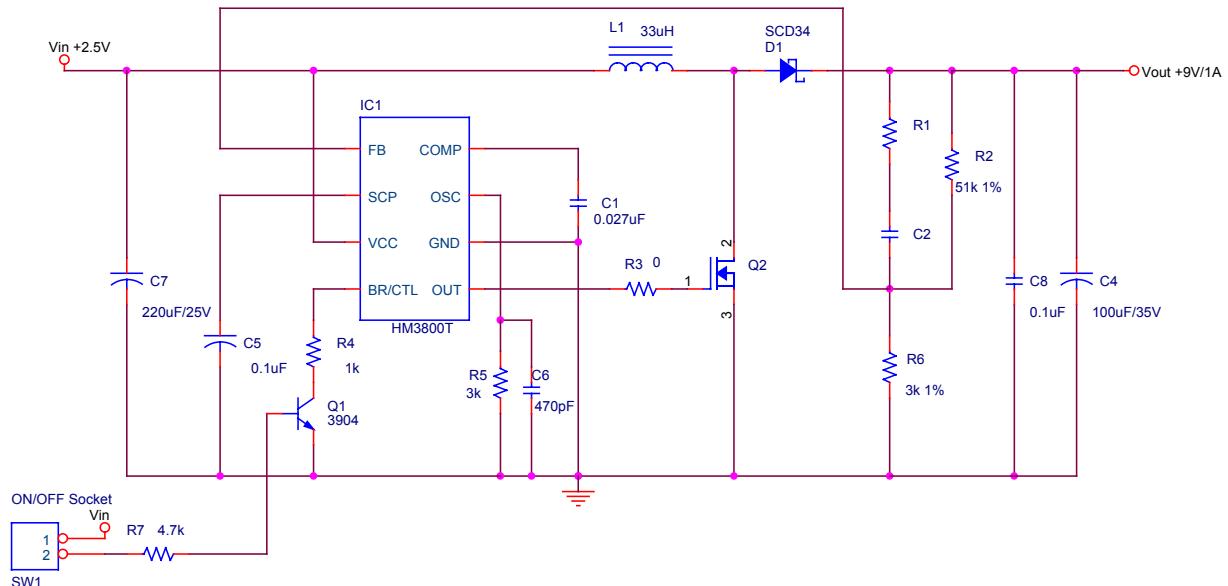


Figure 14. DC12V to DC24V Boost Regulator

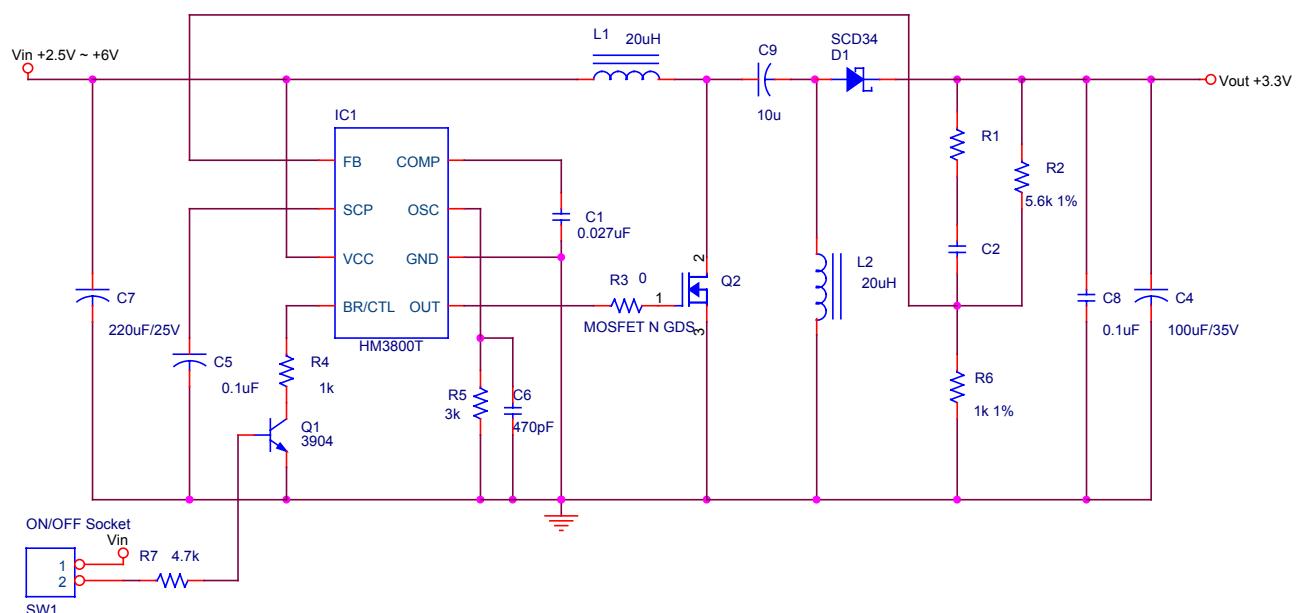


Figure 15. DC2.5V~DC6V to DC3.3V SEPIC Regulator

<A' , \$\$H

APPLICATION NOTE (2)

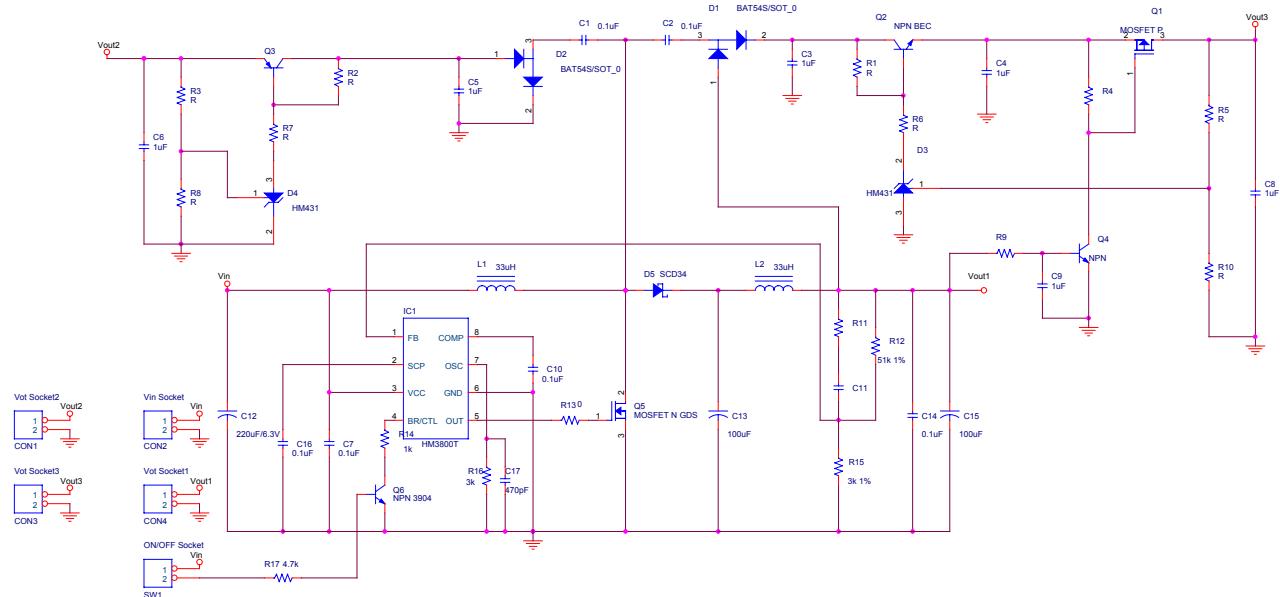


Figure 16. Charge Pump DC-DC Converter Circuits

APPLICATION NOTE (3)

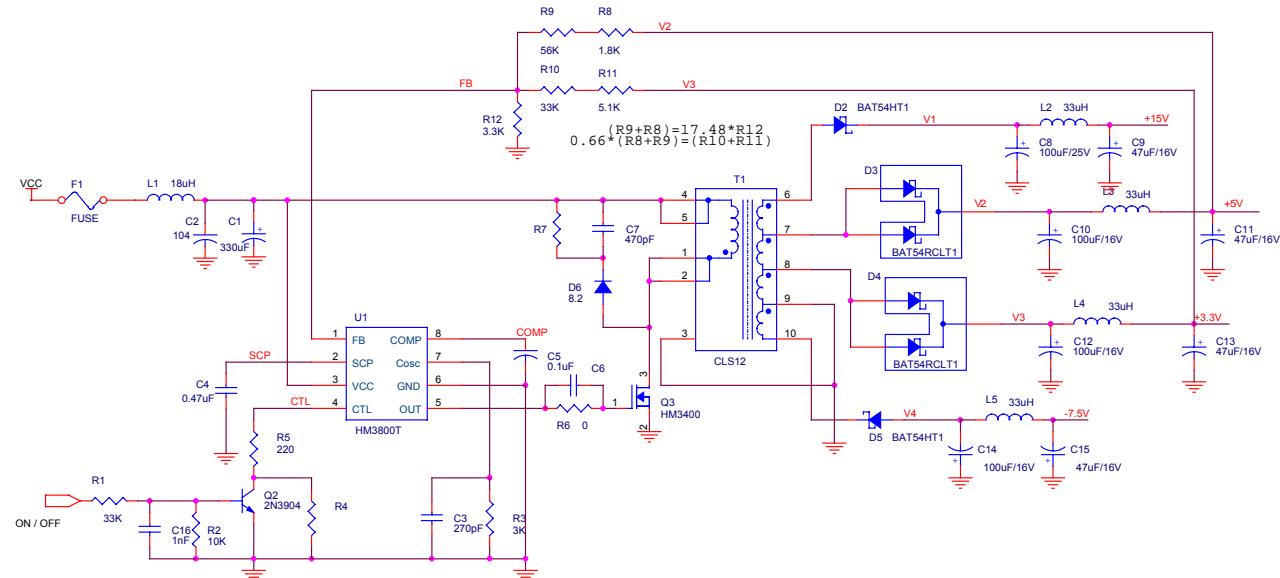


Figure 17. Flyback Multi-output DC-DC Converter Circuits

TIMING WAVEFORM


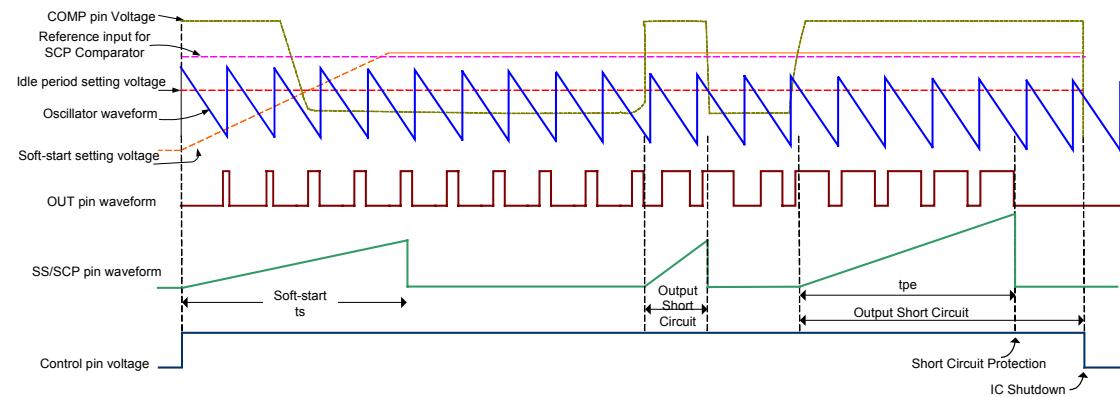


Figure 18. <A' , \$\$H Timing Diagram

<A' , \$\$H

**PACKAGE OUTLINE
SOP8**

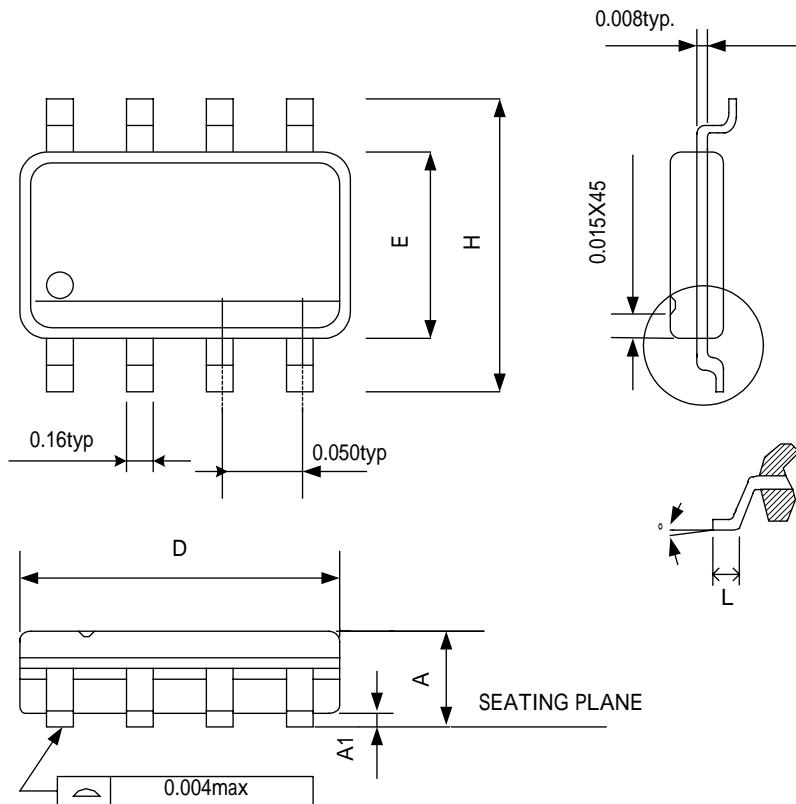


SYMBOLS	MIN	MAX
A	0.053	0.069
A1	0.004	0.010
D	0.189	0.196
E	0.150	0.157
H	0.228	0.244
L	0.016	0.050
°	0	8

NOTE:

1. JEDEC OUTLINE:MS-012 AA
2. DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED .15mm (.06in) PER SIDE
3. DIMENSIONS "E" DOES NOT INCLUDE INTER-LEAD FLASH,OR PROTRUSIONS. INTER-LEAD FLASH AND PROTRUSIONS SHALL NOT EXCEED .25mm (.10in) PER SIDE.

< A' , \$\$H

MSOP8

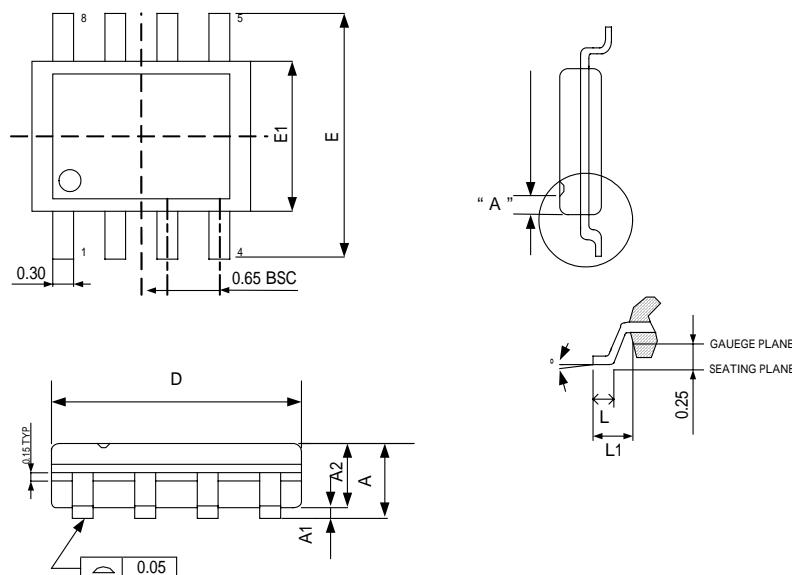


SYMBOLS	MIN	MAX
A	-	1.10
A1	0.00	0.15
A2	0.75	0.95
D	3.00 BSC	
E	4.90 BSC	
E1	3.00 BSC	
L	0.40	0.80
L1	0.95 REF	
°	0	8

NOTE:

- 1.JEDEC OUTLINE:MO-187 AA
- 2.DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS AND GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE
- 3.DIMENSIONS "E1" DOES NOT INCLUDE INTERLEAD FLASH,OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.25 PER SIDE.
- 4.DIMENSIONS "0.22" DOES NOT INCLUDE DAMBAR PROTRUSIONS.ALLOWABLE DAMBAR PROTRUSIONS SHALL BE 0.08 MM TOTAL IN EXCESS OF THE '0.22' DIMENSION AT MAXIMUM MATERIAL CONDITION.DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.MINIMUM SPAC BETWEEN PROTRUSION AND ADJACENT LEAD IS 0.07MM.
- 5.DIMENSIONS "D" AND 'E1' TO BE DETERMINED AT DATUM PLANE H

< A' , \$\$H

TSSOP8

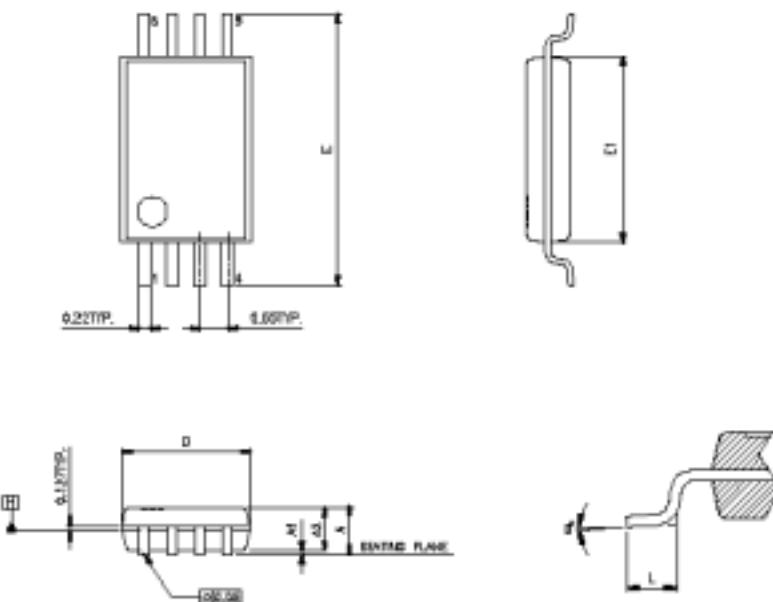

SYMBOLS	MIN	NOR	MAX
A	-	-	1.20
A1	0.05	-	0.15
A2	0.96	1.01	1.06
D	2.90	3.00	3.10
E	6.40 BSC		
E1	4.30	4.40	4.50
L	0.45	0.60	0.75
°	0	-	8

NOTE:


- 1.JEDEC OUTLINE:MO-187 AA
- 2.DIMENSIONS "D" DOES NOT INCLUDE MOLD FLASH,PROTRUSIONS OR GATE BURRS.MOLD FLASH,PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE
- 3.DIMENSIONS "E1" DOES NOT INCLUDE INTERLEAD FLASH,OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.25 PER SIDE.
- 4.DIMENSIONS "0.22" DOES NOT INCLUDE DAMBAR PROTRUSIONS.ALLOWABLE DAMBAR PROTRUSIONS SHALL BE 0.08 MM TOTAL IN EXCESS OF THE '0.22' DIMENSION AT MAXIMUM MATERIAL CONDITION.DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.MINIMIM SPAC BETWEEN PROTRUSION AND ADJACENT LEAD IS 0.07MM.
- 5.DIMENSIONS "D" AND 'E1' TO BE DETERMINED AT DATUM PLANE H

<A' , \$\$H


PACKING SPECIFICATIONS

BOX DIMENSION

TUBE INSIDE BOX AND CARTON

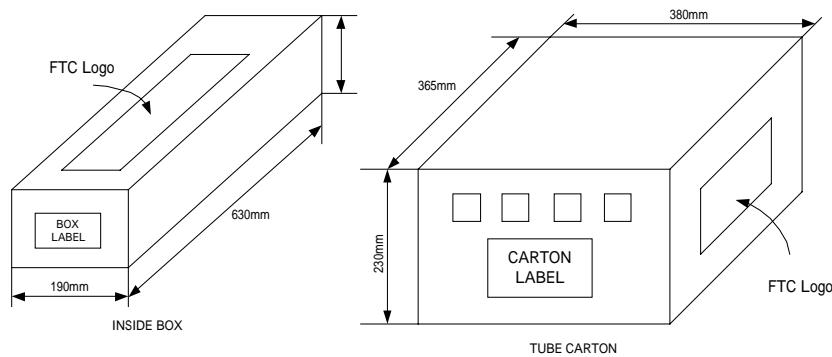

TAPE AND REEL INSIDE BOX AND CARTON

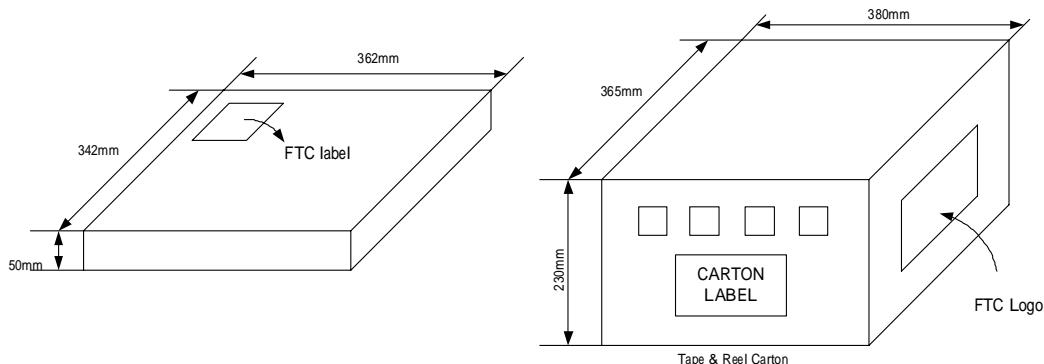


PACKING QUANTITY SPECIFICATIONS

SOP 8	MSOP8	TSSOP8	SOP 8	MSOP8	TSSOP8
100 EA/TUBE	80 EA/TUBE	160 EA/TUBE	2500 EA / REEL		
100 TUBES / INSIDE BOX			4 INSIDE BOXES / CARTON		
4 INSIDE BOXES / CARTON					

LABEL SPECIFICATIONS

Tapping & Reel

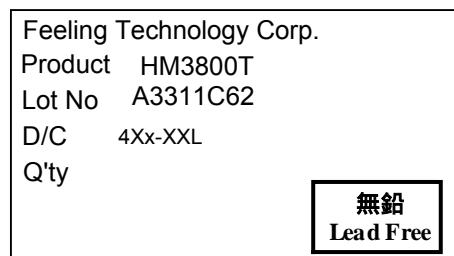

<A' , \$\$H

CARTON



Feeling Technology Corp.	
Product Type:	HM3800T
Lot No:	A3311C62
Date Code:	4Xx-XXL
Package Type:	SOP-8L
Marking Type:	Laser
Total Q'ty:	10,000
無鉛 Lead Free	

CARRIER TAPE DIMENSIONS

SOP8


APPLICATION	W	P	E	F	D	D ₁
SOP8	12.0 ^{+0.3} _{-0.1}	8.0±0.1	1.75±0.1	5.5±0.1	1.55±0.1	1.5 ^{+0.25}

APPLICATION	P _o	P ₁	A _D	B _O	K _O	t
SOP8	4.0±0.1	2.0±0.1	6.4±0.1	5.20±0.1	2.1±0.1	0.30±0.013

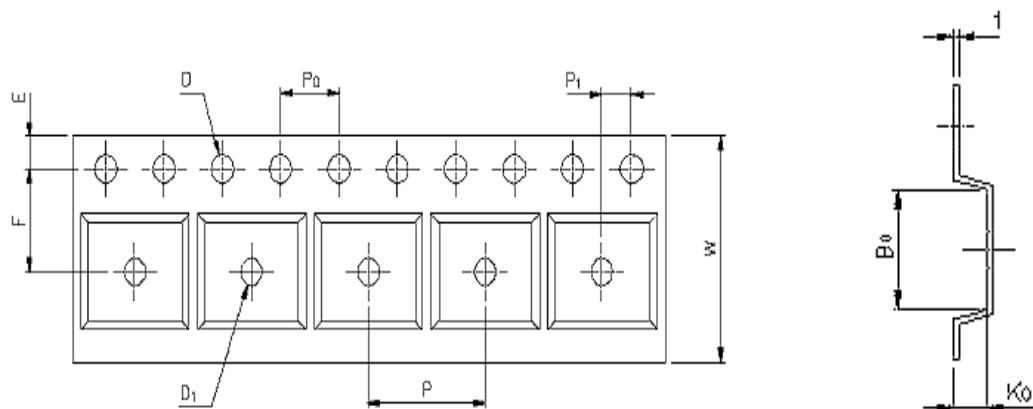

<A' , \$\$H

REEL DIMENISONS

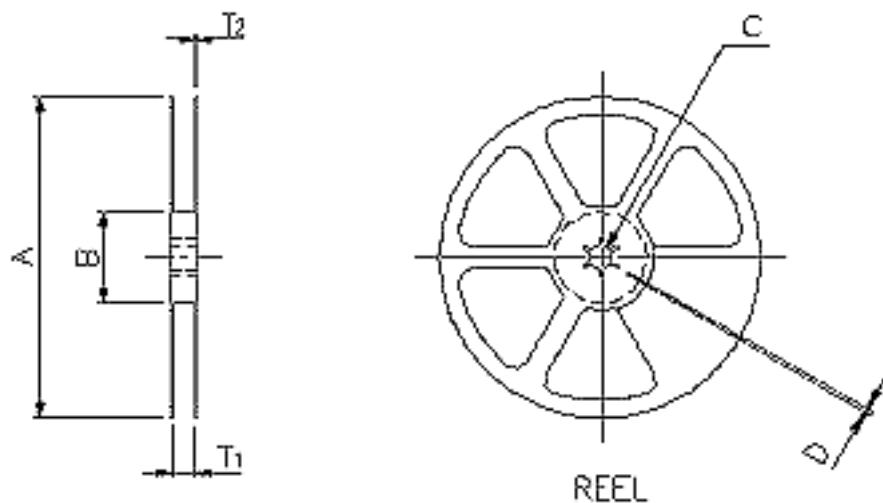



APPLICATION	MATERIAL	A	B	C	D	T ₁	T ₂
SOP8	PLASTIC REEL (WHITE)	330±0.1	62±1.5	12.75±0.15	2+0.6	12.4±0.2	2.0±0.2

<A' , \$\$H

CARRIER TAPE DIMENSIONS
MSOP8

APPLICATION	W	P	E	F	D	D ₁
MSOP8	12.0±3	8.0	1.75±1.0	5.5±0.5	1.5 ^{+0.1}	1.50


APPLICATION	P ₀	P ₁	A _D	B ₀	K ₀	t
MSOP8	4.0±0.1	2.0±0.5	4.20	3.30	1.20	0.30±0.5

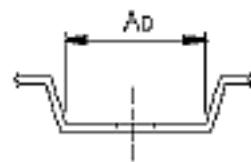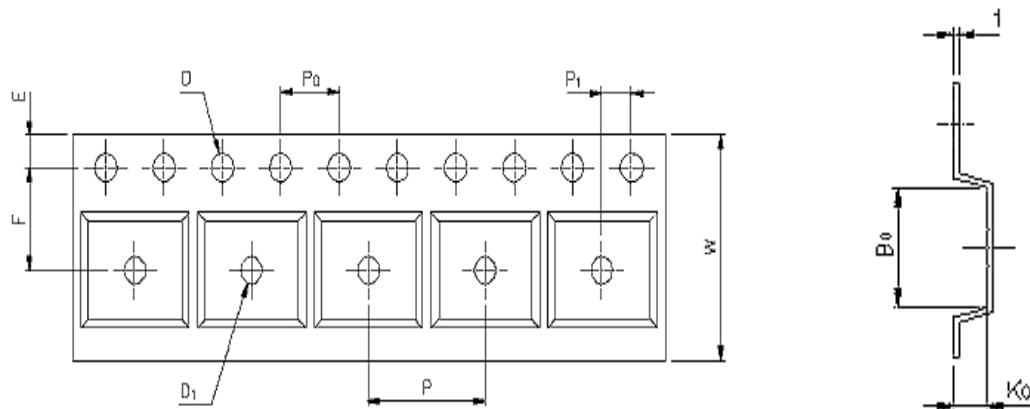

(mm)

<A' , \$\$H

REEL DIMENSIOS

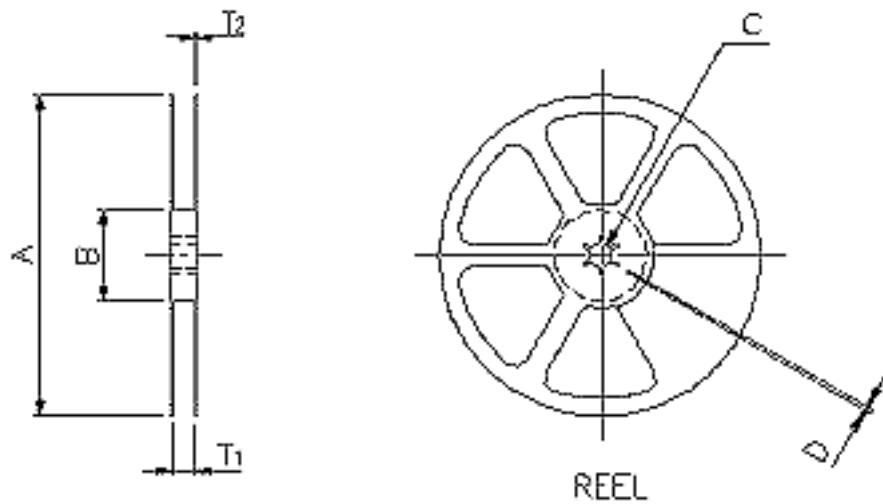

APPLICATION	MATERIAL	A	B	C	D	T ₁	T ₂
MSOP8	PLASTIC REEL (WHITE)	330±1	62±1.5	12.75 ^{+0.15}	2±0.15	12.4 ^{+0.2}	16.8 ^{-0.4}



<A' , \$\$H

CARRIER TAPE DIMENSIONS

TSSOP8

APPLICATION	W	P	E	F	D	D ₁
TSSOP8	12.0±0.3	8.00	1.75±1.0	5.5±0.05	1.5 ^{+0.1}	1.50


APPLICATION	P ₀	P ₁	A _D	B ₀	K ₀	t
TSSOP8	4.00	2.00±0.05	4.20	3.40	1.30	0.30±0.5

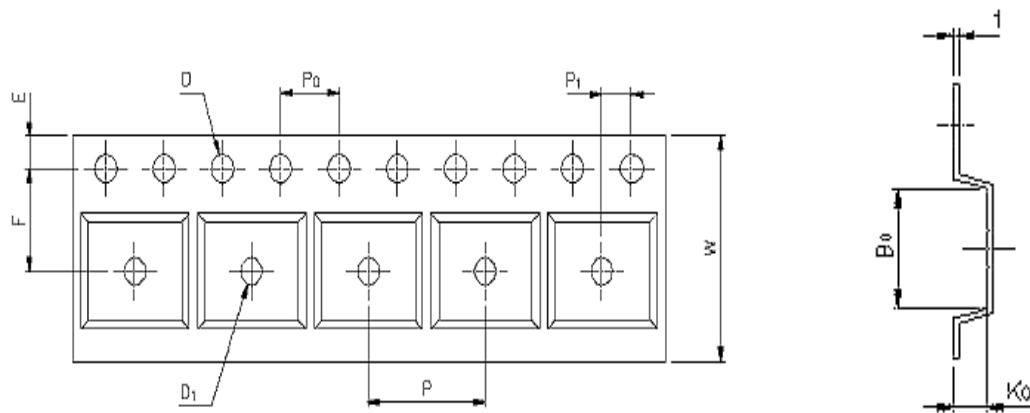

(mm)

<A' , \$\$H

REEL DIMENSIOS

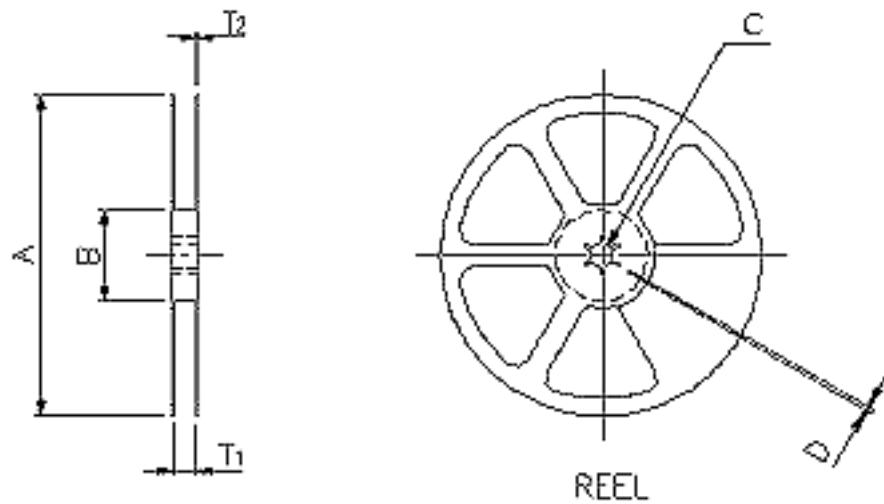

APPLICATION	MATERIAL	A	B	C	D	T ₁
TSSOP8	PLASTIC REEL (WHITE)	330	100	13.0 ^{+0.5}	2±0.5	12.5