

## ■ INTRODUCTION

The HM6213-ADJ are a group of positive voltage regulators manufactured by CMOS technologies with high ripple rejection, ultra low noise, low power consumption and low dropout voltage, which can prolong battery life in portable electronics. The HM6213-ADJ work with low-ESR ceramic capacitors, reducing the amount of board space necessary for power applications. The HM6213-ADJ consume less than 0.1 $\mu$ A in shutdown mode and have fast turn-on time less than 50 $\mu$ s. The series are very suitable for the battery-powered equipments, such as RF applications and other systems requiring a quiet voltage source.

## ■ APPLICATIONS


- RF: VCOs, Receivers, ADCs
- Cellular and Cordless Telephones
- Handheld Organizers

## ■ FEATURES

- 500mA RF Low-Dropout Regulator With Enable
- Ultralow-Noise: 40 $\mu$ V<sub>RMS</sub>(10Hz~100kHz)
- High PSRR: 70dB@1kHz
- Fast Start-Up Time (20 $\mu$ s)
- Excellent Load/Line Transient Response
- Low Dropout Voltage: 110mV@100mA
- Stable With a 1 $\mu$ F Ceramic Capacitor
- Available in Adjustable Voltage Version (0.6V to 5.5V)
- Built-in Current Limiter, Short-Circuit Protection

- Audio
- Bluetooth, Wireless LAN
- Tablet, MID

## ■ BLOCK DIAGRAM

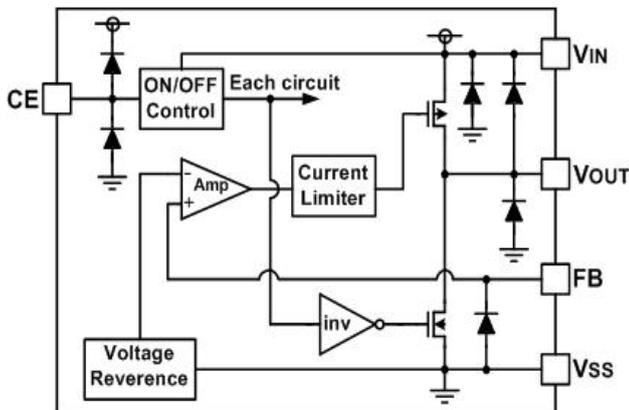


## ■ ORDER INFORMATION

### HM6213-ADJ<sup>①</sup>

DESIGNATOR	DESCRIPTION
ADJ	Adjustable Voltage Version
①	Package: SOT23-5: C
	Package: SOT-353(SC70-5): R

■ PIN CONFIGURATION

SOT23-5  
 SOT-353(SC70-5)



SOT23-5/ SOT-353(SC70-5)

PIN NUMBER		PIN NAME	FUNCTION
SOT23-5	SOT-353(SC70-5)		
1	1	V <sub>IN</sub>	Power input Pin
2	2	V <sub>SS</sub>	Ground
3	3	CE	Chip Enable Pin
4	4	FB	Feedback Pin: Used to Set Output Voltage
5	5	V <sub>OUT</sub>	Output Pin

■ TYPICAL APPLICATION

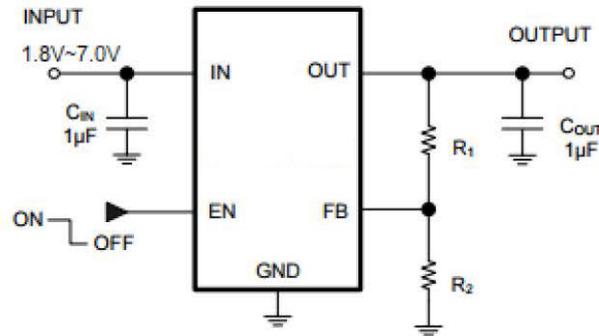


Fig.1 Typical Application Circuit

■ ABSOLUTE MAXIMUM RATINGS

(Unless otherwise specified, T<sub>A</sub>=25°C)

PARAMETER	SYMBOL	RATINGS	UNITS
Input Voltage	V <sub>IN</sub>	V <sub>SS</sub> -0.3~V <sub>SS</sub> +8	V
Output Current	I <sub>OUT</sub>	500	mA
Output Voltage	V <sub>OUT</sub>	V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3	V
Power Dissipation	P <sub>d</sub>	400	mW
	SOT23-5 SOT-353(SC70-5)		
Operating Temperature	T <sub>opr</sub>	-40~+85	°C
Storage Temperature	T <sub>stg</sub>	-40~+125	°C
Soldering Temperature & Time	T <sub>solder</sub>	260°C, 10s	

■ ELECTRICAL CHARACTERISTICS

HM6213-ADJ ( $V_{IN}=V_{OUT}+1V$ ,  $C_{IN}=C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Input Voltage	$V_{IN}$	—	1.8 <sup>(1)</sup>		7.0	V
Output Current	$I_{OUT}$	$V_{OUT} \geq 1.8V$	500			mA
Supply Current	$I_{SS}$	$I_{OUT}=0mA$		45	80	$\mu A$
Standby Current	$I_{STBY}$	$V_{CE}=0V$			0.1	$\mu A$
CE "High" Voltage	$V_{CEH}$		1.2		$V_{IN}$	V
CE "Low" Voltage	$V_{CEL}$				0.3	V
CE pin current		$V_{CE}=0V$	-1		1	V
FB Voltage	$V_{FB}$	$I_{OUT}=1mA$	0.588	0.600	0.612	V
FB pin current		$V_{FB}=1.8V$			1	$\mu A$
Output voltage range			0.6		$5.5 - V_{DO}$	V
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta V_{IN}}$	$I_{OUT} = 10mA$ $V_{OUT} + 1V \leq V_{IN} \leq 7V$		0.01	0.2	%/V
Load Regulation	$\Delta V_{OUT}$	$V_{IN} = V_{OUT} + 1V$ , $1mA \leq I_{OUT} \leq 100mA$		1		mV
Dropout Voltage <sup>(2)</sup>	$V_{dif}$	$I_{OUT} = 100mA$ $V_{OUT} \geq 3.0V$		110		mV
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta T \times V_{OUT}}$	$I_{OUT} = 10mA$ $-40 \leq T \leq +85$		50		ppm
Current Limit	$I_{LIM}$		500			mA
Short Current	$I_{SHORT}$	$V_{OUT} = V_{SS}$		20		mA
Power Supply Ripple Rejection	$V_{OUT} = 1.2V$	PSRR	$f=100Hz, I_{OUT}=50mA$		80	dB
			$f=1kHz, I_{OUT}=50mA$		70	
			$f=10kHz, I_{OUT}=50mA$		50	
Output noise voltage		BW=10Hz to 100kHz, $I_{OUT}=10mA$		40		$\mu V_{RMS}$
Time, start-up		$I_{OUT}=0mA, C_{OUT}=1\mu F$		20		$\mu S$





**NOTE:**

- (1) Minimum  $V_{IN}$  is 1.8V or  $V_{OUT} + V_{DO}$ , whichever is greater.  
 (2)  $V_{dif}$ : The difference of output voltage and input voltage when input voltage is decreased gradually till output voltage equals to 98% of  $V_{OUT}$  (E).





## ■ DROPOUT VOLTAGE CHART

Setting Output Voltage $V_{OUT}(V)$	Dropout Voltage (mV) Typ.			
	$I_{OUT}=100mA$	$I_{OUT}=200mA$	$I_{OUT}=300mA$	$I_{OUT}=500mA$
1.2	372mV	642mV	876mV	1.368V
1.5	248mV	471mV	681mV	1.128V
1.8	189mV	370mV	550mV	947mV
2.1	157mV	311mV	469mV	820mV
2.5	132mV	265mV	400mV	706mV
2.8	120mV	241mV	365mV	645mV
3.0	111mV	229mV	348mV	612mV
3.3	107mV	214mV	325mV	574mV
3.6	101mV	203mV	307mV	542mV
4.0	98mV	184mV	292mV	506Mv
4.5	93mV	183mV	275mV	474mV
5.0	88mV	173mV	261mV	446mV

## ■ TYPICAL PERFORMANCE CHARACTERISTICS

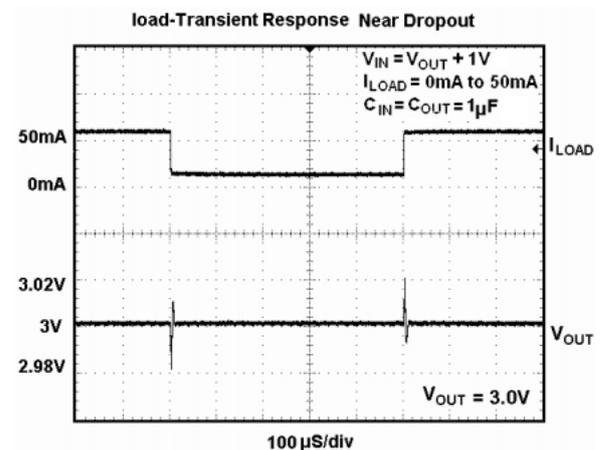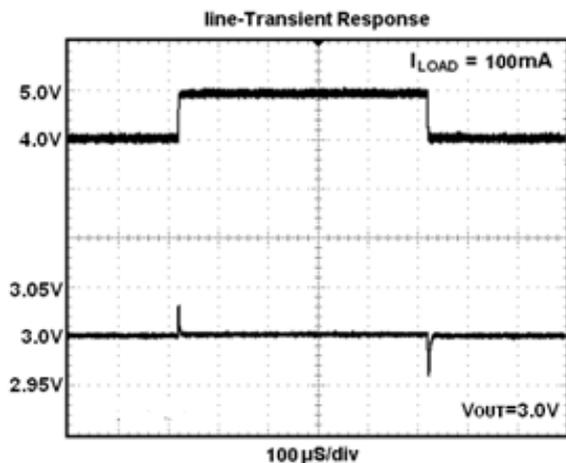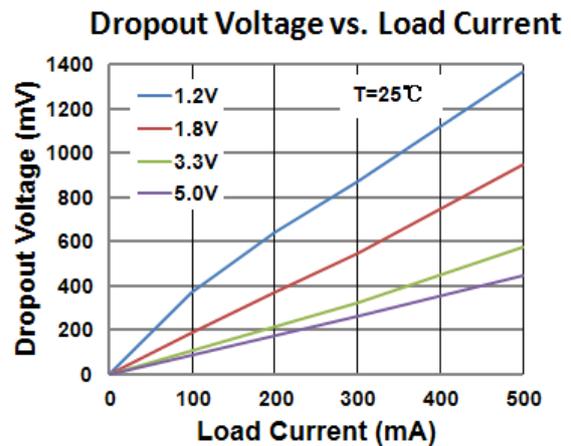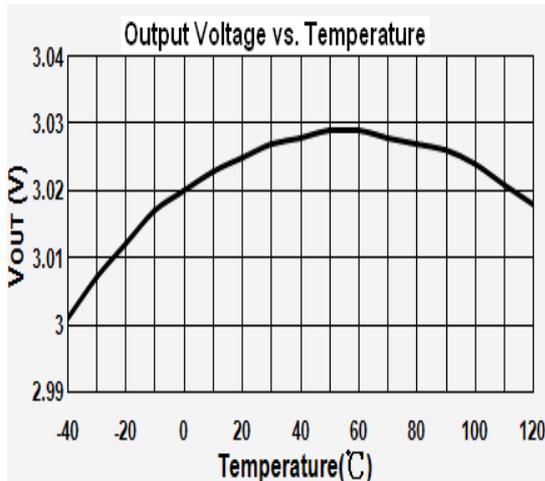

■ TYPICAL PERFORMANCE CHARACTERISTICS(Continued)

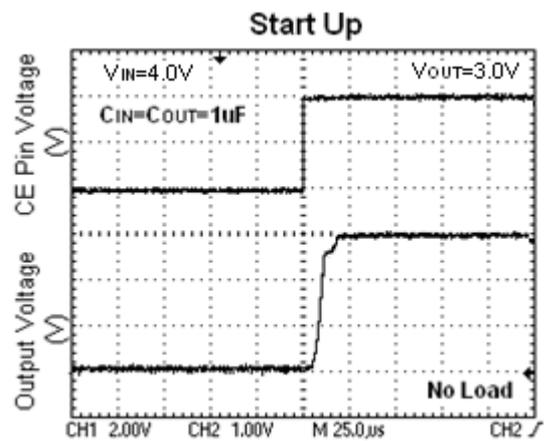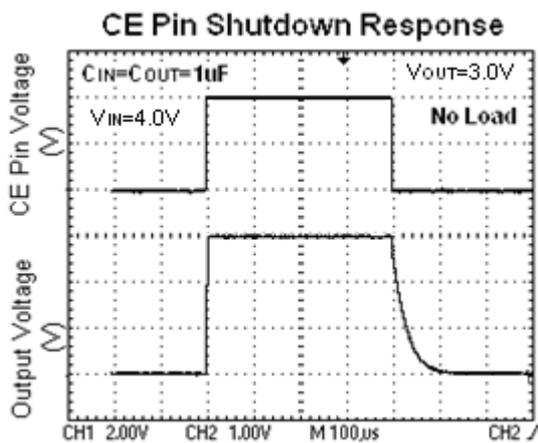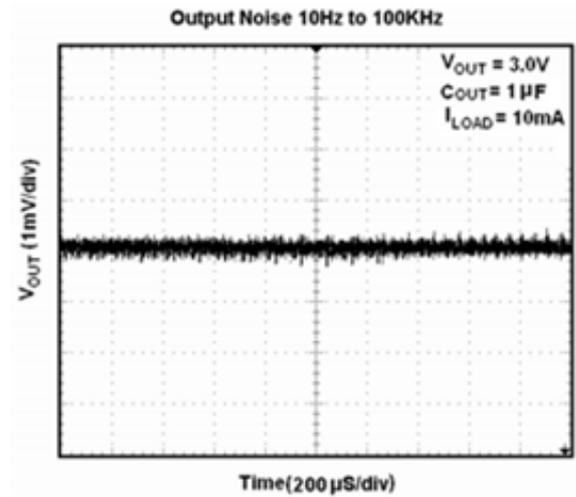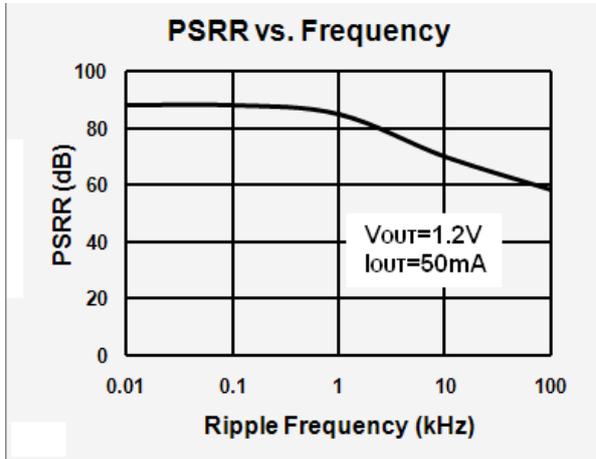

■ APPLICATION INFORMATION

**Setting The Output Voltage**

Figure 1 shows the typical application circuit with HM6213-ADJ. The external resistor sets the output voltage according to the following equation:


$$V_{OUT} = 0.6V \times \left(1 + \frac{R1}{R2}\right)$$

Table 1. Resistor select for output voltage setting

$V_{OUT}$	R1	R2
1.2V	30.1K	30.1K
1.5V	45.3K	30.1K
1.8V	60.4K	30.1K
2.5V	95.3K	30.1k
2.8V	110K	30.1k
3.0V	120K	30.1K
3.3V	137K	30.1K
5.0V	221K	30.1k


■ **PACKAGING INFORMATION**

● **SOT23-5 PACKAGE OUTLINE DIMENSIONS**

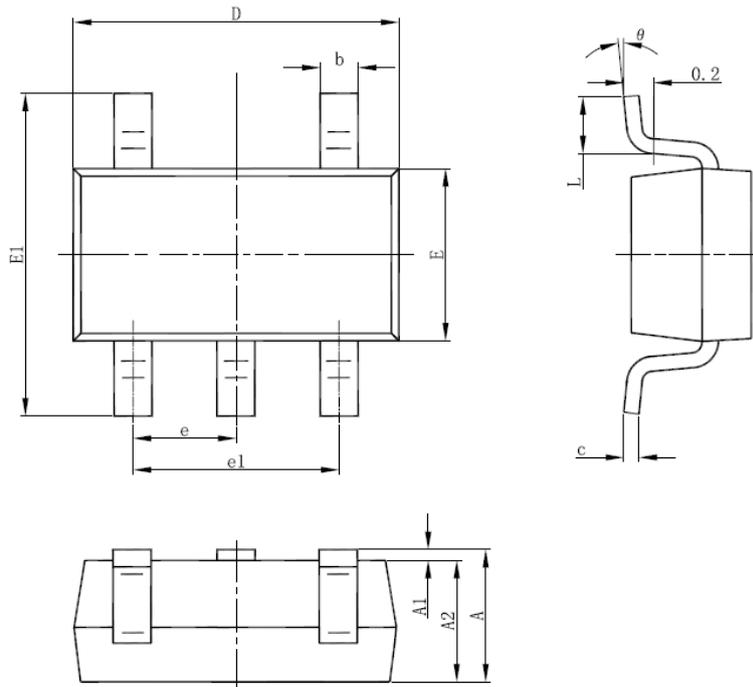

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

• SOT-353 (SC70-5) PACKAGE OUTLINE DIMENSIONS

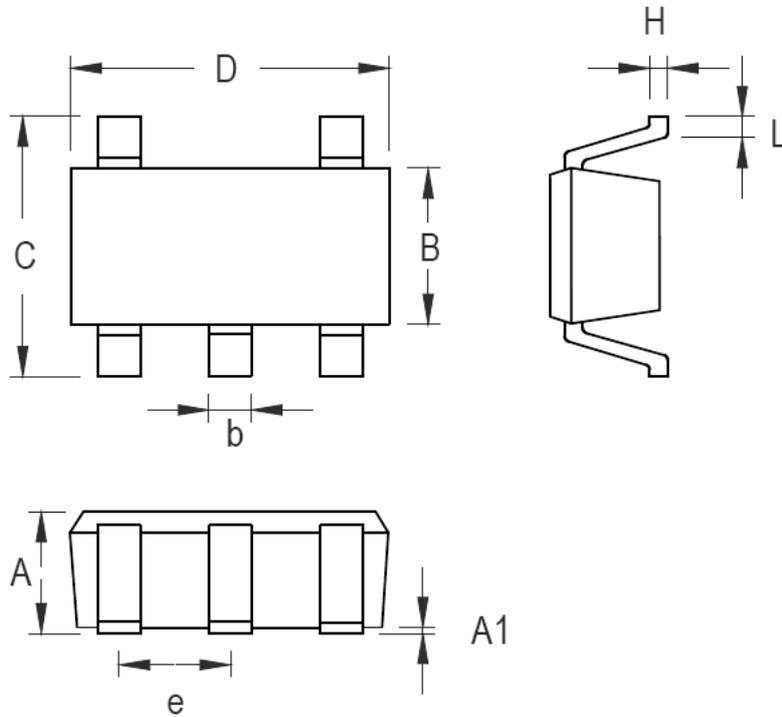

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.100	0.031	0.044
A1	0.000	0.100	0.000	0.004
B	1.150	1.350	0.045	0.054
b	0.150	0.400	0.006	0.016
C	1.800	2.450	0.071	0.096
D	1.800	2.250	0.071	0.089
e	0.650		0.026	
H	0.080	0.260	0.003	0.010
L	0.210	0.460	0.008	0.018