

#### =U (EE 500mA Low Power LDO

#### **Features**

Low voltage drop: 0.17V@100mA

High input voltage: 15V

Low temperature coefficient

Large Output Current: >0.35A

Low Quiescent Current: 1.0uA

• Output voltage accuracy: tolerance  $\pm 2\%$ 

Built-in current limiter

SOT89,SOT89-5,SOT23-3 and SOT23-5

packages

#### **Applications**

Battery-powered equipment

Hand-Hold Equipment

#### GRS Receivers

Wireless LAN

#### **General Description**

The APT ÏÌ ÝÝ series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The APT ÏÌÝÝ consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series. SOT89, SOT89-5,SOT23-3 and SOT23-5 packages are available.

#### **Selection Table**

Part No.	Output Voltage	Package	Marking
J O 9: 3:	1.8V		
J O 9: 4:	2.8V	SOT89	
J O 9: 52	3.0V	SOT89-5	
J O 9: 55	3.3V	SOT23	Refer to Marking rule
J O 9: 58	3.6V	SOT23-5	
J O 9: 67	4.5V	SOT23-5B	
J O 9: 72	5.0V		

#### **Order Information**

PTÏ10234


Designator	Symbol	Description
1 2	Integer	Output Voltage(1.8~5.0V)
	Р	Package:SOT89
	P5	Package:SOT89-5
3	М	Package:SOT23-3
	M5	Package:SOT23-5
	M5B	Package:SOT23-5B
( <del>4</del> )	R	RoHS / Pb Free
4)	G	Halogen Free




# "500mA Low Power LDO


Note:"①②" stands for output voltages. Other voltages can be specially customized


#### **Block Diagram**





#### **Pin Assignment**














#### **Absolute Maximum Ratings**

Supply Voltage ......40  $^{\circ}$ C to 18V Storage Temperature ......40  $^{\circ}$ C to 125  $^{\circ}$ C Operating Temperature ......40  $^{\circ}$ C to 85  $^{\circ}$ C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.





## =U ŒE

### 500mA Low Power LDO

#### **Marking Rule**

#### (1) SOT23-3 and SOT23-5





#### List of Product Name vs. Product Code

Product	Pr	Product Code		
Name	(1)	(2)	(3)	
HM7812	S	Α	Α	
HM7813	S	Α	В	
HM7814	S	Α	С	
HM7815	S	Α	D	
HM7816	S	Α	E	
HM7817	S	Α	F	
HM7818	S	Α	G	
HM7819	S	Α	I	
HM7820	S	Α	J	
HM7821	S	Α	К	
HM7822	S	Α	L	
HM7823	S	Α	М	
HM7824	S	Α	N	
HM7825	S	Α	0	
HM7826	S	Α	Р	
HM7827	S	Α	Q	
HM7828	S	Α	R	
HM7829	S	Α	Т	
HM7830	S	Α	U	
HM7831	S	Α	V	


Product	Pr	oduct Co	de
Name	(1)	(2)	(3)
HM7832	S	Α	W
HM7833	S	Α	Х
HM7834	S	Α	Υ
HM7835	S	Α	Z
HM7836	S	В	Α
HM7837	S	В	В
HM7838	S	В	С
HM7839	S	В	D
HM7840	S	В	E
HM7841	S	В	F
HM7842	S	В	J
HM7843	S	В	Н
HM7844	S	В	I
HM7845	S	В	J
HM7846	S	В	К
HM7847	S	В	L
HM7848	S	В	М
HM7849	S	В	N
HM7850	S	В	0


NOTE: SOT23-5,the last is Z SOT23-5B,the last is Y



## 

#### (2) SOT89 and SOT89-5





utput	Voltag	ge Code			_
Vout	Code	Vout	Code	Vout	Code
1.5V	1	2, 7V	С	3. 9V	0
1.6V	2	2, 8V	D	4. OV	P
1.7V	3	2. 9V	E	4. 1V	Q
1.8V	4	3. 0V	F	4. 2V	R
1.97	5	3. 1V	G	4. 3V	S
2. <b>0</b> V	6	3. 2V	Н	4. 4V	T
2. 1V	7	3. 3V	I	4.5V	U
2. 2V	8	3. 4V	J	4. 6V	V
2.3V	9	3. 5V	K	4. 7V	W
2. 4V	0	3. 6V	L	4.8V	X
2.5V	A	3. 7V	M	4. 9V	Y
2. 6V	В	3. 8V	N	5. OV	Z

Note: The last two of them are based on the time of this product which is the first time into production, and the third is the launch of this product ,it can be in  $1 \sim 9$ , which is expressed in "0" in October, in November with an "A", in December with "B"; the fourth is of the launch of the product, such as expressed in "0" in 2010, in "3" in 2013. For example: EZ81 represents  $\cancel{R}$ PT  $\ddot{l}$   $\ddot{l}$  50PR product is first put into production in August in 2011.



# 500mA Low Power LDO

#### **Electrical Characteristics**

#### HM78XXM for any output voltage

(Ta=25 $^{\circ}$ C)

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
Output Voltage	Vout	Vin=Vout+1V	Vout×0.98		Vout×1.02	V
Output Voltage	Vouc	1.0mA≤lout≤30mA	Vouc-0.50		V040-1.02	·
Output Current*1	lout	Vin-Vout=1V		500		mA
Low dropout*2	Vdrop		Refer to the	next table		
Line Demulation	$\Delta V_{\scriptscriptstyle OUT}$	1.6V≤Vin≤8V		0.05		0/ /\
Line Regulation	$\overline{\Delta V_{\scriptscriptstyle IN} \times V_{\scriptscriptstyle OUT}}$	lout=100mA		0.05	0.2	%/V
Load Regulation	riangleVout	Vin= Vout+1V		12	30	mV
Load Regulation	∠∆vout	1.0mA≤lout≤100mA		12	30	IIIV
Output voltage	A IZ	lout=30mA				
Temperature	$rac{\Delta V_{\scriptscriptstyle OUT}}{\Delta Ta}$			±100		Ppm/℃
Coefficiency	$\Delta Ia$	0°C≤Ta≤70°C				
PSRR	PSRR	F=1KHz		40		dB
אכץ	אמין	Vin=Vout+1V		40		ub
Supply Current	lss1			1	2	uA
Input Voltage	Vin		3.5		15	V


#### Electrical Characteristics by Output Voltage:


0.4	Dropout Voltage Vdif(V)			
Output Voltage Vout(V)	Conditions	Тур.	Max.	
Vout ≤ 2.0V	Iout=60 mA	0.1	0.12	
2.0 < Vout ≤ 3.0	lout=80 mA	0.12	0.14	
3.0 < Vout ≤ 4.0	lout=100 mA	0.16	0.18	
4.0 < Vout ≤ 5.0		0.17	0.18	
3.0 < Vout ≤ 4.0	Janut 200 A	0.21	0.24	
4.0 < Vout ≤ 6.0	lout=200 mA	0.20	0.22	
3.0 < Vout ≤ 4.0		0.7	0.75	
4.0 < Vout ≤ 6.0	lout=500 mA	0.72	0.76	



#### =U CEE 500mA Low Power LDO

#### **Typical Application**

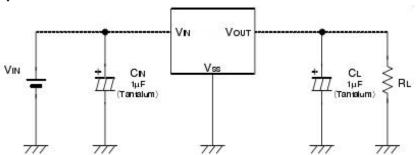

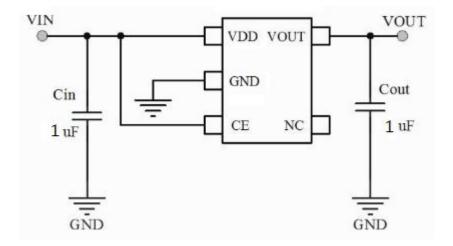

Note1:Input capacitor  $C_{IN}$ =1uF.


Note2:Ouput capacitor  $C_{\text{OUT}}=1\text{uF}/6.8\text{uF}(1\text{uF}$  Tantalum capacitor or 6.8uF ceramic capacitor is recommended).





# 

#### **Typical Performance Characteristics**

#### (1) Output Voltage vs Input voltage








Ver2.0 7 May 19,2016




# 500mA Low Power LDO

#### (2) Output Valtage up Output Output

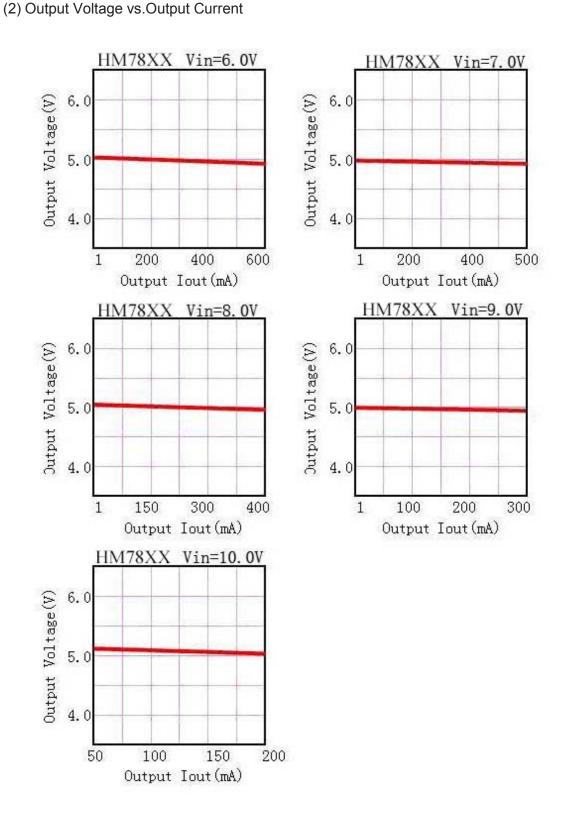



#### (3) Output Voltage vs. Ambient Temperature

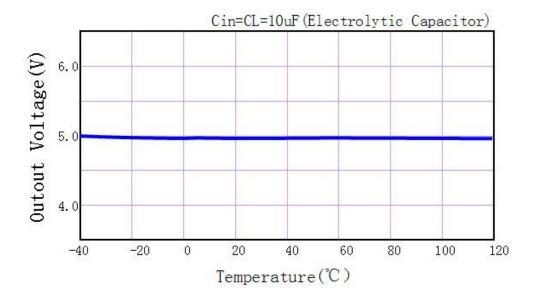




## ....=U **CEE**

### 500mA Low Power LDO

## Package Information 3-pin SOT89 Outline Dimensions

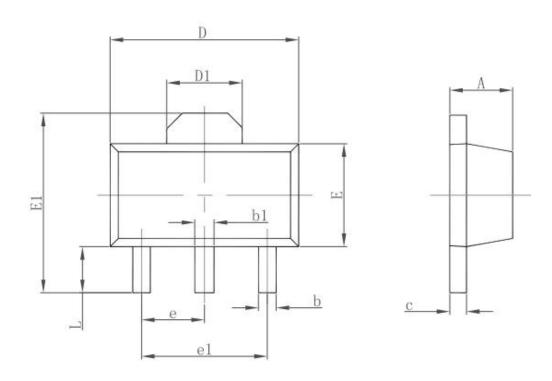

Symbol	Dimensions	In Millimeters	Dimension	s In Inches
Symbol	Min.	Max.	Min.	Max.
Α	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
С	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061	REF.
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
е	1.500	TYP.	0.060 TYP.	
e1	3.000	TYP.	0.118 TYP.	
L	0.900	1.200	0.035	0.047


Ver2.0 10 May 19,2016



## =U

## 500mA Low Power LDO

#### **SOT89-5** Outline Dimensions

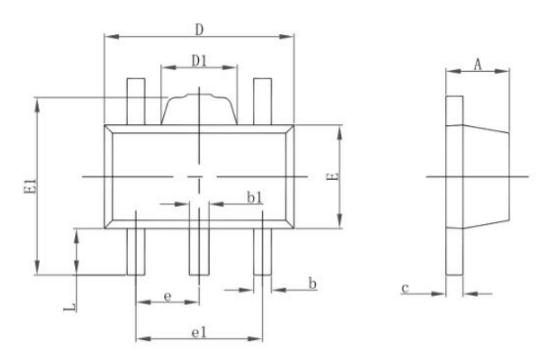


Symbol	Dimensions In Millimeters		Dimension	s In Inches
Symbol	Min.	Max.	Min.	Max.
Α	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
С	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
е	1.500	TYP.	0.060TYP.	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043





## =U ŒE

## 500mA Low Power LDO

#### 3-pin SOT23-3 Outline Dimensions

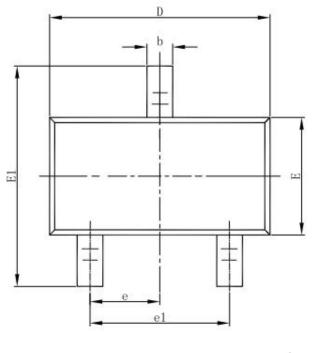

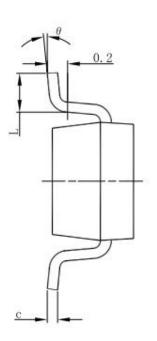




Ch a l	Dimensions In	Millimeters	Dimensions	In Inches
Symbol	Min	Max	Min	Max
Α	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
С	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
е	0.950(E	BSC)	0.037	(BSC)
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



## =U **Œ**E

## 500mA Low Power LDO

#### **SOT23-5** Outline Dimensions

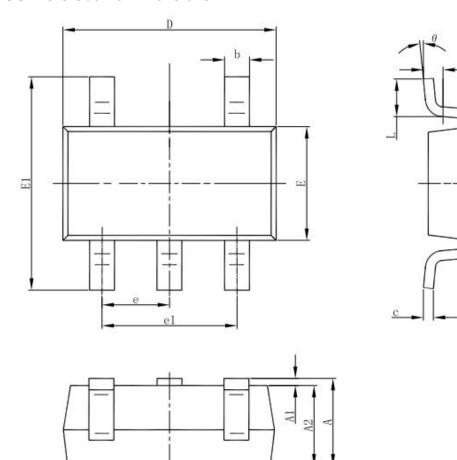

OL . I	Dimensions In	Millimeters	Dimensions	In Inches
Symbol	Min	Max	Min	Max
Α	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
С	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
Е	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
е	0.950(B	SC)	0.037	(BSC)
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Ver2.0 13 May 19,2016