

80mΩ, Adjustable Fast Response Current-Limited Power-Distribution Switch

FEATURES

- Compliant to USB Specifications
- Integrated 80mΩ Power MOSFET
- Low Supply Current
15μA Typical at Switch On State
1μA Typical at Switch Off State
- Wide Input Voltage Range: 2.4V to 5.5V
- Fast Transient Response: <2μs
- Reverse Current Flow Blocking
- Thermal Shutdown Protection
- Hot Plug-In Application (Soft-Start)
- Available in a 5-Pin SOT23-5 Package

APPLICATIONS

- USB Bus/Self Powered Hubs
- USB Peripherals
- Notebook Computers
- Battery-Charger Circuits
- Personal Communication Devices

GENERAL DESCRIPTION

The HM4610H is a cost-effective, low voltage, single P-MOSFET load switch, optimized for self-powered and bus-powered Universal Serial Bus (USB) applications. This switch operates with inputs ranging from 2.4V to 5.5V, making it ideal for both 3V and 5V systems. The switch's low $R_{DS(ON)}$, 80mΩ, meets USB voltage drop requirements. The HM4610H is also protected from thermal overload which limits power dissipation and junction temperatures. Current limit threshold is programmed with a resistor from SET to ground. The quiescent supply current is typically 15μA at switch on state. At switch off state the supply current decreases to less than 1μA. The HM4610H is available in SOT23-5 package.

TYPICAL APPLICATION


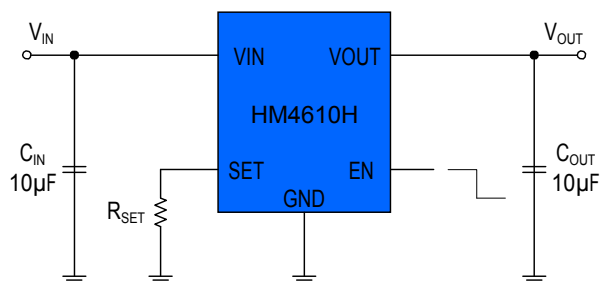



Figure 1. Basic Application Circuit

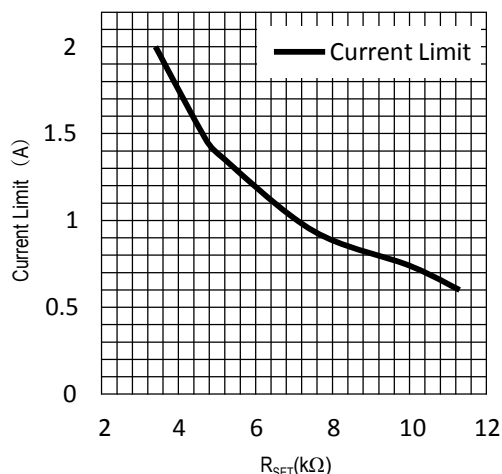

ABSOLUTE MAXIMUM RATINGS (Note 1)

Input Supply Voltage.....	-0.3V to 7V	Junction Temperature(Note2).....	150°C
EN Voltages.....	-0.3V to ($V_{IN}+0.3V$)	Operating Temperature Range.....	-40°C to 85°C
SET Voltage.....	-0.3V to ($V_{IN}+0.3V$)	Lead Temperature(Soldering,10s).....	300°C
Power Dissipation.....	0.4W	Storage Temperature Range.....	-65°C to 150°C
Thermal Resistance θ_{JC}	130°C/W	ESD HBM(Human Body Mode).....	2kV
Thermal Resistance θ_{JA}	250°C/W	ESD MM(Machine Mode).....	200V

PACKAGE/ORDER INFORMATION

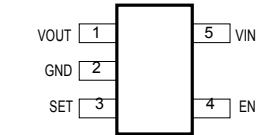	Order Part Number	Package	Top Marking
<p>TOP VIEW</p>  <p>5-LEAD PLASTIC SOT-23 $T_{JMAX} = 150^{\circ}C$, $\theta_{JA} = 250^{\circ}C/W$, $\theta_{JC} = 130^{\circ}C/W$</p>	HM4610H	SOT23-5	D00HAW

PIN DESCRIPTION

Pin Name	Pin Number	Description
VOUT	1	Power-switch output
GND	2	Ground connection; connect externally to Power PAD
SET	3	External resistor used to set current-limit threshold
EN	4	Enable input, logic high turns on power switch
VIN	5	Input voltage; connect a 10uF or greater ceramic capacitor from VIN to GND as close to the IC as possible

ELECTRICAL CHARACTERISTICS (Note 3)

($V_{IN}=5V$, $T_A=-40^{\circ}C$ to $85^{\circ}C$, unless otherwise noted.)


PARAMETER		SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage Range		V _{IN}		2.4		5.5	V
Switch On Resistance		R _{DS(ON)}	V _{IN} =5V		80	100	mΩ
			V _{IN} =3V		90	110	mΩ
Operation Quiescent Current		I _Q	V _{IN} =5V,EN=Active, No load		15	25	μA
Off Supply Current		I _{Q(OFF)}	V _{IN} =5.5V,EN=Inactive			1	μA
Off Switch Current		I _{Q(SW_OFF)}	V _{IN} =5.5V,EN=Inactive			1	μA
Under-voltage Lockout		V _{UVLO}	V _{IN} Increasing		1.8	2.4	V
Under-voltage Lockout Hysteresis		ΔV _{UVLO}	V _{IN} decreasing		0.1		V
Current Limit Threshold		I _{LIM}	R _{SET} =6.8kΩ		1		A
EN Threshold	Logic-Low Voltage	V _{IL}	V _{IN} =2.5V to 5.5V			0.8	V
	Logic-High Voltage	V _{IH}	V _{IN} =2.5V to 5.5V	2			V
Output Leakage Current		I _{LEAK}	EN=Inactive, R _{LOAD} =0Ω		0.5	10	μA
Current Limit Response Time		T _{RESP}	V _{IN} =5V		1		μs
Thermal Shutdown Protection		T _{SD}			150		°C
Thermal Shutdown Hysteresis		ΔT _{SD}			20		°C

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.


Note 2: T_J is calculated from the ambient temperature T_A and power dissipation P_D according to the following formula: $T_J = T_A + (P_D) \times (250^{\circ}C/W)$.

Note 3: 100% production test at $25^{\circ}C$. Specifications over the temperature range are guaranteed by design and characterization.


TYPICAL PERFORMANCE CHARACTERISTICS

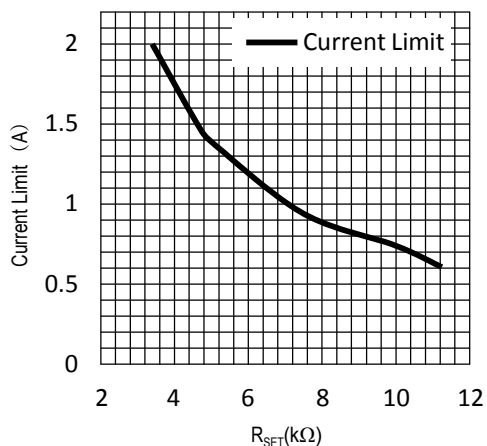


HM4610H TURN ON
 $V_{IN}=5V, C_{OUT}=10\mu F, T_A=25^\circ C$

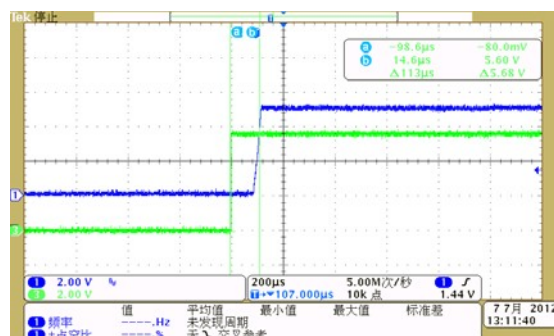

HM4610H TURN OFF
 $V_{IN}=5V, C_{OUT}=10\mu F, T_A=25^\circ C$

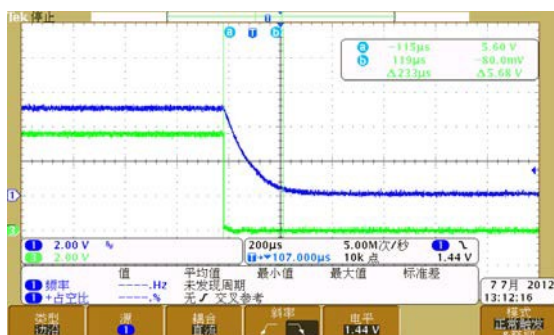

Short Response
 $V_{IN}=5V, C_{OUT}=10\mu F, T_A=25^\circ C$

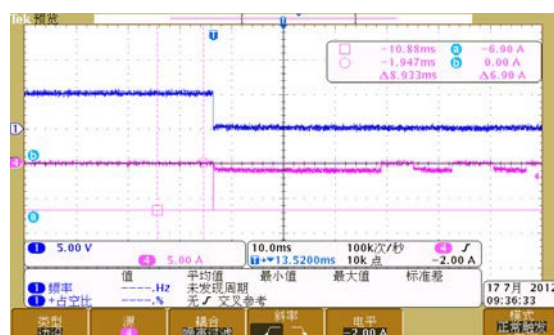

FUNCTIONAL BLOCK DIAGRAM

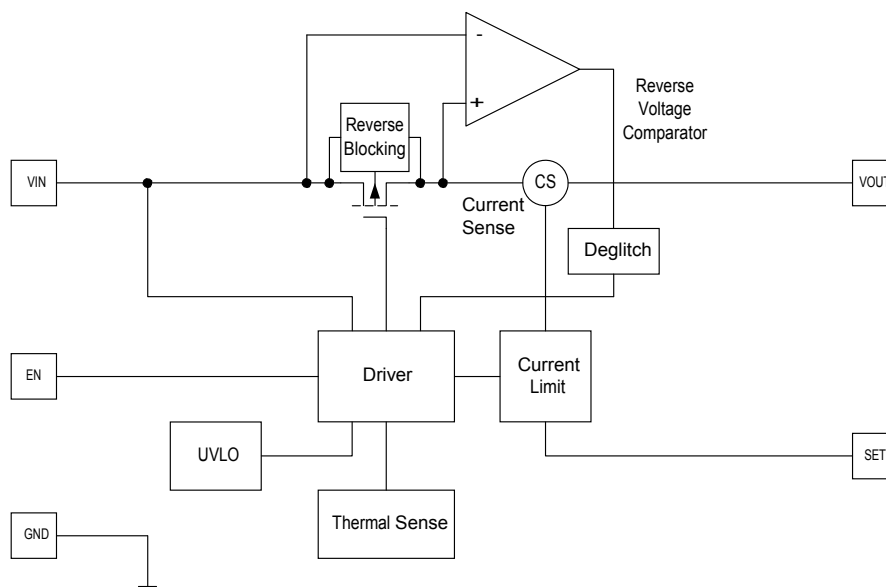


Figure 2. HM4610H Block Diagram

APPLICATIONS INFORMATION

The HM4610H is a single channel current limiting load switch that is intended to protect against short circuit and over current events by current limiting to a preset level. This device is optimized for self-powered and bus-powered Universal Serial Bus (USB) applications. The switch's low RDS(ON) , 80mΩ , meets USB voltage drop requirements; and a flag output is available to indicate fault conditions to the local USB controller.

Input and Output

VIN (input) is the power source connection to the internal circuitry and the source of the MOSFET. VOUT (output) is the drain of the MOSFET. In a typical application, current flows through the switch from VIN to VOUT toward the load. If VOUT is greater than VIN, current will flow from VOUT to VIN since the MOSFET is bidirectional when on. The HM4610H's reverse current blocking feature

prevents current to flow from V_{OUT} to V_{IN} when the device is disabled.

Soft Start for Hot Plug-In Applications

In order to eliminate the upstream voltage droop caused by the large inrush current during hot-plug events, the “soft-start” feature effectively isolates the power source from extremely large capacitive loads, satisfying the USB voltage droop requirements.

Input capacitor

The input capacitor C_{IN} protects the power supply from current transients generated by the load attached to the HM4610H. When a short circuit is suddenly applied to the output of the HM4610H, a large current, limited only by the R_{DS(ON)} of the MOSFET, will flow for less than 2μs before the current limit circuitry activates. In this event, a moderately sized C_{IN} will dramatically reduce the voltage transient seen by the power

supply and by other circuitry upstream from the HM4610H. The extremely fast short-circuit response time of the HM4610H reduces the size requirement for CIN. CIN should be located as close to the device VIN pin as practically possible. Ceramic, tantalum, or aluminum electrolytic capacitors are appropriate for CIN. There is no specific capacitor ESR requirement for CIN. However, for higher current operation, ceramic capacitors are recommended for CIN due to their inherent capability over tantalum capacitors to

withstand input current surges from low impedance sources such as batteries in portable devices.

Output capacitor

A low-ESR 150μF aluminum electrolytic or tantalum between VOUT and GND is strongly recommended to meet the 330mV maximum droop requirement in the hub VBUS (Per USB 2.0, output ports must have a minimum 120μF of low-ESR bulk capacitance per hub). Standard bypass methods should be used to minimize inductance and resistance between the bypass capacitor and the downstream connector to reduce EMI and decouple voltage droop caused when downstream cables are hot-insertion transients. Ferrite beads in series with VBUS the ground line and the 0.1μF bypass capacitors at

the power connector pins are recommended for EMI and ESD protection. The bypass capacitor itself should have a low dissipation factor to allow decoupling at higher frequencies.

Thermal Considerations

Since the HM4610H has internal current limit and over temperature protection, junction temperature is rarely a concern. However, if the application requires large currents in a hot environment, it is possible that temperature, rather than current limit, will be the dominant regulating condition. In these applications, the maximum current available without risk of an over-temperature condition must be calculated. Power dissipation can be

calculated based on the output current and the $R_{DS(ON)}$ of switch as below.

$$P_D = R_{DS(ON)} \times I_{OUT}^2$$

Although the devices are rated for 2A(max) of output current, but the application may limit the amount of output current based on the total power dissipation and the ambient temperature. The final operating junction temperature for any set of conditions can be estimated by the following thermal equation :

$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_A}{\theta_{JA}}$$

Where TJ(MAX) is the maximum operation junction temperature 150°C, TA is the ambient temperature and the θ_{JA} is the junction to ambient thermal resistance. The junction to ambient thermal resistance θ_{JA} is layout dependent. For SOT23-5 and TSOT23-5 packages, the thermal resistance θ_{JA} is 250°C/W. The maximum power dissipation at $T_A = 25^\circ\text{C}$ is 0.4W for SOT23-5 and TSOT23-5 Package.

Current limit threshold Setting

Current limit threshold is programmed with a resistor from SET to ground marked as R_{SET} . It can be estimated by the following equation:

$$I_{SET}(A) = \frac{6.8k\Omega}{R_{SET}(k\Omega)}$$

Such as the following table.

$I_{SET}(mA)$	$R_{SET}(k\Omega)$
600	11.3
800	8.45
1000	6.8
1500	4.53
2000	3.4

PCB Layout Recommendations

When laying out the printed circuit board, the following checking should be used to ensure proper operation of the HM4610H. Check the following in your layout:

- Does the (+) plates of C_{IN} connect to V_{IN} as closely as possible. This capacitor provides the AC current to the internal power MOSFETs.
- Keep the (-) plates of C_{IN} and C_{OUT} as close as possible


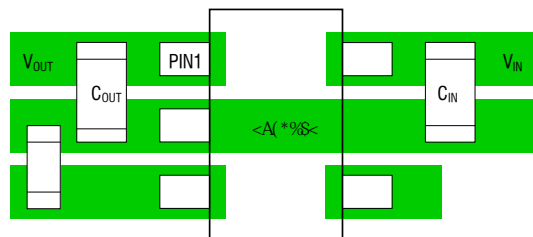


Figure 3. HM4610H Suggested Layout

PACKAGE DESCRIPTION

SOT23-5

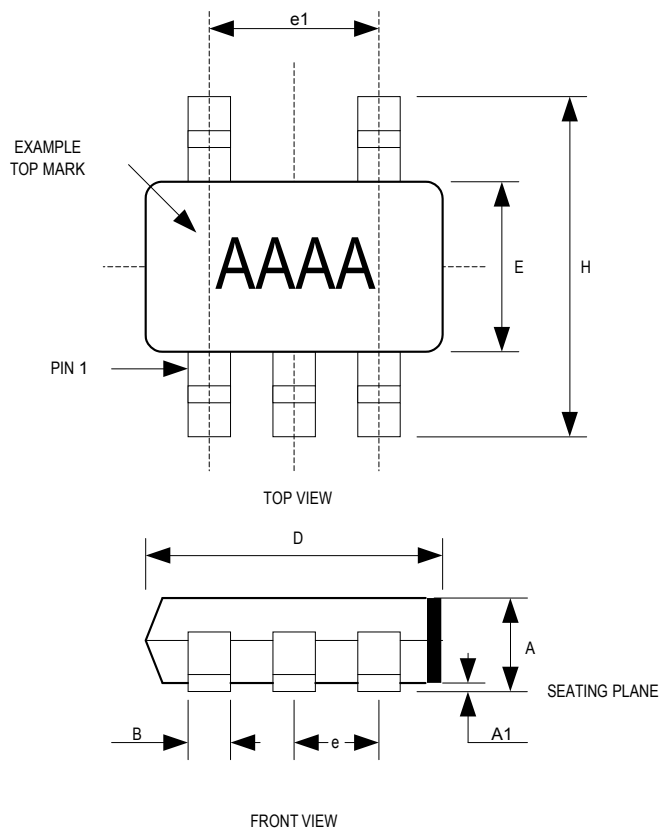

5LD SOT-23 PACKAGE OUTLINE DIMENSIONS

Dimension	Min.	Max.
A	1.05	1.35
A1	0.04	0.15
B	0.3	0.5
C	0.09	0.2
D	2.8	3.0
H	2.5	3.1
E	1.5	1.7
e	0.95 REF.	
e1	1.90 REF.	
L1	0.2	0.55
L	0.35	0.8
Q	0°	10°

- NOTE:
- 1.DIMENSIONS ARE IN MILLIMETERS
 - 2.DRAWING NOT TO SCALE
 - 3.DIMENSIONS ARE INCLUSIVE OF PLATING
 - 4.DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR