


1. 概述

HM2511B 為單晶片 CMOS 的雙向馬達驅動IC，利用大型積體電路(LSI)製造技術，具有低電源及低成本的特性，可應用於低電壓工作模式。電路採用H橋架構，內置功率 MOSFET 開關，可實現對直流電機做 正轉、反轉、煞車、停止 四個功能的控制。

2. 功能

- (1). 寬廣的工作電壓： 1.8V ~ **6.8V**。
- (2). 內置 PMOS/NMOS 功率開關的 H 橋驅動器。
- (3). 支援**4種**操作模式：正轉 / 反轉 / 制動 / 停止。
- (4). 低待機電流 (Typ.=0.1uA)。
- (5). **1000mA** 以上電流輸出能力。
- (6). 內建過溫保護功能 。(TSD, Thermal Shutdown)
- (7). CMOS 輸入，輸入腳內建下拉電阻，無需外加限流電阻。
- (8). 高達 5KV 的人體靜電模式 (HBM) 的 ESD 保護。
- (9). 邏輯電源VDD掉電過低時，輸出會進入**停止(Standby)** 模式。
- (10). 提供 SOP-8 封裝。

8-pin SOP-8

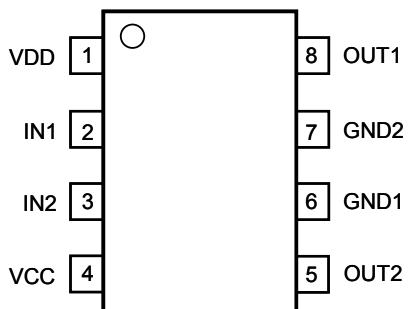


1. GENERAL DESCRIPTION

HM2511B is a single-chip bi-directional motor driver CMOS IC for low-voltage applications. It is designed by LSI high technology with a low-power and low-cost process. It has H bridge driver of built-in MOSFET power switch to provide Forward / Reverse / Brake / Stop function for motor driver applications.


2. FEATURES

- (1). Wide operating voltage: 1.8V ~ **6.8V**.
- (2). H bridge driver of internal PMOS/NMOS power switches.
- (3). Support 4 operating mode: Forward / Backward / Brake / Stop.
- (4). Low standby current. (Typ.=0.1uA)
- (5). Over **1000mA** output current capability.
- (6). Built-in Thermal Shutdown (TSD) circuit.
- (7). CMOS input. Built-in input pull-low resistance and no current-limit resistance required.
- (8). High 5KV Human Body Mode (HBM) ESD protection.
- (9). **Stop (Standby) mode will take place after logic power VDD is too low or disappeared.**
- (10).SOP-8 package type are available.

8-pin SOP-8

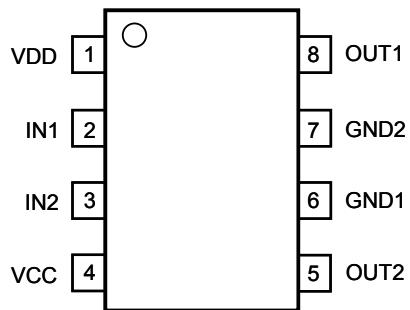

3. BLOCK DIAGRAM

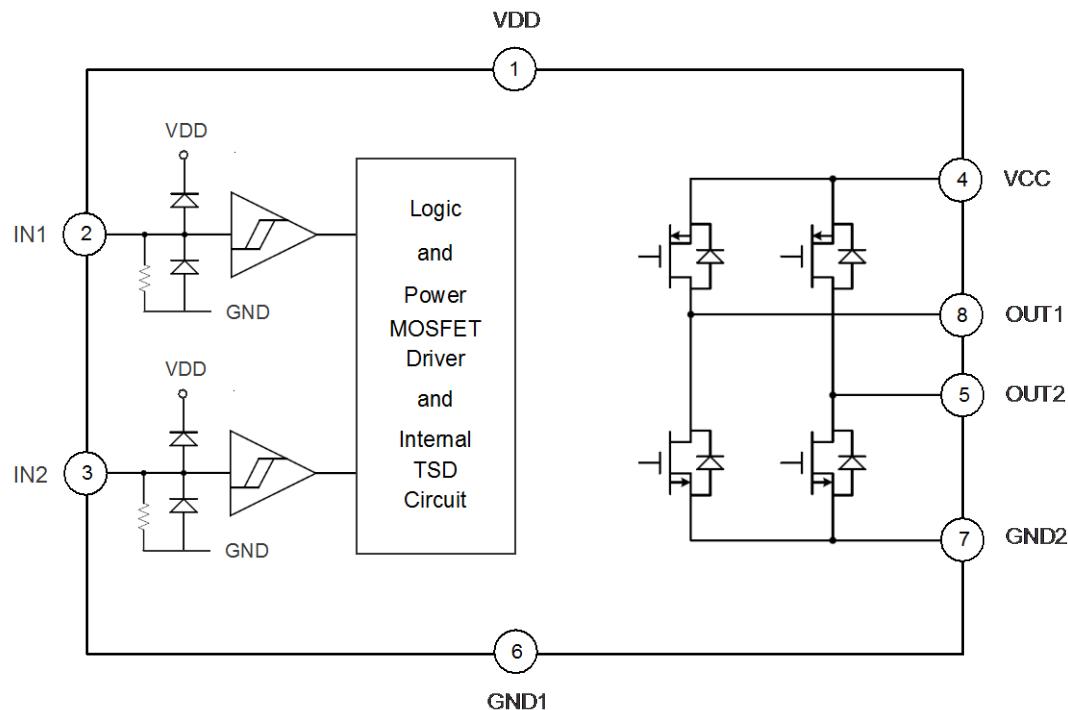

4. PIN DESCRIPTION

Pin Name	Pin No.	ATTR.	Description
IN1	2	I	Forward rotation logic input.
IN2	3	I	Backward rotation logic input.
OUT1	8	O	Forward rotation output.
OUT2	5	O	Backward rotation output.
VDD	1	Power	Positive power of logic control circuit.
VCC	4	Power	Positive power of output power MOSFET.
GND1	6	Power	Negative power of logic control circuit.
GND2	7	Power	Negative power of output power MOSFET.
Ex-Pad	9	Power	Exposed pad for thermal tab, must be connected to GND.

5. FUNCTION DESCRIPTION

IN1	IN2	OUT1	OUT2	Function
0	0	Z (Off)	Z (Off)	Stop (Standby)
1	0	1	0	Forward
0	1	0	1	Backward
1	1	0	0	Brake

6. ELECTRICAL CHARACTERISTICS

6.1 Absolute Maximum Rating


Symbol	Parameter		Rating	Unit
V _{DD} - V _{SS}	Supply voltage of logic control circuit		-0.5 ~ +7.5	V
V _{CC}	Supply voltage of output power MOSFET		7.5	V
I _{OUT-PEAK}	Output peak current		2.0	A
θ _{JA}	Thermal resistance (Junction to Ambient)	SOP-8	150	°C/W
P _D	Power dissipation	SOP-8	0.9	W
T _A	Operating ambient temperature		-40 ~ +85	°C
T _J	Operating junction temperature		+160	°C
T _{ST}	Storage temperature		-55 ~ +160	°C

6.2 DC Characteristics (V_{DD}=3.0V, V_{CC}=6.0V, T_A=25°C, unless otherwise specified)


Symbol	Parameter		Min.	Typ.	Max.	Unit	Condition
V _{DD}	Operating voltage (Logic)		1.8		6.8	V	
V _{CC}	Operating voltage (MOSFET)		1.8		6.8	V	
I _{SB}	Standby current			0.1	1	uA	IN1=IN2=0
I _{OP}	Operating current	V _{DD} = V _{CC} = 3.0V		370		uA	IN1=1, IN2=0 or IN1=0, IN2=1 or IN1=1, IN2=1
		V _{DD} = V _{CC} = 6.0V		650		uA	
I _{IH}	Input high current (12kΩ pull-low resistance)			260		uA	V _{IH} = 3.0V
				510		uA	V _{IH} = 6.0V
V _{IH}	Input high voltage		2			V	
V _{IL}	Input low voltage				0.8	V	
R _{ON}	Output resistance (SOP-8 Package)			0.48		Ω	I _{OUT} = 500mA
				0.52		Ω	I _{OUT} = 800mA
				0.64		Ω	I _{OUT} = 1200mA
I _{OUT}	Output continuous current (* with PCB heat dissipation)			1000	1300*	mA	SOP-8
I _{PULSE}	Pulsed drain current				5.0	A	Pulse width < 20ms
T _{RISE}	Output rise time			300		ns	PWM=20kHz, Duty=50%
T _{FALL}	Output fall time			120		ns	
T _{RP}	Input-to-Output response time			250		ns	
T _{TSD}	Thermal shutdown (TSD)			160		°C	Junction temperature
T _{TSDH}	Thermal shutdown hysteresis			35		°C	

7. APPLICATION CIRCUIT


(1) One Motor Bi-Directional Control
 (Single Power)

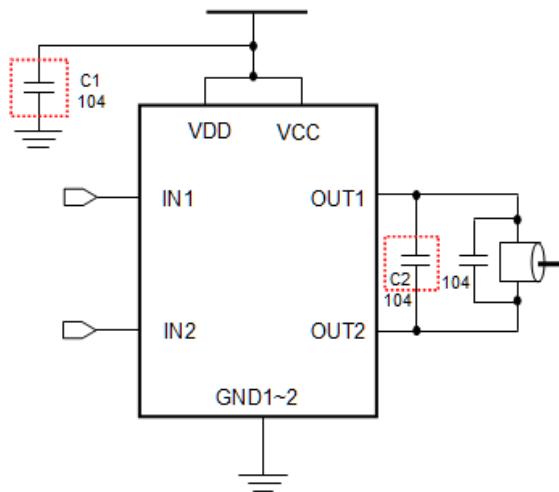


(2) Two Motors Directional Control
 (Single Power)

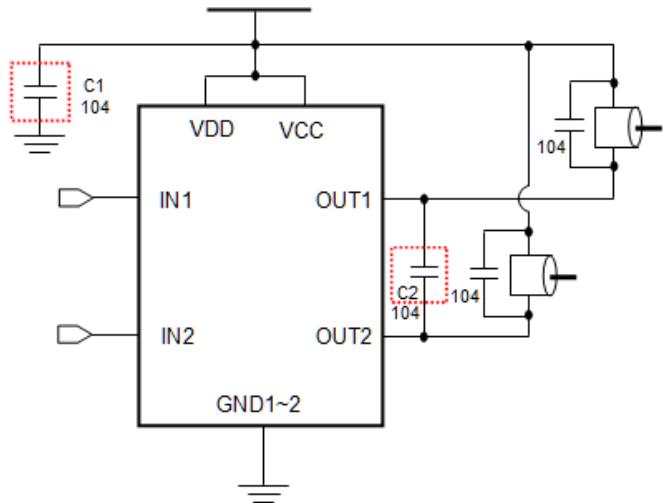

(3) One Motor Bi-Directional Control
 (Dual Power)

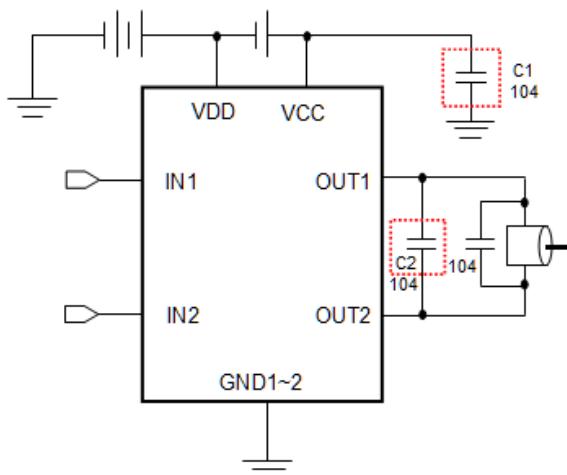

(4) Two Motors Directional Control
 (Dual Power)

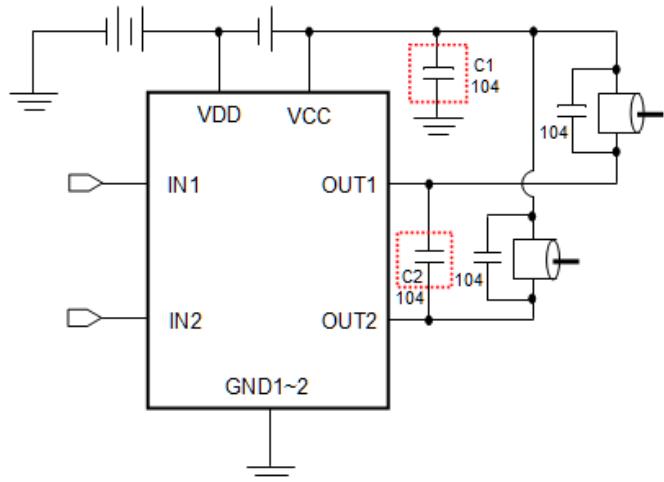


* In normal application, C1 (0.1uF) can be saved, but please reserve C1 space at PCB layout.

* If voltage is higher than 6.0V, C2 (0.1uF) is necessary to endure high voltage.

8. PACKAGE DIMENSION

8-Pin Plastic SOP (150 mil)

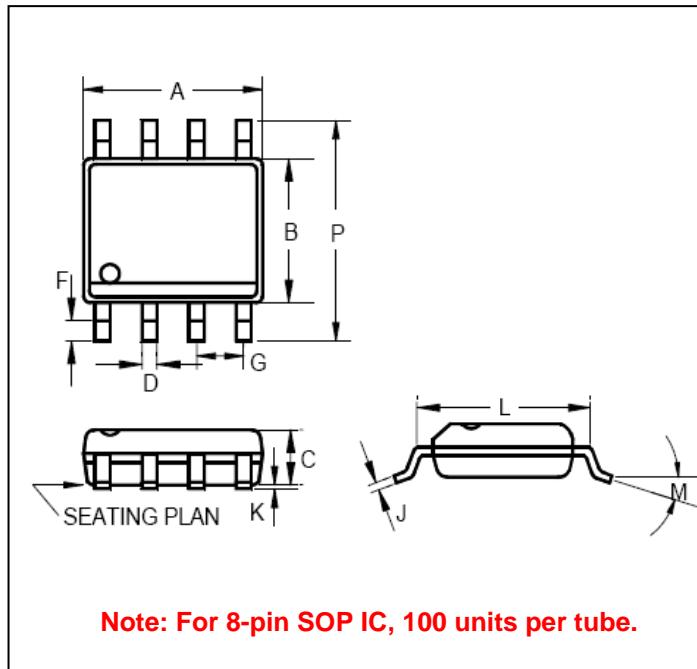

	INCHES			MILLIMETERS		
	MIN	TYP	MAX	MIN	TYP	MAX
A	0.183	-	0.202	4.65	-	5.13
B	0.144	0.150	0.163	3.66	3.81	4.14
C	0.068	-	0.074	1.35	-	1.88
D	0.010	-	0.020	0.25	-	0.51
F	0.015	-	0.035	0.38	-	0.89
G	0.050 BSC			1.27 BSC		
J	0.007	-	0.010	0.19	-	0.25
K	0.005	-	0.010	0.13	-	0.25
L	0.189	-	0.205	4.80	-	5.21
M	-	-	8°	-	-	8°
P	0.228	-	0.244	5.79	-	6.20

Note: For 8-pin SOP IC, 100 units per tube.

9. ORDERING INFORMATION

P/N	Package Type	Package Width	Shipping
HM2511B	SOP-8	150 mil.	<u>Tape & Reel</u> : 2.5K pcs per Reel <u>Tube</u> : 100 pcs per Tube