

HM5075DR- 600mA Linear Li-Ion Battery Charger

GENERAL DESCRIPTION

The HM5075DR is a complete constant current & constant voltage linear charger for single cell lithium-ion batteries. Its DFN2x3 package and low external component count make the HM5075DR ideally suited for portable applications.

Furthermore, the HM5075DR is specifically designed to work within USB power specifications.

No external sense resistor is needed, and no blocking diode is required due to the internal MOSFET architecture. Thermal feedback regulates the charge current to limit the die temperature during high power operation or high ambient temperature. The charge voltage is fixed at 4.2V, and the charge current can be programmed externally with a single resistor. The HM5075DR automatically terminates the charge cycle when the charge current drops to 1/10th the programmed value after the final float voltage is reached.

When the input supply (wall adapter or USB supply) is removed, the HM5075DR automatically enters a low current state, dropping the battery drain current to less than 2uA. The HM5075DR can be put into shutdown mode, reducing the supply current to 50uA.

Other features include Battery temperature monitor, under-voltage lockout, automatic recharge and two status pins to indicate charge and charge termination.

FEATURES

- Programmable Charge Current Up to 600mA
- No MOSFET, Sense Resistor or Blocking Diode Required
- Complete Linear Charger in SOT Package for single Cell Lithium-Ion Batteries
- Constant-Current/Constant-Voltage Operation with Thermal Regulation to Maximize Charge Rate Without Risk of Overheating
- Charges Single Cell Li-Ion Batteries Directly from USB Port
- Preset 4.2V Charge Voltage with $\pm 1\%$ Accuracy
- Charge Current Monitor Output for Gas Gauging
- Automatic Recharge
- Charge state pairs of output, no battery and fault status display
- C/10 Charge Termination
- 50uA Supply Current in Shutdown
- 2.9V Trickle Charge Threshold
- Soft-Start Limits Inrush Current
- Battery temperature monitoring function
- ESD HBM 8KV
- Available in DFN2x3-8 Package

APPLICATIONS

Cellular Telephones, PDAs, MP3 /MP4 Players
Charging Docks and Cradles
Bluetooth 、GPS Applications

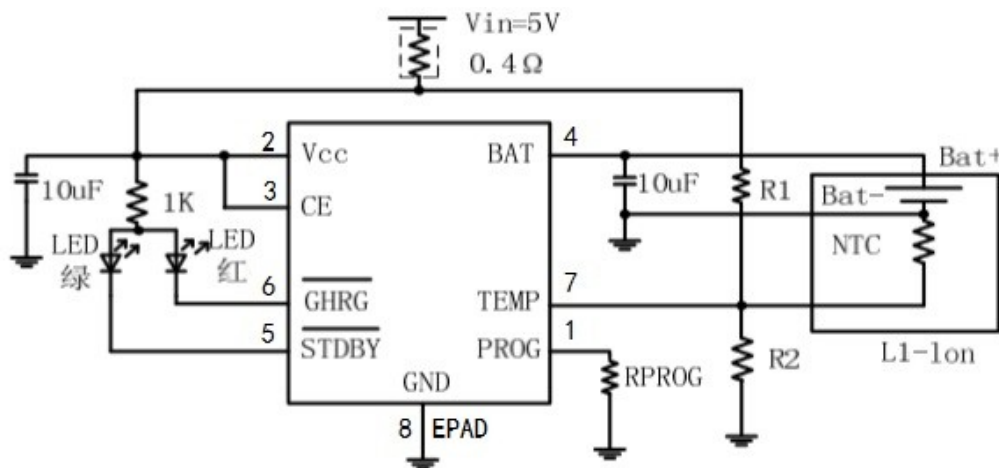


Figure1 . Typical Application Circuit

ORDERING INFORMATION

PART NUMBER	TEMP RANGE	VIN	VBAT	CHARGE CURRENT	PACKAGE	PINS
HM5075DR	-40°C to 85°C	4.5~6V	4.2V	0.6A	DFN2x3	8

PIN CONFIGURATION

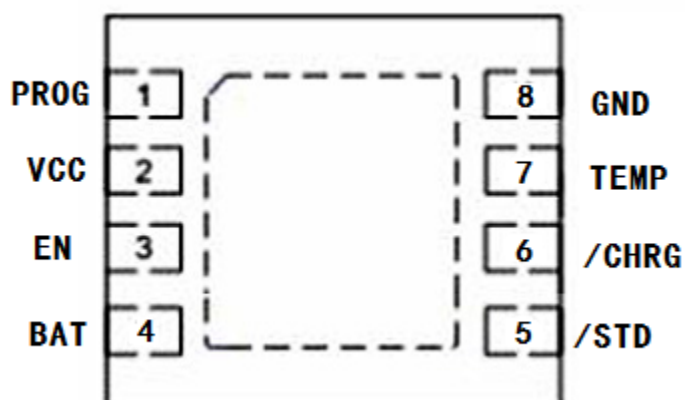


Figure 2. PIN Configuration

PIN DESCRIPTION

PIN NUMBER	PIN NAME	PIN DESCRIPTION
1	PROG	Charge Current Program, Charge Current Monitor and Shutdown Pin.
2	VCC	Positive Input Supply Voltage.
3	EN	Chip enable input.
4	BAT	Charge Current Output.
5	/STBY	The completion of battery charging instructions side.
6	/CHRG	Open-Drain Charge Status Output.
7,	TEMP	Battery temperature detection input, do not let this pin float.
8,9	GND&EPAD	Ground

ABSOLUTE MAXIMUM RATINGS

(Note: Do not exceed these limits to prevent damage to the device. Exposure to absolute maximum rating conditions for long periods may affect device reliability.)

PARAMETER	VALUE	UNIT
Input Supply Voltage VCC	VSS-0.3 ~ VSS+7	V
PROG pin Voltage Vprog	VSS-0.3 ~ Vcc+0.3	V
BAT pin Voltage Vbat	Vss-0.3 ~ 7	V
CHAG pin Voltage Vchrg	VSS-0.3 ~ VSS+7	V
BAT pin Current Ibat	0.75	A
PROG pin Current Iprog	0.75	mA
Operating Ambient Temperature	-40 to 85	°C
Maximum Junction Temperature	150	°C
Storage Temperature	-55 to 150	°C
Lead Temperature (Soldering, 10 sec)	260	°C

ELECTRICAL CHARACTERISTICS

(VCC = 5.0V, Vbat=3.5V TA= 25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage Range	VCC		4.25		6.5	V
Input supply current	Icc	Charge mode, RPROG =10K		350	2000	uA
		Standby mode		150	500	uA
		Shutdown mode(RPROG not connected,Vcc<Vbat or Vcc<Vuv)		50	100	uA
BAT pin Current	Ibat	RPROG =2k,Current mode	450	500	550	mA
		RPROG =10k,Current mode	93	100	107	mA
		Standby mode,Vbat=4.2V	0	-2.5	-6	uA
		Shutdown mode		1	2.5	uA
		Sleep mode,Vcc=0V		0.3	2.5	uA
Regulated Charge Voltage	Vfloat	0°C≤TA≤85°C, Icharge = 40mA	4.158	4.2	4.242	V
PROG pin Voltage	Vprog	RPROG =10k, Current mode	0.93	1.0	1.07	V
Trickle charge current	Itrikl	Vbat<Vtrikl,Rprog=2k	20	50	70	mA
Trickle charge Threshold Voltage	Vtrikl	RPROG =10K , Vbat Rising	2.8	2.9	3.0	V

Trickle voltage hysteresis voltage	Vtrhys	R _{PROG} =10K	60	80	110	mV
Recharge Battery threshold Voltage	ΔVrecg	V _{FLOAT} - V _{RECHRG}		150	300	mV
CHRG pin Output low voltage	Vchrg	Ichrg=5mA		0.35	0.6	V

PIN FUNCTION

PROG (PIN 1): Charge Current Program, Charge Current Monitor and Shutdown Pin.

The charge current is programmed by connecting a 1% resistor, R_{PROG}, to ground. When charging in constant-current mode, this pin serves to 1V. In all modes, the voltage on this pin can be used to measure the charge current using the following formula:

$$IBAT = (V_{PROG}/R_{PROG}) \times 1000.$$

The PROG pin can also be used to shut down the charger. Disconnecting the program resistor from ground allows a 3uA current to pull the PROG pin high. When it reaches the 1.21V shutdown threshold voltage, the charger enters shutdown mode, charging stops and the input supply current drops to 50uA. This pin is also clamped to approximately 2.4V. Driving this pin to voltages beyond the clamp voltage will draw currents as high as 1.5mA. Reconnecting R_{PROG} to ground will return the charger to normal operation.

VCC (PIN 2): Positive Input Supply Voltage.

Provides power to the charger, VCC can range from 4.25V to 6.5V and should be bypassed with at least a 10uF capacitor. When VCC drops to within 30mV of the BAT pin voltage, the HM5075DR enters shutdown mode, dropping IBAT to less than 2uA.

CE OR EN (PIN 3): Chip enable input.

High input level will make HM5075DR in normal working condition; low input level so that HM5075DR is prohibited charging status. CE pin can be TTL or CMOS level-level driver.

BAT (PIN 4): Charge Current Output.

Provides charge current to the battery and regulates the final float voltage to 4.2V. An internal precision resistor divider from this pin sets the float voltage which is disconnected in shutdown mode.

STDBY (PIN 5): The completion of battery charging instructions side.

When the battery charge is complete, STDBY pulled low by internal switches, indicating the completion of charging. In addition, STDBY pin will be in a high-impedance state.

CHRG (PIN 6): Open-Drain Charge Status Output.

When the battery is charging, the CHRG pin is pulled low by an internal N-channel MOSFET. When the charge cycle is completed, CHRG pin will be in a high-impedance state.

TEMP (PIN 7): Battery temperature detection input.

TEMP pin to receive the battery NTC sensor output.


If the TEMP pin voltage is less than the input voltage is greater than 45% or 80% of the input voltage means the battery temperature is too low or too high, then the charge has been suspended.

If the TEMPdirect access GND, battery temperature detection canceled, the other charged and functioning properly.




Please do not let this pin float.

GND & EPAD (PIN 8): Ground. Please connect with mass metal


TYPICAL PERFORMANCE CHARACTERISTICS

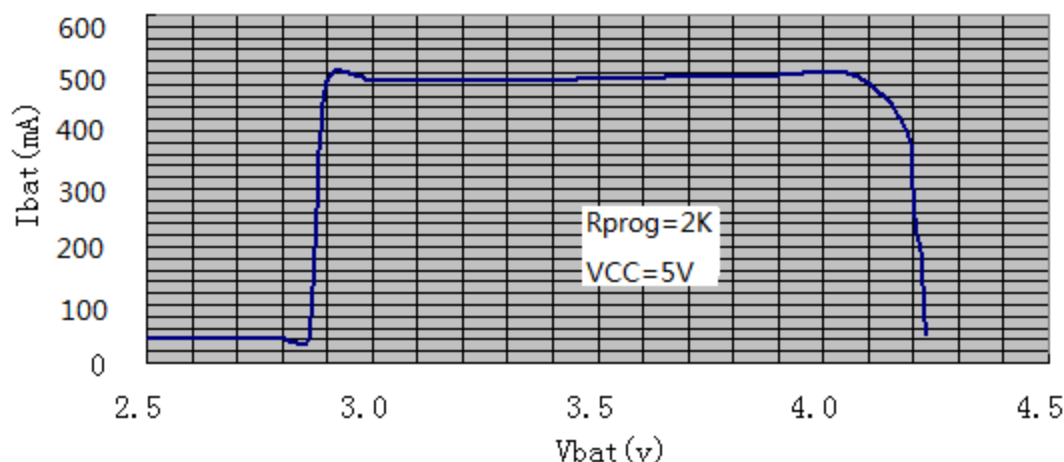


BATTERY CHARGER CURVE

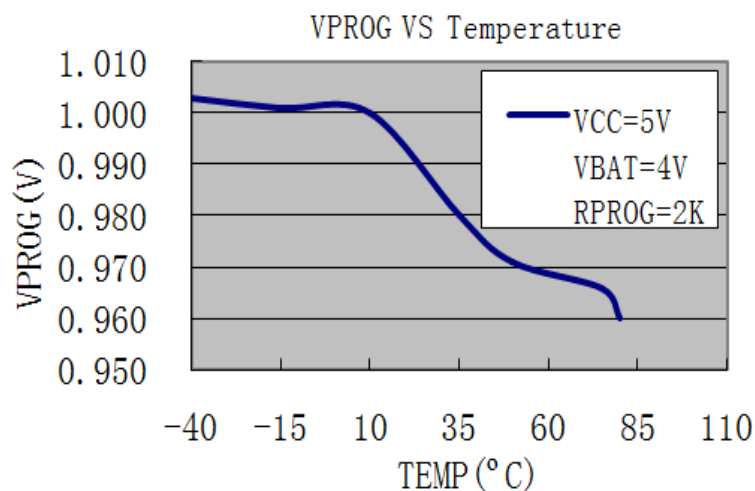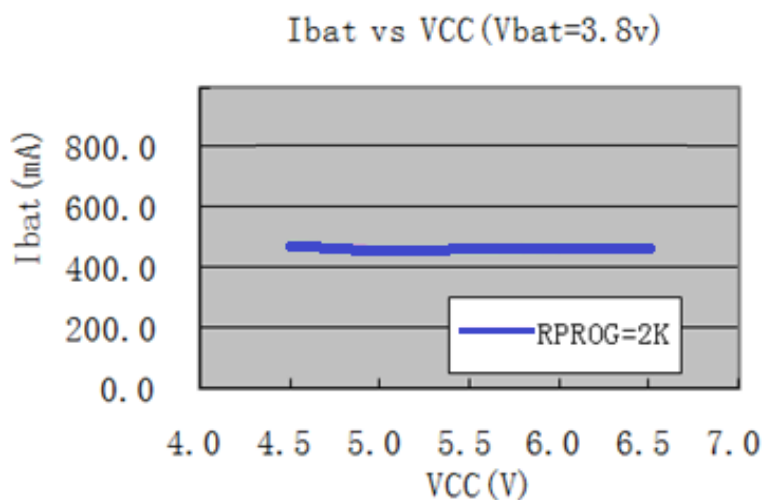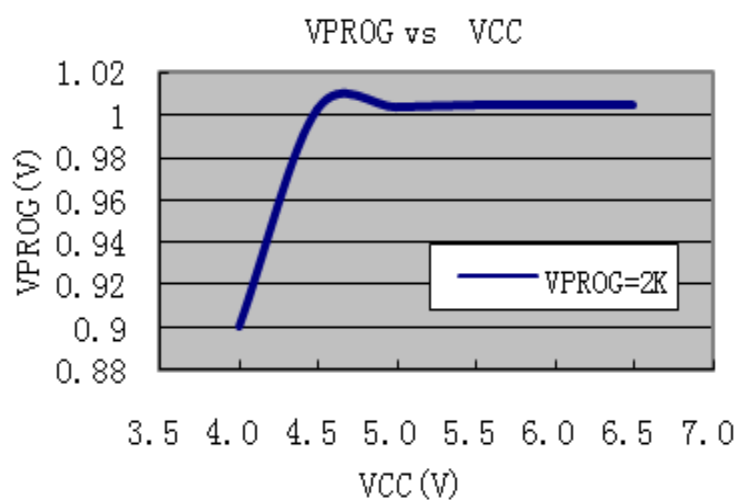

PROG PULL-UP CURRENT VS VPROG


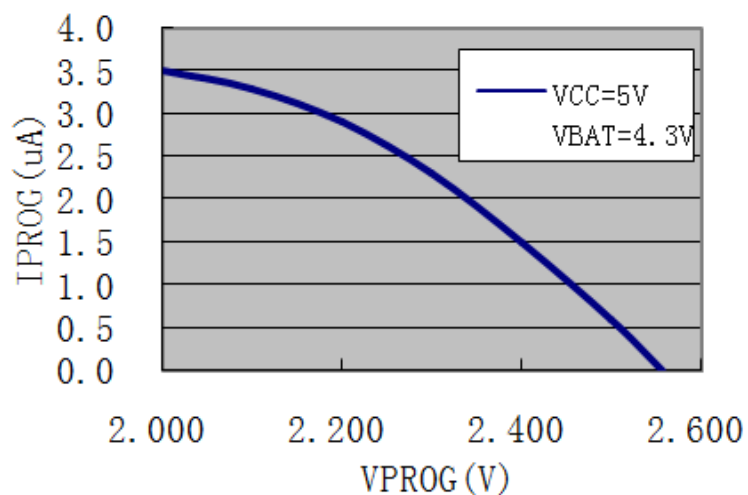


PROG CLAMP CURRENT VS VPROG

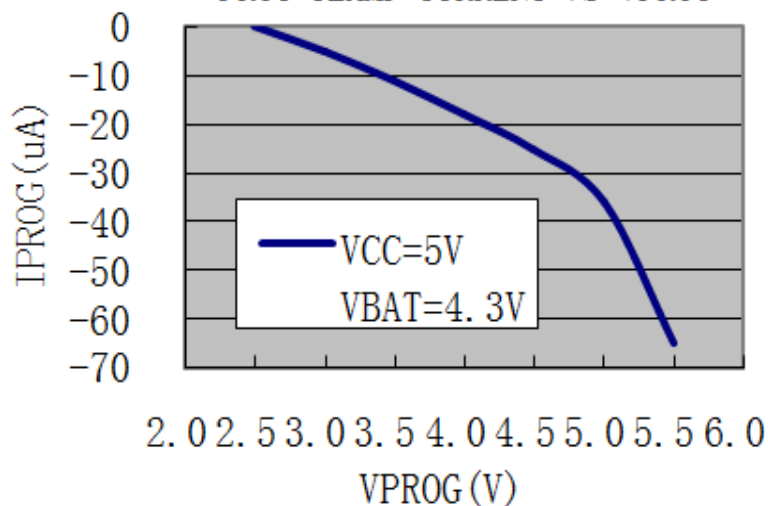

PACKAGE OUTLINE

DFN2X3-8 PACKAGE OUTLINE AND DIMENSIONS

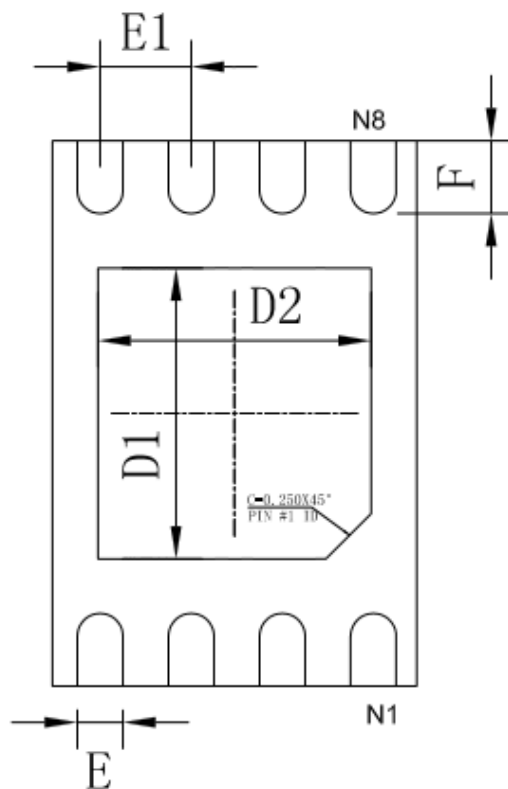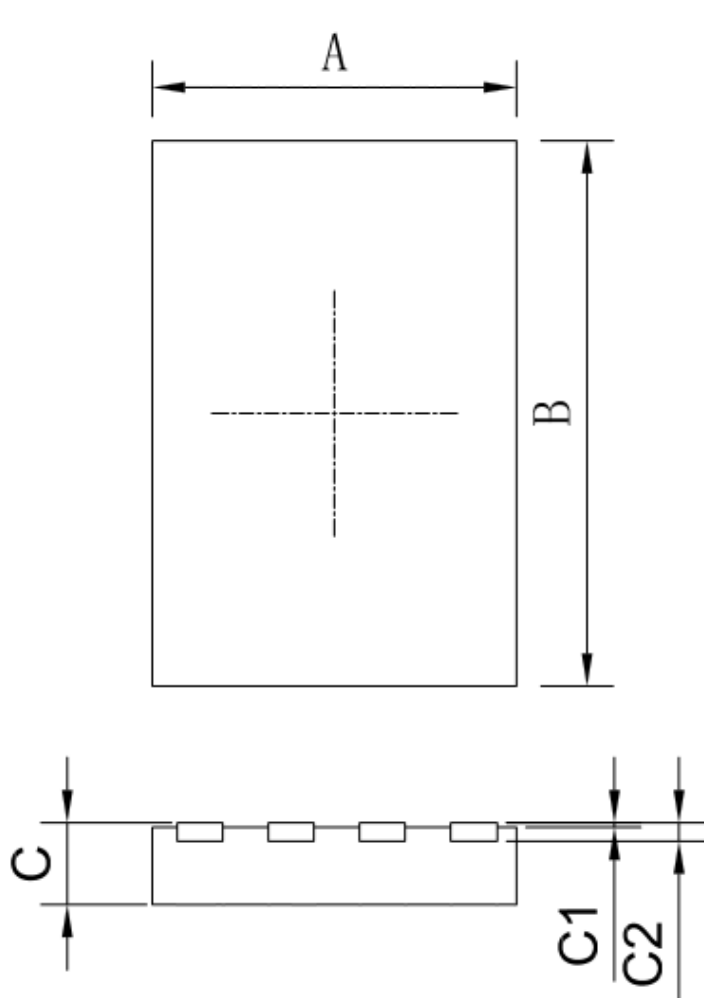

DIMENSION LABEL 尺寸 标注	MIN (mm) 最小 (mm)	MAX (mm) 最大 (mm)	DIMENSION LABEL 尺寸 标注	MIN (mm) 最小 (mm)	MAX (mm) 最大 (mm)
A	2.0±0.1		D1	1.60TYP	
B	3.0±0.1		D2	1.50TYP	
C	0.70	0.80	E	0.250TYP	
C1	0~0.050		E1	0.500TYP	
C2	0.203TYP		F	0.400TYP	