

## N-Channel Super Junction Power MOSFET

### General Description

The series of devices use advanced super junction technology and design to provide excellent  $R_{DS(ON)}$  with low gate charge. This super junction MOSFET fits the industry's AC-DC SMPS requirements for PFC, AC/DC power conversion, and industrial power applications.


### Features

- New technology for high voltage device
- Low on-resistance and low conduction losses
- Small package
- Ultra Low Gate Charge cause lower driving requirements
- 100% Avalanche Tested
- ROHS compliant

### Application

- Power factor correction (PFC)
- Switched mode power supplies(SMPS)
- Uninterruptible Power Supply (UPS)


|                  |      |    |
|------------------|------|----|
| $V_{DS}$         | 700  | V  |
| $R_{DS(ON)TYP.}$ | 1200 | mΩ |
| $I_D$            | 4    | A  |

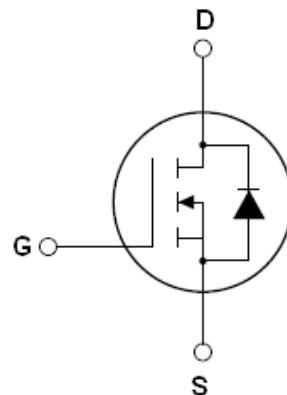

Schematic diagram

### Package Marking And Ordering Information

| Device   | Device Package | Marking  |
|----------|----------------|----------|
| HMS4N70I | TO-251         | HMS4N70I |
| HMS4N70K | TO-252         | HMS4N70K |

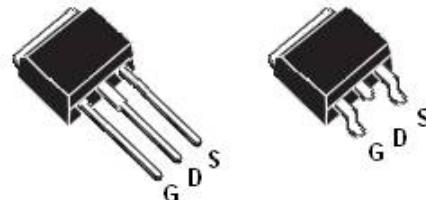

TO-251

TO-252

Table 1. Absolute Maximum Ratings ( $T_c=25^\circ\text{C}$ )

| Parameter  | Symbol                 | Value    | Unit                      |
|--|------------------------|----------|---------------------------|
| Drain-Source Voltage ( $V_{GS}=0\text{V}$ )  | $V_{DS}$               | 700      | V                         |
| Gate-Source Voltage ( $V_{DS}=0\text{V}$ )   | $V_{GS}$               | $\pm 30$ | V                         |
| Continuous Drain Current at $T_c=25^\circ\text{C}$                                     | $I_D(\text{DC})$       | 4        | A                         |
| Continuous Drain Current at $T_c=100^\circ\text{C}$                                    | $I_D(\text{DC})$       | 2.5      | A                         |
| Pulsed drain current <sup>(Note 1)</sup>   | $I_{DM}(\text{pulse})$ | 12       | A                         |
| Maximum Power Dissipation( $T_c=25^\circ\text{C}$ )<br>Derate above $25^\circ\text{C}$ | $P_D$                  | 46       | W                         |
|  |                        | 0.37     | $\text{W}/^\circ\text{C}$ |
| Single pulse avalanche energy <sup>(Note 2)</sup>                                      | $E_{AS}$               | 130      | mJ                        |
| Avalanche current <sup>(Note 1)</sup>  | $I_{AR}$               | 2        | A                         |
| Repetitive Avalanche energy , $t_{AR}$ limited by $T_{j\max}$<br>(Note 1)              | $E_{AR}$               | 0.2      | mJ                        |

| Parameter   | Symbol         | Value      | Unit |
|---|----------------|------------|------|
| Drain Source voltage slope, $V_{DS} \leq 480$ V,            | $dv/dt$        | 50         | V/ns |
| Reverse diode $dv/dt$ , $V_{DS} \leq 480$ V, $I_{SD} < I_D$ | $dv/dt$        | 15         | V/ns |
| Operating Junction and Storage Temperature Range            | $T_J, T_{STG}$ | -55...+150 | °C   |

**Table 2. Thermal Characteristic**

| Parameter   | Symbol     | Value | Unit  |
|---|------------|-------|-------|
| Thermal Resistance, Junction-to-Case (Maximum)    | $R_{thJC}$ | 2.7   | °C /W |
| Thermal Resistance, Junction-to-Ambient (Maximum) | $R_{thJA}$ | 75    | °C /W |

**Table 3. Electrical Characteristics (TA=25°C unless otherwise noted)**


| Parameter  | Symbol       | Condition   | Min                    | Typ  | Max       | Unit      |
|--|--------------|---|------------------------|------|-----------|-----------|
| <b>On/off states</b>                                 |              |   |                        |      |           |           |
| Drain-Source Breakdown Voltage                       | $BV_{DSS}$   | $V_{GS}=0$ V $I_D=250\mu A$                                 | 700                    |      |           | V         |
| Zero Gate Voltage Drain Current( $T_c=25^\circ C$ )  | $I_{DSS}$    | $V_{DS}=700$ V, $V_{GS}=0$ V                                |                        |      | 1         | $\mu A$   |
| Zero Gate Voltage Drain Current( $T_c=125^\circ C$ ) | $I_{DSS}$    | $V_{DS}=700$ V, $V_{GS}=0$ V                                |                        |      | 50        | $\mu A$   |
| Gate-Body Leakage Current                            | $I_{GSS}$    | $V_{GS}=\pm 30$ V, $V_{DS}=0$ V                             |                        |      | $\pm 100$ | nA        |
| Gate Threshold Voltage                               | $V_{GS(th)}$ | $V_{DS}=V_{GS}, I_D=250\mu A$                               | 2.5                    | 3    | 3.5       | V         |
| Drain-Source On-State Resistance                     | $R_{DS(ON)}$ | $V_{GS}=10$ V, $I_D=2$ A                                    |                        | 1200 | 1400      | $m\Omega$ |
| <b>Dynamic Characteristics</b>                       |              |   |                        |      |           |           |
| Forward Transconductance                             | $g_{FS}$     | $V_{DS} = 20$ V, $I_D = 2.5$ A                              |                        | 4    |           | S         |
| Input Capacitance                                    | $C_{iss}$    | $V_{DS}=50$ V, $V_{GS}=0$ V,<br>$f=1.0$ MHz                 |                        | 280  |           | PF        |
| Output Capacitance                                   | $C_{oss}$    |   |                        | 26   |           | PF        |
| Reverse Transfer Capacitance                         | $C_{rss}$    |   |                        | 2.3  |           | PF        |
| Total Gate Charge                                    | $Q_g$        | $V_{DS}=480$ V, $I_D=4$ A,<br>$V_{GS}=10$ V                 |                        | 6.5  | 10        | nC        |
| Gate-Source Charge                                   | $Q_{gs}$     |   |                        | 1.3  |           | nC        |
| Gate-Drain Charge                                    | $Q_{gd}$     |   |                        | 2.5  |           | nC        |
| Intrinsic gate resistance                            | $R_G$        |   | $f = 1$ MHz open drain | 2.5  |           | $\Omega$  |
| <b>Switching times</b>                               |              |   |                        |      |           |           |
| Turn-on Delay Time                                   | $t_{d(on)}$  | $V_{DD}=380$ V, $I_D=2.5$ A,<br>$R_G=20\Omega, V_{GS}=10$ V |                        | 6    |           | nS        |
| Turn-on Rise Time                                    | $t_r$        |   |                        | 3    |           | nS        |
| Turn-Off Delay Time                                  | $t_{d(off)}$ |   |                        | 48   | 60        | nS        |
| Turn-Off Fall Time                                   | $t_f$        |   |                        | 8    | 15        | nS        |
| <b>Source- Drain Diode Characteristics</b>           |              |   |                        |      |           |           |
| Source-drain current(Body Diode)                     | $I_{SD}$     | $T_c=25^\circ C$  |                        |      | 4         | A         |
| Pulsed Source-drain current(Body Diode)              | $I_{SDM}$    |   |                        |      | 12        | A         |
| Forward On Voltage                                   | $V_{SD}$     | $T_j=25^\circ C, I_{SD}=4$ A, $V_{GS}=0$ V                  |                        | 1    | 1.3       | V         |
| Reverse Recovery Time                                | $t_{rr}$     | $T_j=25^\circ C, I_F=4$ A, $di/dt=100A/\mu s$               |                        | 150  |           | nS        |
| Reverse Recovery Charge                              | $Q_{rr}$     |   |                        | 0.85 |           | uC        |
| Peak reverse recovery current                        | $I_{rrm}$    |   |                        | 11   |           | A         |

Notes: 1.Repetitive Rating: Pulse width limited by maximum junction temperature


2.  $T_j=25^\circ C, V_{DD}=50$  V,  $V_{GS}=10$  V,  $R_G=25\Omega$

## TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS (curves)


**Figure1. Safe operating area**

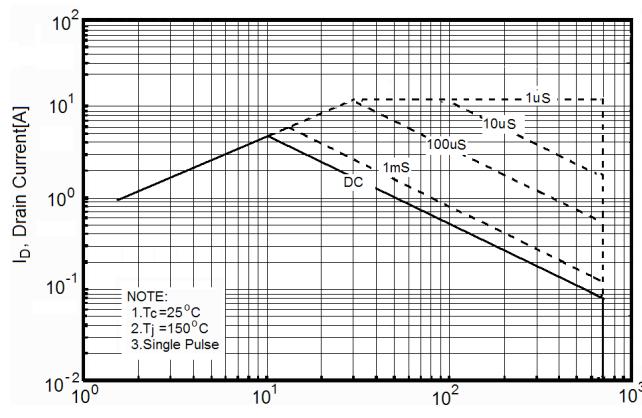


**Figure2. Source-Drain Diode Forward Voltage**

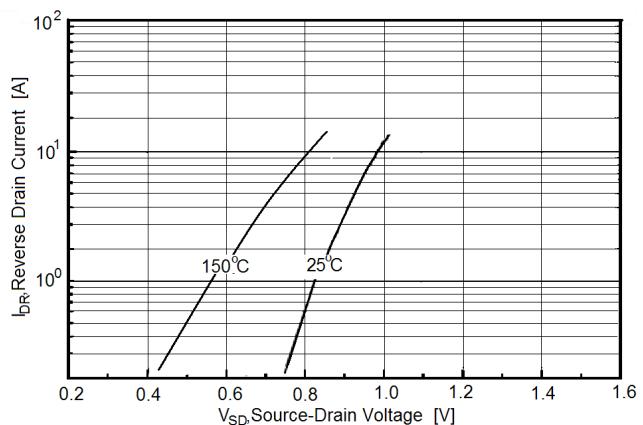


**Figure3. Output characteristics**

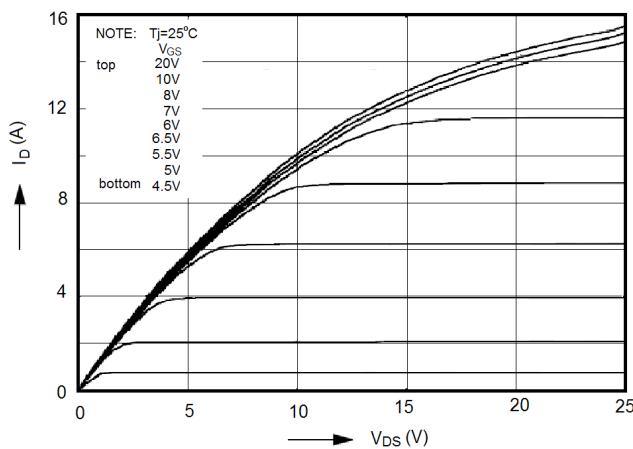


**Figure4. Transfer characteristics**

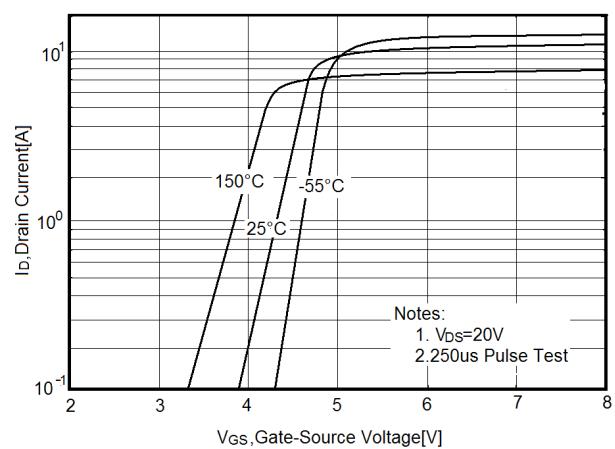


**Figure5. Static drain-source on resistance**

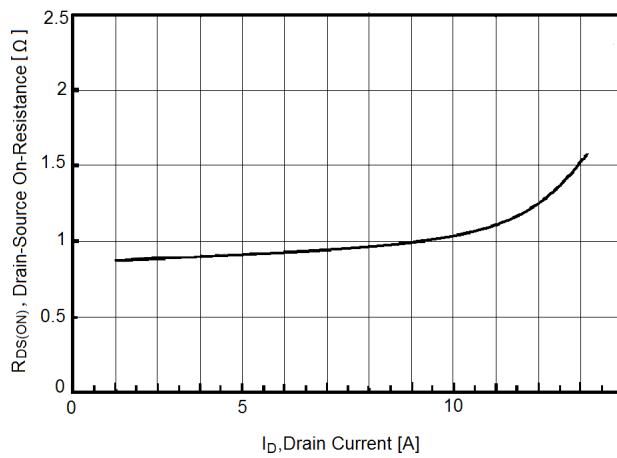


**Figure6.  $R_{DS(\text{ON})}$  vs Junction Temperature**

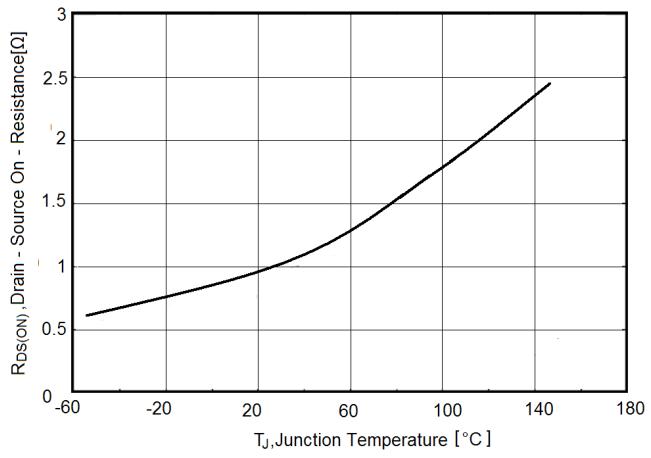


**Figure7.  $BV_{DSS}$  vs Junction Temperature**

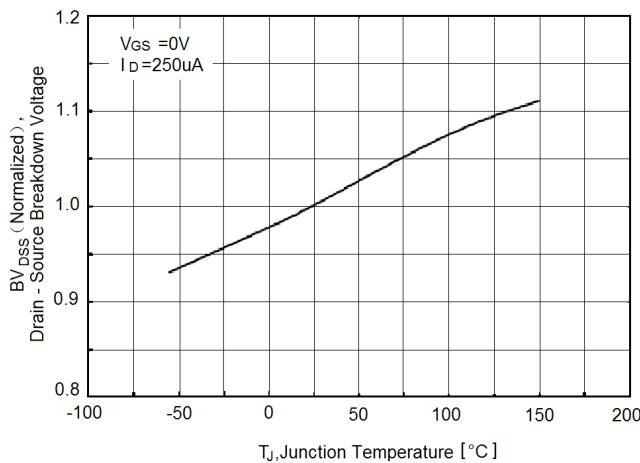


**Figure8. Maximum  $I_D$  vs Junction Temperature**

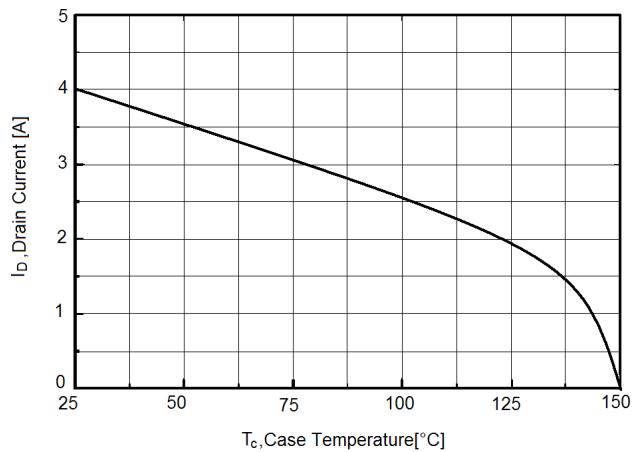


**Figure9. Gate charge waveforms**

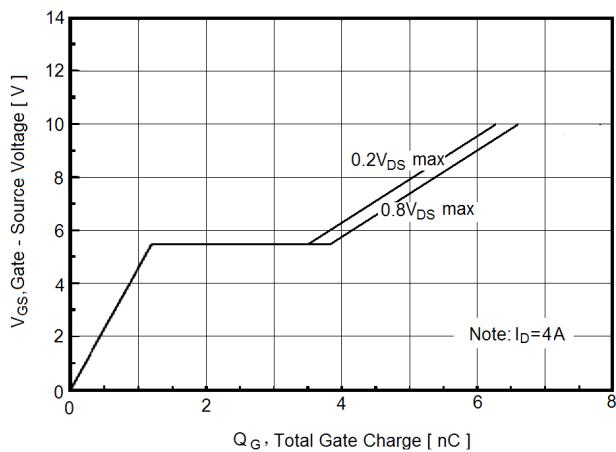

**Figure10. Capacitance**

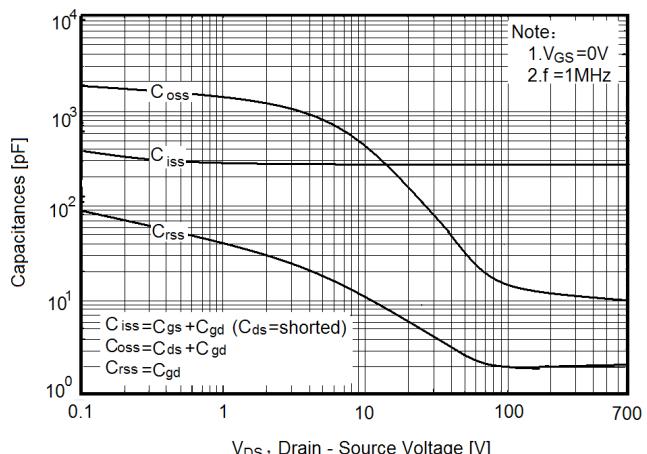


**Figure11. Transient Thermal Impedance**

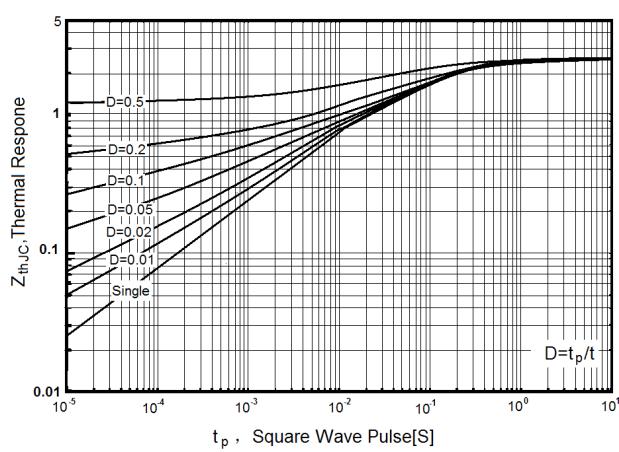


## Test circuit


### 1) Gate charge test circuit & Waveform

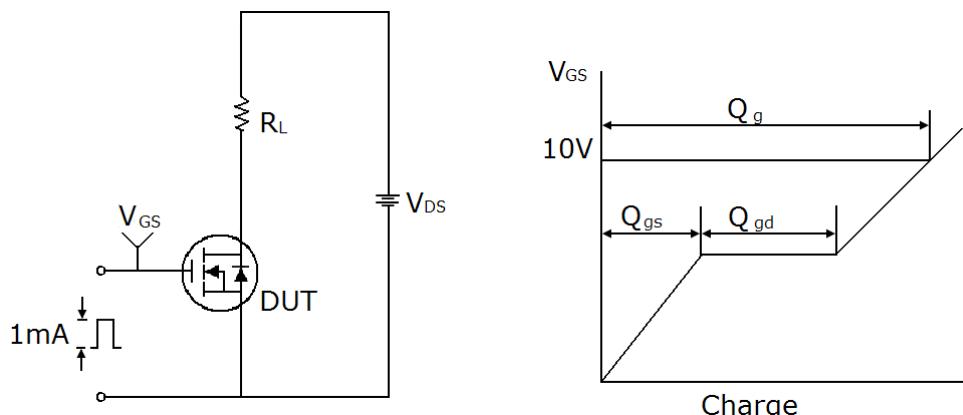


### 2) Switch Time Test Circuit:

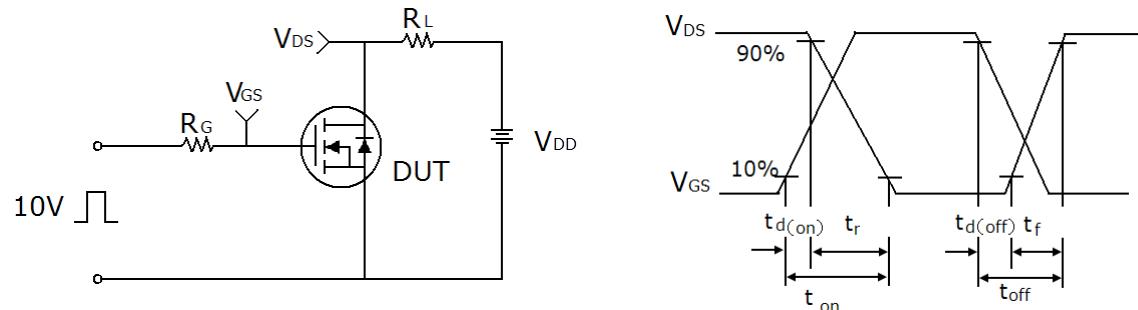

### 3) Unclamped Inductive Switching Test Circuit & Waveforms

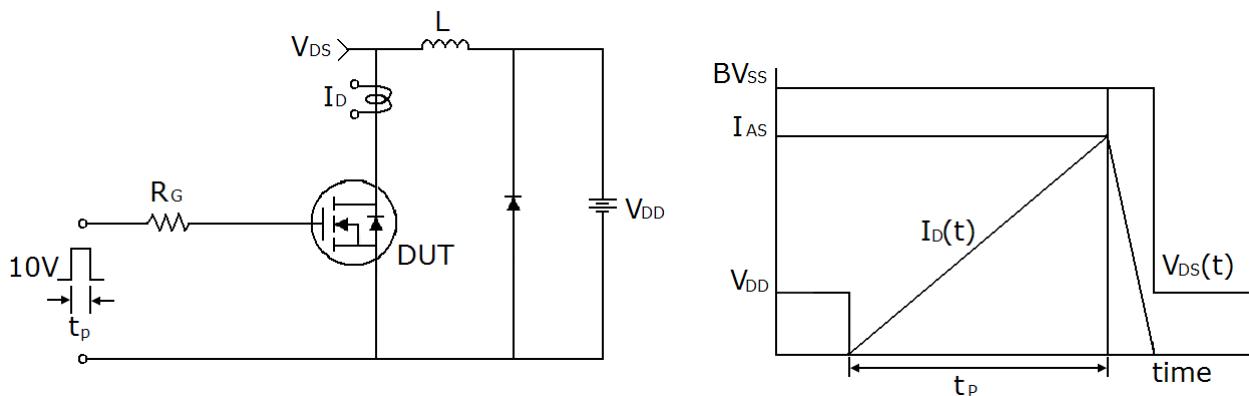


## TO-251 Package Information

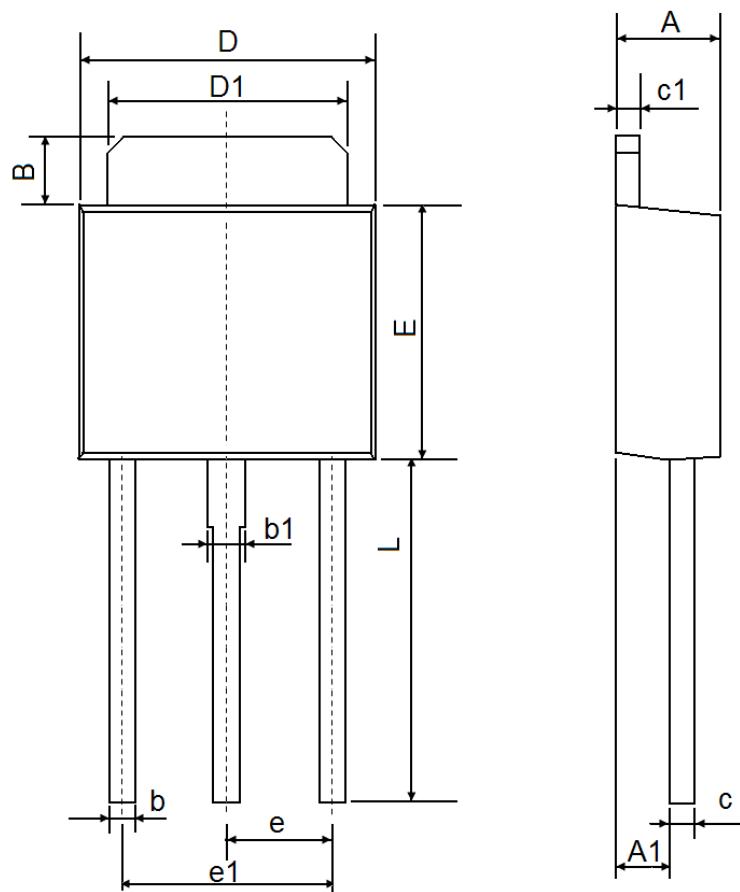

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      | 2.200                     | 2.400 | 0.087                | 0.094 |
| A1     | 1.050                     | 1.350 | 0.042                | 0.054 |
| B      | 1.350                     | 1.650 | 0.053                | 0.065 |
| b      | 0.500                     | 0.700 | 0.020                | 0.028 |
| b1     | 0.700                     | 0.900 | 0.028                | 0.035 |
| c      | 0.430                     | 0.580 | 0.017                | 0.023 |
| c1     | 0.430                     | 0.580 | 0.017                | 0.023 |
| D      | 6.350                     | 6.650 | 0.250                | 0.262 |
| D1     | 5.200                     | 5.400 | 0.205                | 0.213 |
| E      | 5.400                     | 5.700 | 0.213                | 0.224 |
| e      | 2.300 TYP.                |       | 0.091 TYP.           |       |
| e1     | 4.500                     | 4.700 | 0.177                | 0.185 |
| L      | 7.500                     | 7.900 | 0.295                | 0.311 |

## TO-252 Package Information

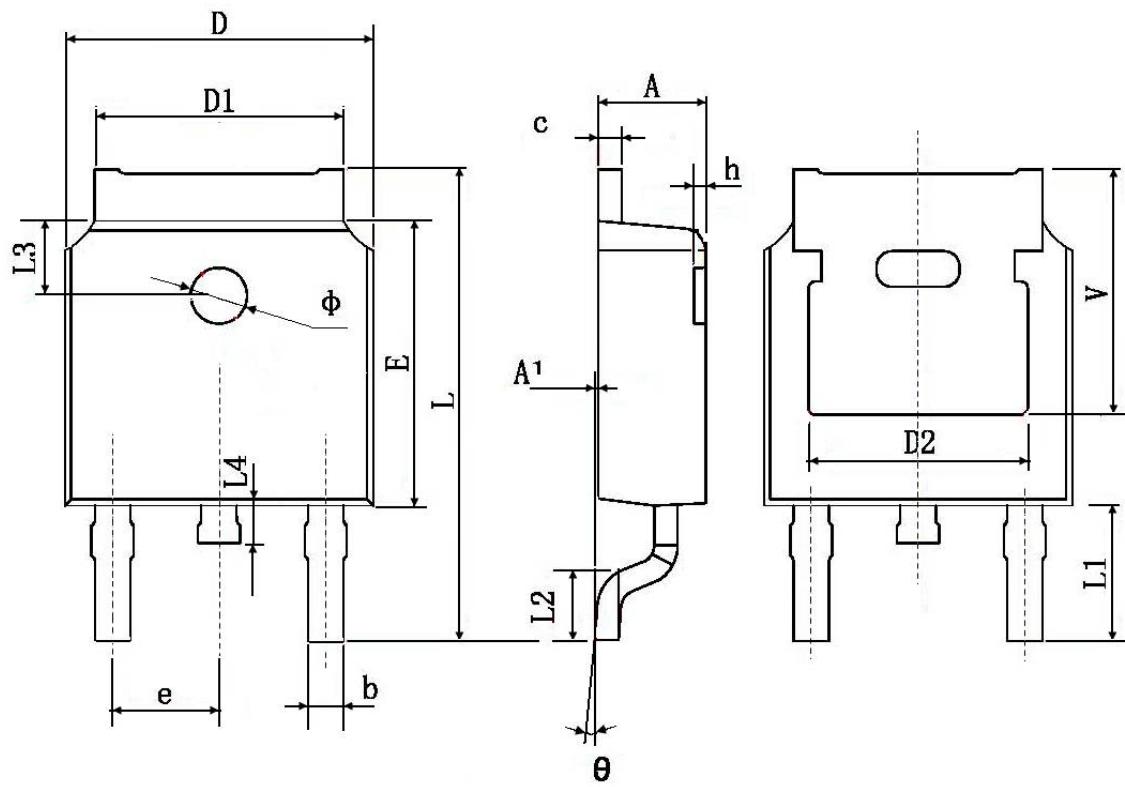

| Symbol | Dimensions In Millimeters |        | Dimensions In Inches |       |
|--------|---------------------------|--------|----------------------|-------|
|        | Min.                      | Max.   | Min.                 | Max.  |
| A      | 2.200                     | 2.400  | 0.087                | 0.094 |
| A1     | 0.000                     | 0.127  | 0.000                | 0.005 |
| b      | 0.660                     | 0.860  | 0.026                | 0.034 |
| c      | 0.460                     | 0.580  | 0.018                | 0.023 |
| D      | 6.500                     | 6.700  | 0.256                | 0.264 |
| D1     | 5.100                     | 5.460  | 0.201                | 0.215 |
| D2     | 4.830 TYP.                |        | 0.190 TYP.           |       |
| E      | 6.000                     | 6.200  | 0.236                | 0.244 |
| e      | 2.186                     | 2.386  | 0.086                | 0.094 |
| L      | 9.800                     | 10.400 | 0.386                | 0.409 |
| L1     | 2.900 TYP.                |        | 0.114 TYP.           |       |
| L2     | 1.400                     | 1.700  | 0.055                | 0.067 |
| L3     | 1.600 TYP.                |        | 0.063 TYP.           |       |
| L4     | 0.600                     | 1.000  | 0.024                | 0.039 |
| Φ      | 1.100                     | 1.300  | 0.043                | 0.051 |
| θ      | 0°                        | 8°     | 0°                   | 8°    |
| h      | 0.000                     | 0.300  | 0.000                | 0.012 |
| V      | 5.350 TYP.                |        | 0.211 TYP.           |       |

## ATTENTION:

- Any and all H&M SEMI products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your H&M SEMI representative nearest you before using any H&M SEMI products described or contained herein in such applications.
- H&M SEMI assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all H&M SEMI products described or contained herein.
- Specifications of any and all H&M SEMI products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- H&M Semiconductor CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all H&M SEMI products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of H&M Semiconductor CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. H&M SEMI believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the H&M SEMI product that you intend to use.
- This catalog provides information as of Sep.2010. Specifications and information herein are subject to change without notice.