

## 25mΩ Adjustable Current-Limited Power Switch

### FEATURES

- 25 mΩ High-Side MOSFET in SOT23-5
- 1.50~4.0 A Adjustable Current Limit
- Built-in Soft-Start
- Available SOT23-5 package

heavy capacitive loads and short-circuits are likely to be encountered. These devices offer a programmable current-limit threshold between 1.5A and 4.0A (typ) via an external resistor.

HM9703C will enter hiccup mode when OUT voltage is less than 3V or OTSD. It can significant reduce the output current and reduce thermal effect to the system.

HM9703C devices limit the output current to a safe level by switching into a constant-current mode when the output load exceeds the current-limit threshold.


### APPLICATIONS

- USB Charger
- USB Wall Adapter
- Car Charger

### DESCRIPTION

HM9703C is a 25mΩ adjustable current limited power switch intended for applications where

### PACKAGE AND APPLICATION

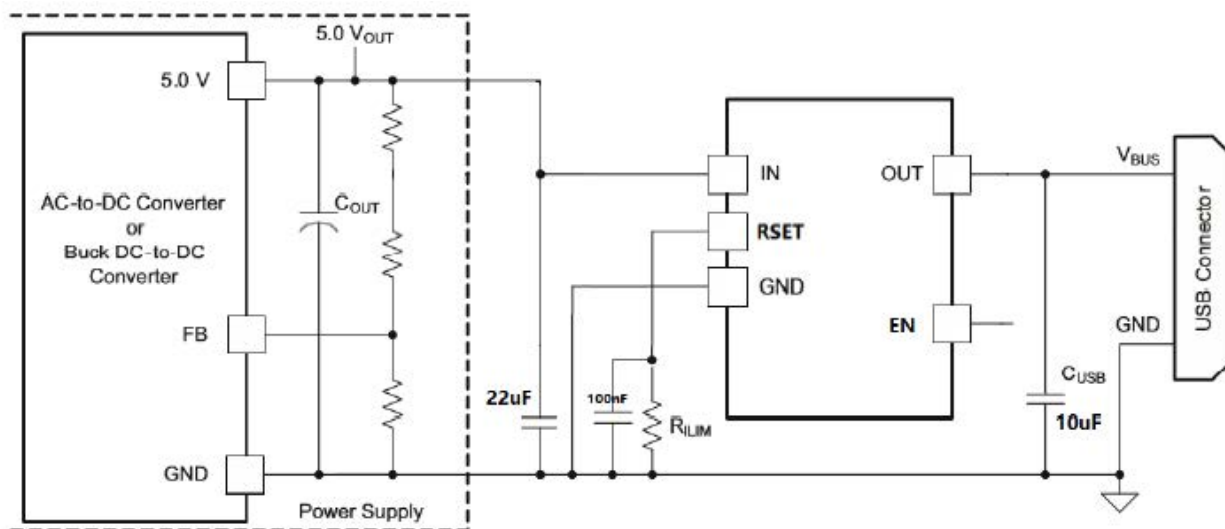


### ORDING INFORMATION

Part Number	Package Type	Package Qty	Op Temp(°C)	Mark
HM9703C	SOT23-5	3000	-40~85	白板

## 25mΩ Adjustable Current-Limited Power Switch

### PINOUT

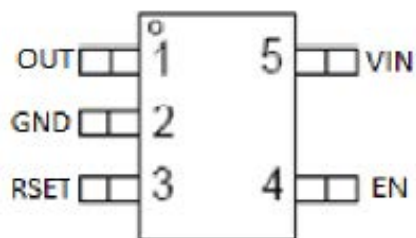

### PIN FUNCTIONS

Pin Name	TYPE <sup>(1)</sup>		DESCRIPTION
	SOT23-5		
OUT	1	O	Power-switch output, connected to VBUS of USB; connect a 10μF or greater ceramic capacitor from OUT to GND as close to the IC as possible
GND	2	G	Ground connection
RSET	3	I	External resistor used to set current-limit threshold;
EN	4	I	Enable input, logic high turns on HM9703C
VIN	5	P/I	Power supply/Input voltage connected to Power Switch; connect a 10μF or greater ceramic capacitor from IN to GND as close to the IC as possible

(1) G = Ground, I = Input, O = Output, P = Power

## 25mΩ Adjustable Current-Limited Power Switch

### ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

Over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		MIN	MAX	UNIT
Supply Voltage Range	IN, OUT	-0.3	7.0	V
ESD rating, Human Body Model (HBM)	IN, OUT		6	kV
Operating Junction Temperature	T <sub>J</sub>	-40	125	°C
Storage Temperature Range	T <sub>stg</sub>	-65	150	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### THERMAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

THERMAL METRIC			UNIT
θ <sub>JA</sub>	SOT23-5 Package thermal impedance <sup>(1)</sup>	165	°C/W

- (1) The package thermal impedance is calculated in accordance with JESD 51-7.

### RECOMMENDED OPERATING CONDITIONS

PARAMETER		MIN	MAX	UNIT
V <sub>IN</sub>	Input voltage of IN	4.5	6.5	V
V <sub>DP/DM</sub>	DP data line input voltage		5.5	
I <sub>DP/DM</sub>	Continuous sink/source current		±10	mA
R <sub>SET</sub>	Resistance of R <sub>SET</sub>	13	100	kΩ
I <sub>OUT</sub>	Continuous sink/source current	2000	4000	mA
T <sub>J</sub>	Operating Junction Temperature	-40	125	°C

## 25mΩ Adjustable Current-Limited Power Switch


### ELECTRICAL CHARACTERISTICS

Conditions are: TA = 25°C, IN = 5.0 V, Positive current are into pins. All voltages are with respect to GND (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Switch						
R <sub>DS(on)</sub>	SOT23-5	I <sub>OUT</sub> =2.4A	25		mΩ	
Current Limit						
I <sub>OUT</sub>	OUT current limited	BIN1:RSET=19.1k BIN2:RSET=22K	2.5	2.7	2.9	A
SUPPLY CURRENT						
I <sub>IN</sub>	IN supply current	IN= 5.0V,	230		400	μA
I <sub>INL</sub>	IN Disable Supply Current	IN= 5.0V	0		5	
Thermal Shutdown						
T <sub>OTSD</sub>	Temperature Rising Threshold		150		°C	
T <sub>HYS</sub>	Hysteresis		20			
Enable Pin(EN)						
V <sub>EN</sub>	ENB threshold voltage, rising		3		V	
V <sub>ENB_HYS</sub>	Hysteresis		150		mV	

**25mΩ Adjustable Current-Limited Power Switch**

**FUNCTION BLOCK DIAGRAM**

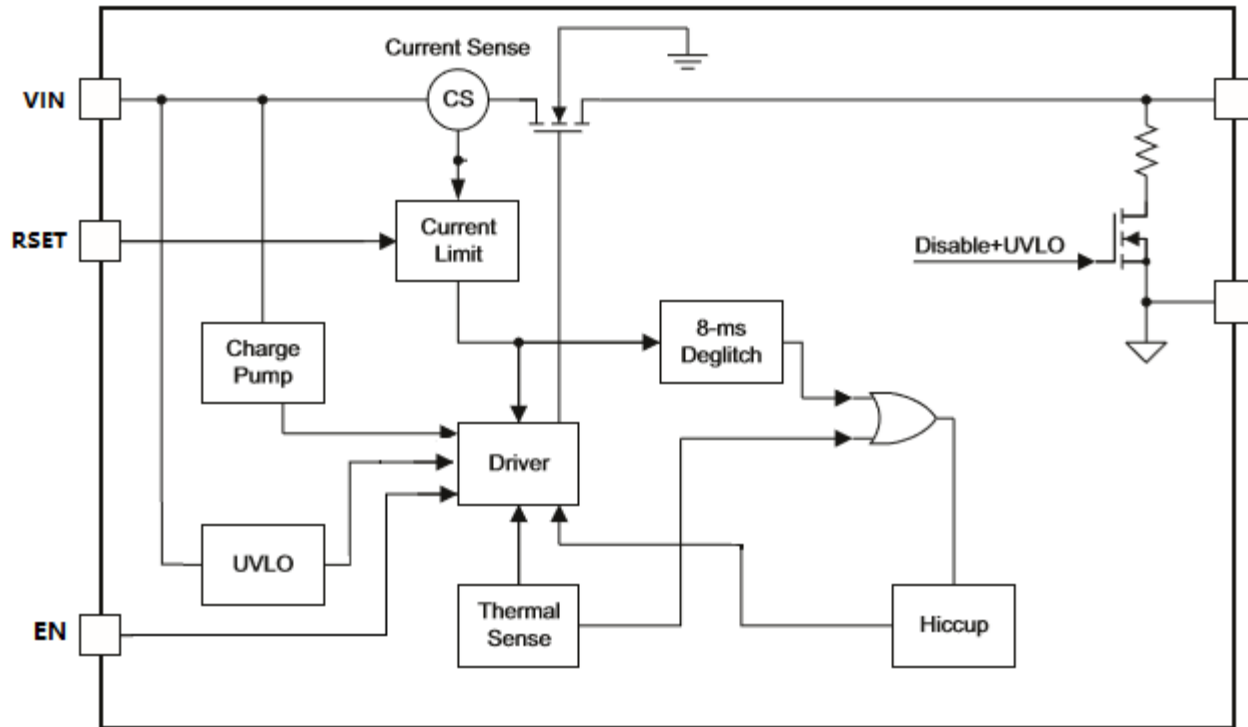

## 25m $\Omega$ Adjustable Current-Limited Power Switch

### PCB LAYOUT NOTIFICATION

Input capacitance CIN(red position) of the pin 5 of HM9703C:

The voltage entering the pin 5 must pass through the input capacitor CIN at a single point(单点过电容), the CIN must be close to the pin 5.


Output capacitance COUT(red position)of pin 1:

The pin1 to USB must pass through the output capacitor COUT and be close to pin 1.

Recommended capacitance CIN is 0805 size, value is 22 $\mu$ F;

Recommended capacitance COUT is 0805 size, value is 10 $\mu$ F;

Based the difference of AC/DC or DC/DC, the CIN and COUT can be increased or decreased

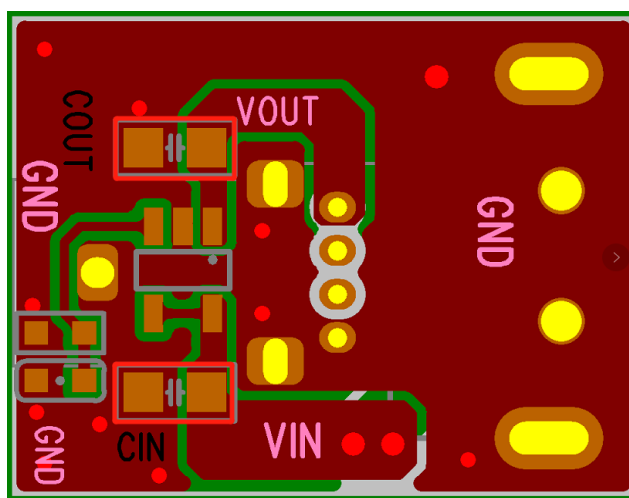

**25mΩ Adjustable Current-Limited Power Switch**

**PACKAGE INFORMATION**

SOT23-5

